

## N Male to N Male Low Loss Cable 60 Inch Length Using TCOM-240 Coax with Times Microwave Components



### RF Cable Assemblies Technical Data Sheet

**PE3C9805-60**

#### Configuration

- Connector 1: N Male
- Connector 2: N Male
- Cable Type: TCOM-240
- Coax Flex Type: Flexible

#### Features

- Max Frequency 6 GHz
- Double Shielded
- PE Jacket
- 500 Mating Cycles

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C9805-60 type N male to type N male 60 inch cable using TCOM-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible TCOM-240 coax. The PE3C9805-60 type N male to type N male cable assembly operates to 6 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	6	GHz
Insertion Loss (Typ.)	0.28	0.41	0.58	0.94	1.48	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of  $0.1 * \text{SQRT}(F\text{GHz})$  dB per connector.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable 60 Inch Length Using TCOM-240 Coax with Times Microwave Components PE3C9805-60](#)

## N Male to N Male Low Loss Cable 60 Inch Length Using TCOM-240 Coax with Times Microwave Components



### RF Cable Assemblies Technical Data Sheet

**PE3C9805-60**

#### Mechanical Specifications

**Cable Assembly**

Length*	60 in [152.4 cm]
Weight	0.308 lbs [139.71 g]

**Cable**

Cable Type	TCOM-240
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.24 in [6.1 mm]

**Connectors**

Description	Connector 1	Connector 2
Type	N Male Threaded	N Male Threaded
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	50 $\mu$ in minimum	50 $\mu$ in minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	80 $\mu$ in minimum	80 $\mu$ in minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	80 $\mu$ in minimum	80 $\mu$ in minimum

**Compliance Certifications** (see product page for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable 60 Inch Length Using TCOM-240 Coax with Times Microwave Components PE3C9805-60](#)

## N Male to N Male Low Loss Cable 60 Inch Length Using TCOM-240 Coax with Times Microwave Components



### RF Cable Assemblies Technical Data Sheet

**PE3C9805-60**

#### How to Order

Part Number Configuration:

**PE3C9805**- **xx****uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C9805-12 = 12 inches long cable  
PE3C9805-100cm = 100 cm long cable

N Male to N Male Low Loss Cable 60 Inch Length Using TCOM-240 Coax with Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable 60 Inch Length Using TCOM-240 Coax with Times Microwave Components PE3C9805-60](#)


URL: <https://www.pasternack.com/n-male-to-n-male-low-loss-cable-60-inch-length-using-tcom-240-pe3c9805-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C9805-60 CAD Drawing

N Male to N Male Low Loss Cable 60 Inch Length Using  
TCOM-240 Coax with Times Microwave Components

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	06/26/2023	KGIEBOVA	AGANVANI

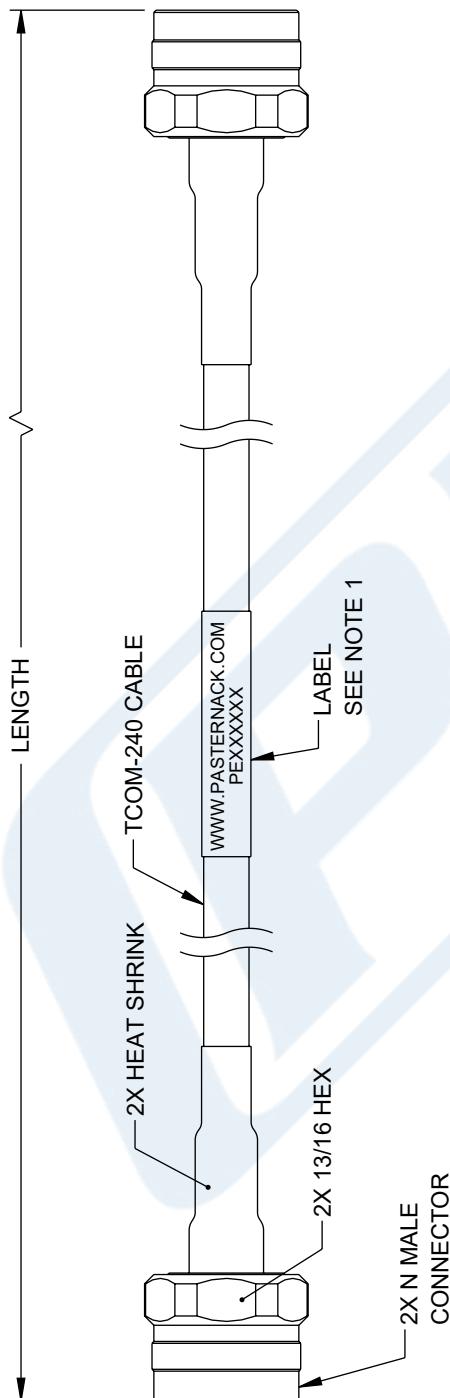

## NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:  
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.  
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES  
FROM EACH CONNECTOR.  
CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

2.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.  
THIS DRAWING IS FOR THE COMMERCIAL, TECHNICAL REGULATIONS, OR SOFTWARE FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

<b>PASTERNACK®</b> an INFINITI® brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE NONE 1 OF 1		REV A																
<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</p> <p><b>TOLERANCES:</b></p> <table border="1"> <tr> <td><math>X = \pm 0.2 [5]</math></td> <td>FRACTIONS</td> </tr> <tr> <td><math>XX = \pm 0.02 [0.5]</math></td> <td><math>\pm 1/32</math></td> </tr> <tr> <td><math>XXX = \pm 0.005 [0.13]</math></td> <td>ANGLES <math>\pm 1^\circ</math></td> </tr> </table> <p>CABLE LENGTH TOLERANCES:</p> <table border="1"> <tr> <td><math>\le 12 [305]</math></td> <td><math>= +1 1/25</math></td> </tr> <tr> <td><math>&gt;12 [305] - 60 [1524]</math></td> <td><math>= +2 [51] - 0</math></td> </tr> <tr> <td><math>&gt;60 [1524] - 120 [3048]</math></td> <td><math>= +4 [102] - 0</math></td> </tr> <tr> <td><math>&gt;120 [3048] - 300 [7620]</math></td> <td><math>= +6 [152] - 0</math></td> </tr> <tr> <td><math>&gt;300 [7620] - 700 [17782]</math></td> <td><math>= +5% - 0</math></td> </tr> </table>					$X = \pm 0.2 [5]$	FRACTIONS	$XX = \pm 0.02 [0.5]$	$\pm 1/32$	$XXX = \pm 0.005 [0.13]$	ANGLES $\pm 1^\circ$	$\le 12 [305]$	$= +1 1/25$	$>12 [305] - 60 [1524]$	$= +2 [51] - 0$	$>60 [1524] - 120 [3048]$	$= +4 [102] - 0$	$>120 [3048] - 300 [7620]$	$= +6 [152] - 0$	$>300 [7620] - 700 [17782]$	$= +5% - 0$
$X = \pm 0.2 [5]$	FRACTIONS																			
$XX = \pm 0.02 [0.5]$	$\pm 1/32$																			
$XXX = \pm 0.005 [0.13]$	ANGLES $\pm 1^\circ$																			
$\le 12 [305]$	$= +1 1/25$																			
$>12 [305] - 60 [1524]$	$= +2 [51] - 0$																			
$>60 [1524] - 120 [3048]$	$= +4 [102] - 0$																			
$>120 [3048] - 300 [7620]$	$= +6 [152] - 0$																			
$>300 [7620] - 700 [17782]$	$= +5% - 0$																			
<p>WEBSITE: <a href="http://www.Pasternack.com">www.Pasternack.com</a> PHONE: 1.866.727.8376   1.949.261.1920</p> <p>DESCRIPTION</p> <p><b>N MALE TO N MALE LOW LOSS CABLE USING TCOM-240 COAX WITH TIMES MICROWAVE COMPONENTS</b></p>																				
ITEM NO. PE3C9805	ITEM NO. KGLB0VA	CAGE CODE A 53919	DRAWN BY KGLB0VA	SIZE A																