

BNC Male to Straight Cut Lead Cable Using RG178 Coax





PE3564

Configuration

- Connector 1: BNC Male
- Connector 2: Straight Cut Lead
- Cable Type: RG178
- Coax Flex Type: Flexible

Features

- 70% Phase Velocity
- FEP Jacket

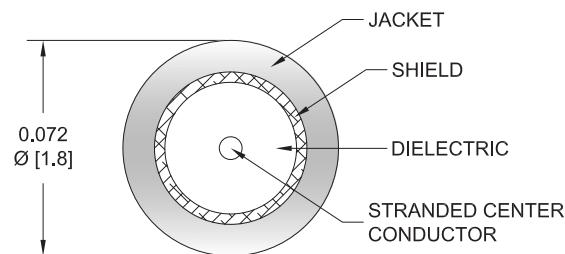

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3564 50 ohm BNC male to straight cut lead cable using RG178 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Weight

0.042 lbs [19.05 g]

Cable

Cable Type

RG178

Impedance

50 Ohms

Inner Conductor Type

Stranded

Inner Conductor Material and Plating

Copper Clad Steel, Silver

Dielectric Type

PTFE

Number of Shields

1

Shield Layer 1

Silver Plated Copper Braid

Jacket Material

FEP, Tan

BNC Male to Straight Cut Lead Cable Using RG178 Coax



PE3564

Jacket Diameter	0.072 in [1.83 mm]
Repeated Minimum Bend Radius	0.4 in [10.16 mm]

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	Straight Cut Lead
Specification	MIL-STD-348A	
Impedance	50 Ohms	0 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	
Contact Plating Specification	30 µin minimum	
Dielectric Type	PTFE	
Body Material and Plating	Brass, Nickel	
Body Plating Specification	100 µin minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 µin minimum	

Environmental Specifications

Compliance Certifications (see product page for current document)


Plotted and Other Data

Notes:

BNC Male to Straight Cut Lead Cable Using RG178 Coax

**PE3564****Typical Performance Data****How to Order**

Part Number Configuration:

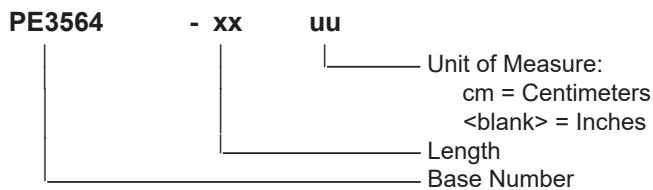

Example: PE3564-12 = 12 inches long cable
PE3564-100cm = 100 cm long cable

BNC Male to Straight Cut Lead Cable Using RG178 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Straight Cut Lead Cable Using RG178 Coax PE3564](#)

URL: <https://www.pasternack.com/bnc-male-to-straight-cut-lead-cable-using-rg178-pe3564-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3564 CAD Drawing

BNC Male to Straight Cut Lead Cable Using RG178 Coax

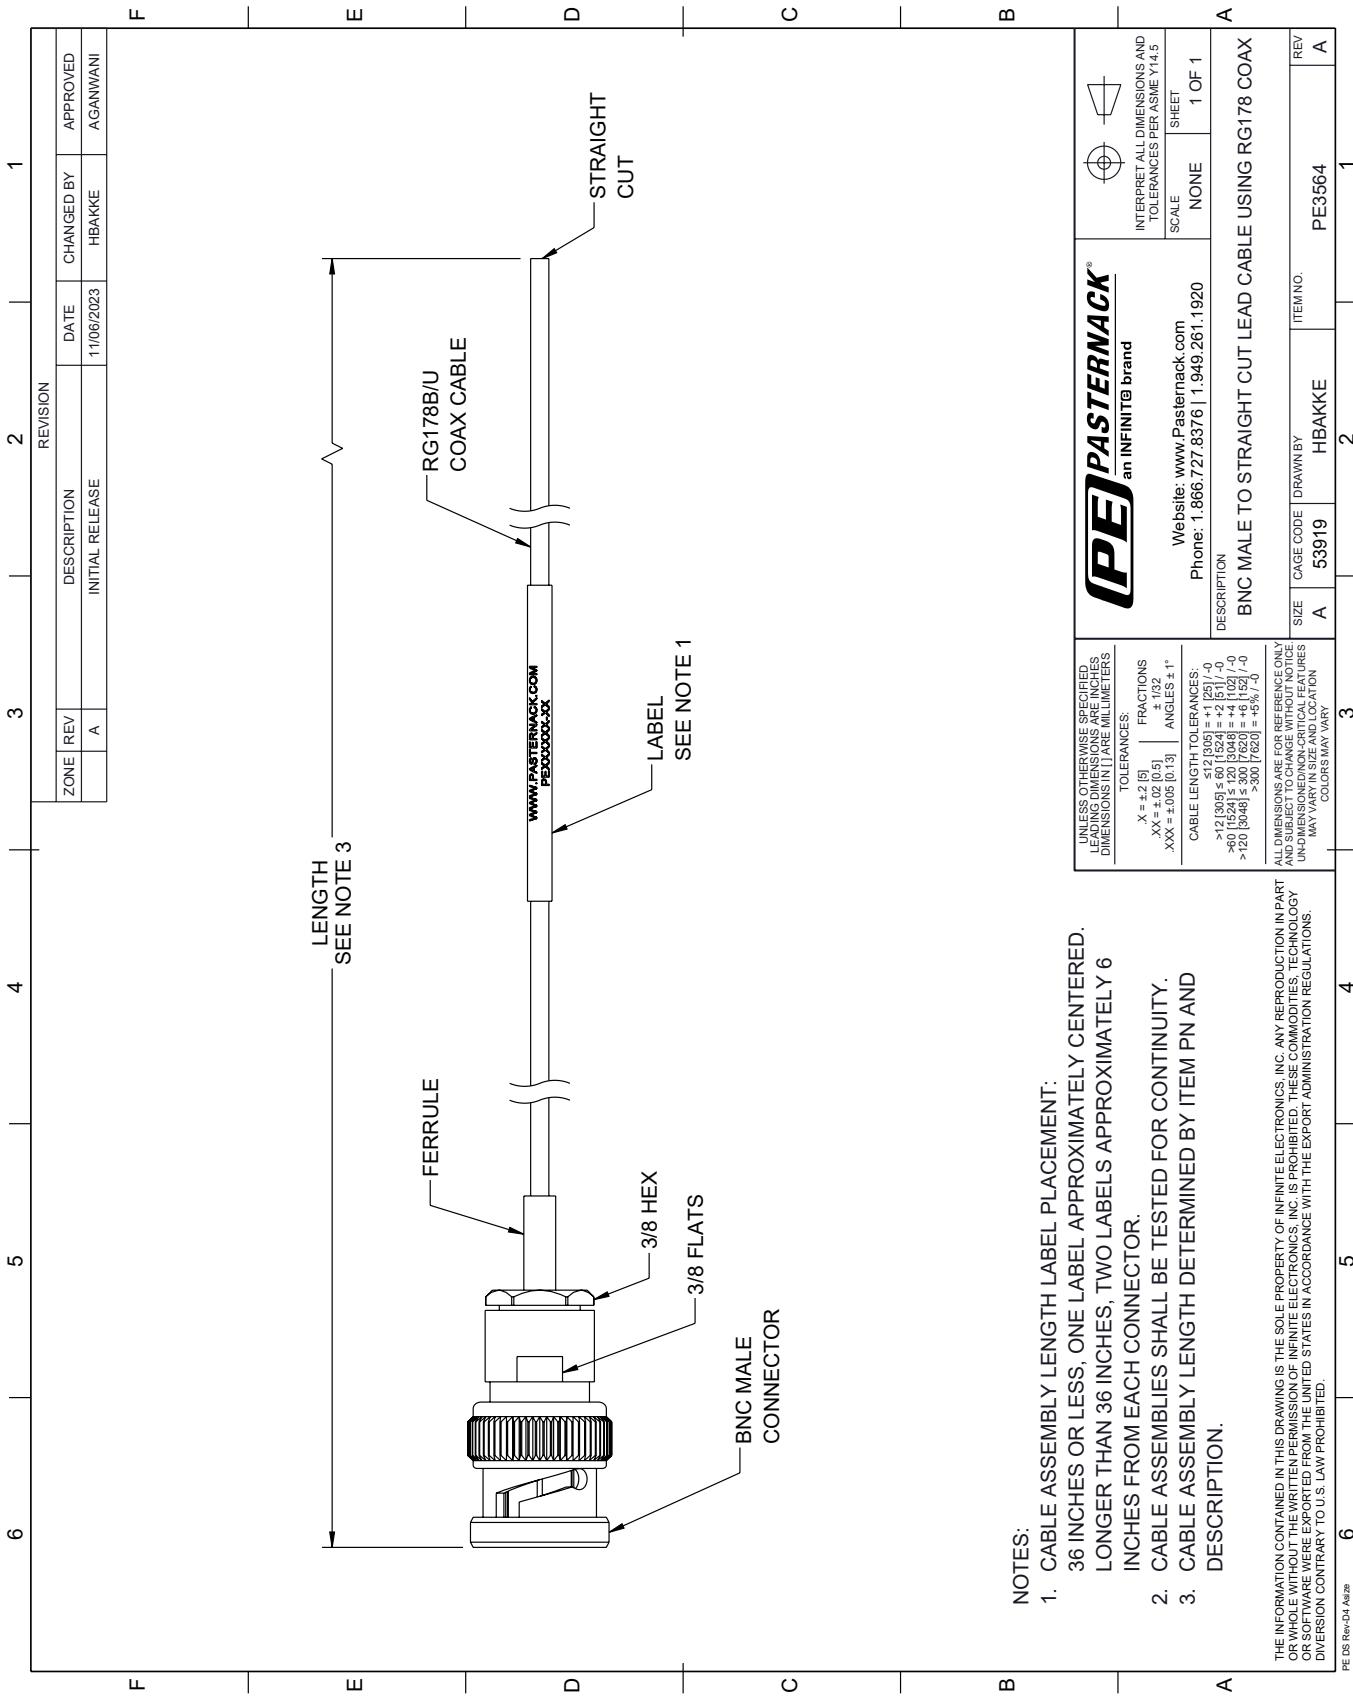

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	53919	HBAKKE	PE3564	A

1	2	3	4	5	6
1	2	3	4	5	6