

Reverse Polarity SMA Plug Right Angle to SMA Male Cable Using RG142 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet


PE35911/HS

Configuration

- Connector 1: SMA Plug Reverse Polarity Right Angle
- Connector 2: SMA Male
- Cable Type: RG142

Features

- 70% Phase Velocity
- Double Shielded
- FEP Jacket

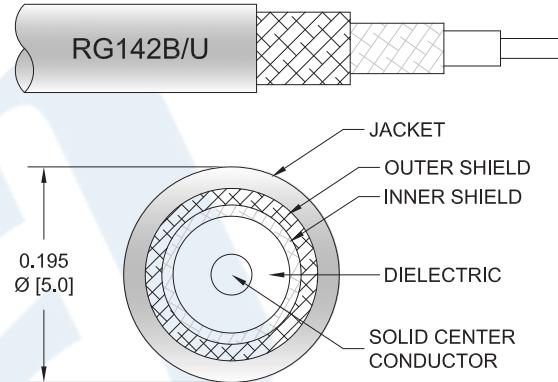

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE35911/HS reverse polarity SMA plug right angle to SMA male cable using RG142 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack reverse polarity SMA to SMA cable assembly has a plug to male gender configuration with 50 ohm flexible RG142 coax. The right angle SMA interface on the RG142 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

Mechanical Specifications

Cable Assembly

Weight	0.072 lbs [32.66 g]
--------	---------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Plug Right Angle to SMA Male Cable Using RG142 Coax with Heat-Shrink PE35911/HS](#)



Reverse Polarity SMA Plug Right Angle to SMA Male Cable Using RG142 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE35911/HS

Cable

Cable Type	RG142
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.195 in [4.95 mm]

Repeated Minimum Bend Radius

1 in [25.4 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Plug Reverse Polarity Right Angle	SMA Male
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification		50 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification		100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification		100 μ in minimum
Hex Size	5/16 inch	5/16 inch
Torque	3 in-lbs [0.34 Nm]	3 in-lbs [0.34 Nm]

Environmental Specifications

Temperature

Operating Range

-55 to +200 deg C

Compliance Certifications

(see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Plug Right Angle to SMA Male Cable Using RG142 Coax with Heat-Shrink PE35911/HS](#)




Reverse Polarity SMA Plug Right Angle to SMA Male Cable Using RG142 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE35911/HS

How to Order

Part Number Configuration:

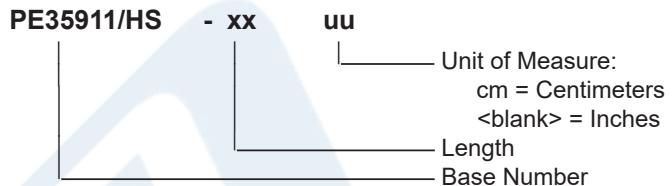

Example: PE35911/HS-12 = 12 inches long cable
PE35911/HS-100cm = 100 cm long cable

Reverse Polarity SMA Plug Right Angle to SMA Male Cable Using RG142 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Plug Right Angle to SMA Male Cable Using RG142 Coax with HeatShrink PE35911/HS](#)

URL: <https://www.pasternack.com/reverse-polarity-sma-plug-right-angle-to-sma-male-cable-using-rg142-with-heatshrink-pe35911-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE35911/HS CAD Drawing
 Reverse Polarity SMA Plug Right Angle to SMA Male
 Cable Using RG142 Coax with HeatShrink

