


1.85mm Male to 1.85mm Male Cable  
 Using PE-047SR Coax, RoHS


## RF Cable Assemblies Technical Data Sheet

PE36519LF

**Configuration**

- Connector 1: 1.85mm Male
- Connector 2: 1.85mm Male
- Cable Type: PE-047SR

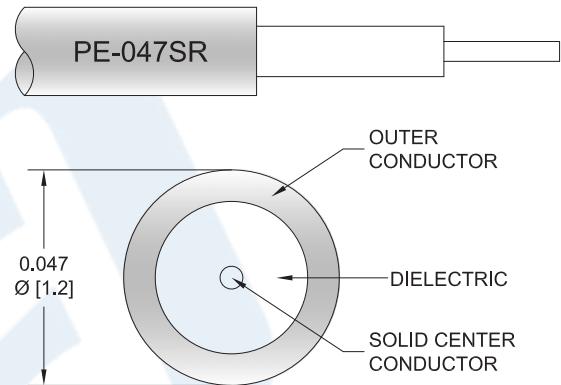
**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.45:1	

**Mechanical Specifications**
**Cable Assembly**

Diameter	0.312 in [7.92 mm]
Weight	0.031 lbs [14.06 g]
One Time Minimum Bend Radius	0.5 in [12.7 mm]

**Cable**

Cable Type	PE-047SR
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Copper

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Male to 1.85mm Male Cable Using PE-047SR Coax, RoHS PE36519LF](#)



## 1.85mm Male to 1.85mm Male Cable Using PE-047SR Coax, RoHS

### RF Cable Assemblies Technical Data Sheet

PE36519LF

#### Connectors

Description	Connector 1	Connector 2
Type	1.85mm Male	1.85mm Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Gold	Gold
Dielectric Type	PPO	PPO
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Hex Size	5/16 in.	5/16 in.
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel

#### Compliance Certifications

 (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

 RoHS Compliant  
 REACH Compliant

 Yes  
 12/19/2011

#### Plotted and Other Data

Notes:  
 • Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Male to 1.85mm Male Cable Using PE-047SR Coax, RoHS PE36519LF](#)




## 1.85mm Male to 1.85mm Male Cable Using PE-047SR Coax, RoHS

### RF Cable Assemblies Technical Data Sheet

PE36519LF

#### How to Order

Part Number Configuration:

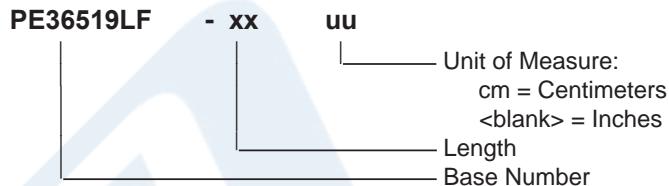

Example: PE36519LF-12 = 12 inches long cable  
PE36519LF-100cm = 100 cm long cable

1.85mm Male to 1.85mm Male Cable Using PE-047SR Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Male to 1.85mm Male Cable Using PE-047SR Coax, RoHS PE36519LF](#)

URL: <http://www.pasternack.com/1.85mm-male-1.85mm-male-pe-047sr-cable-assembly-pe36519lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE36519LF CAD Drawing

1.85mm Male to 1.85mm Male Cable Using PE-047SR Coax, RoHS

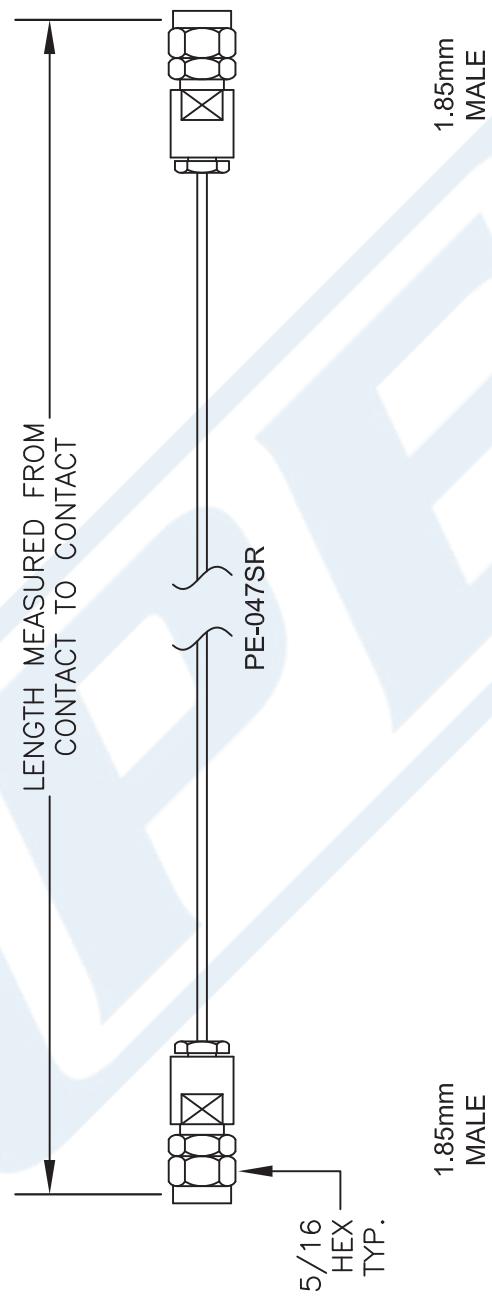

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

PASTERNAK®	DWG TITLE
	<b>PE36519LF</b>

NOTES:			
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.			
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.			
3. DIMENSIONS ARE IN INCHES (mm).			
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$ , WHICHEVER IS GREATER.			
FSCM NO.	53919	CAD FILE	102015
SCALE	N/A	SIZE	A
			2233