

TNC Female Bulkhead to BNC Male Right Angle Low Loss Cable Using LMR-LW195 Coax



PE3W14952

Configuration

- Connector 1: TNC Female Bulkhead
- Connector 2: BNC Male Right Angle
- Cable Type: LMR-LW195
- Coax Flex Type: Flexible

Features

- Max Frequency 3 GHz
- Shielding Effectivity > 90 dB
- 80% Phase Velocity
- Double Shielded
- PE Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W14952 TNC female bulkhead to BNC male right angle cable using LMR-LW195 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to BNC cable assembly has a female to male gender configuration with 50 ohm flexible LMR-LW195 coax. The PE3W14952 TNC female to BNC male cable assembly operates to 3 GHz. The right angle BNC interface on the LMR-LW195 cable allows for easier connections in tight spaces. Our RF cable assembly with TNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		80		%
RF Shielding	90			dB
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		7.6 [24.93]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		18.1 [59.38]		Ohms/1000ft [Ohms/Km]
Operating Voltage (AC)			500	Vrms

TNC Female Bulkhead to BNC Male Right Angle Low Loss Cable Using LMR-LW195 Coax



PE3W14952

Electrical Specifications

Description	Minimum	Typical					Maximum	Units
Jacket Spark						3,000		Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	100	250	500	1000	3000	MHz	
PE3W14952	Custom Lengths Available	Insertion Loss (Typ.)	0.035	0.055	0.082	0.117	0.207	dB/ft	
			0.12	0.19	0.27	0.39	0.68	dB/m	
PE3W14952-12	12 inch	Insertion Loss (Typ.)	0.34	0.36	0.39	0.42	0.51	dB	0.102
PE3W14952-24	24 inch	Insertion Loss (Typ.)	0.37	0.41	0.47	0.54	0.72	dB	0.119
PE3W14952-36	36 inch	Insertion Loss (Typ.)	0.41	0.47	0.55	0.66	0.93	dB	0.135
PE3W14952-48	48 inch	Insertion Loss (Typ.)	0.44	0.52	0.63	0.77	1.13	dB	0.151
PE3W14952-60	60 inch	Insertion Loss (Typ.)	0.48	0.58	0.71	0.89	1.34	dB	0.167

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB

Loss due to Connector 2: 0.2 dB

Base Weight: 0.102 pounds

Additional Weight per Inch: 0.00134 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
Weight 0.102 lbs [46.27 g]

Cable

Cable Type LMR-LW195
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper
Dielectric Type Foam PE
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Aluminum
Jacket Material PE, Black
Jacket Diameter 0.195 in [4.95 mm]
One Time Minimum Bend Radius 0.5 in [12.7 mm]
Repeated Minimum Bend Radius 2 in [50.8 mm]
Bending Moment 0.2 lbs-ft [0.27 N-m]
Flat Plate Crush 15 lbs/in [0.27 Kg/mm]
Tensile Strength 40 lbs [18.14 Kg]

TNC Female Bulkhead to BNC Male Right Angle Low Loss Cable Using LMR-LW195 Coax



PE3W14952

Connectors

Description	Connector 1	Connector 2
Type	TNC Female Bulkhead	BNC Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 μ in minimum

Environmental Specifications

Operating Range Temperature

-40 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

TNC Female Bulkhead to BNC Male Right Angle Low Loss Cable Using LMR-LW195 Coax




PE3W14952

Typical Performance Data

How to Order

Part Number Configuration:

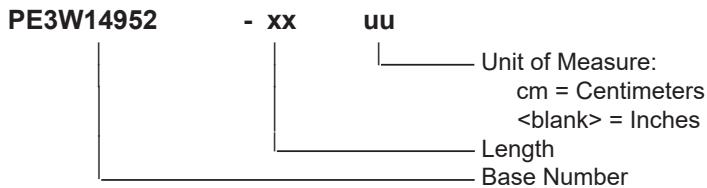

Example: PE3W14952-12 = 12 inches long cable
PE3W14952-100cm = 100 cm long cable

TNC Female Bulkhead to BNC Male Right Angle Low Loss Cable Using LMR-LW195 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Bulkhead to BNC Male Right Angle Low Loss Cable Using LMR-LW195 Coax PE3W14952](#)

URL: <https://www.pasternack.com/tnc-female-bulkhead-to-bnc-male-low-loss-cable-using-lmr-lw195-pe3w14952-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W14952 CAD Drawing

TNC Female Bulkhead to BNC Male Right Angle Low Loss Cable Using LMR-LW195 Coax

