

SMA Male Right Angle to SMA Male Right Angle Cable Using PE-SR405FLJ Coax with 180 Deg. Clock, LF Solder




RF Cable Assemblies Technical Data Sheet

PE39430/SP1


Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Male Right Angle
- Cable Type: PE-SR405FLJ



Features

- Max Frequency 10 GHz
- Shield Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket

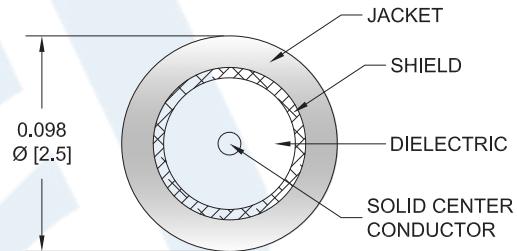

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE39430/SP1 SMA male right angle to SMA male right angle cable using PE-SR405FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm formable PE-SR405FLJ coax. The PE39430/SP1 SMA male to SMA male cable assembly operates to 10 GHz. The right angle SMA interfaces on the PE-SR405FLJ cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable Using PE-SR405FLJ Coax with 180 Deg. Clock, LF Solder PE39430/SP1](#)



SMA Male Right Angle to SMA Male Right Angle Cable Using PE-SR405FLJ Coax with 180 Deg. Clock, LF Solder

RF Cable Assemblies Technical Data Sheet

PE39430/SP1

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ω/1000ft [Ω/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	10	GHz
Insertion Loss (Typ.)	0.15	0.225	0.346	0.549	0.812	dB/ft
	0.49	0.74	1.14	1.8	2.66	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.033 lbs [14.97 g]

Cable

Cable Type PE-SR405FLJ
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Outer Conductor Material and Plating Tinned Copper Composite Braid
 Jacket Material FEP, Black
 Jacket Diameter 0.105 in [2.67 mm]

One Time Minimum Bend Radius 0.5 in [12.7 mm]
 Repeated Minimum Bend Radius 0.787 in [19.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable Using PE-SR405FLJ Coax with 180 Deg. Clock, LF Solder PE39430/SP1](#)



SMA Male Right Angle to SMA Male Right Angle Cable Using PE-SR405FLJ Coax with 180 Deg. Clock, LF Solder

RF Cable Assemblies Technical Data Sheet

PE39430/SP1

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Male Right Angle
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold over Nickel	Brass, Gold over Nickel
Contact Plating Specification	8 μ in minimum	8 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold over Nickel	Brass, Gold over Nickel
Body Plating Specification	4 μ in minimum	4 μ in minimum
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Hex Size	5/16 inch	5/16 inch
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]

Environmental Specifications

Temperature

Operating Range

-55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable Using PE-SR405FLJ Coax with 180 Deg. Clock, LF Solder PE39430/SP1](#)



SMA Male Right Angle to SMA Male Right Angle Cable Using PE-SR405FLJ Coax with 180 Deg. Clock, LF Solder

RF Cable Assemblies Technical Data Sheet

PE39430/SP1

How to Order

Part Number Configuration:

PE39430/SP1

- **xx** **uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE39430/SP1-12 = 12 inches long cable
PE39430/SP1-100cm = 100 cm long cable

SMA Male Right Angle to SMA Male Right Angle Cable Using PE-SR405FLJ Coax with 180 Deg. Clock, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable Using PE-SR405FLJ Coax with 180 Deg. Clock, LF Solder PE39430/SP1](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-sma-male-cable-using-pe-sr405flj-with-180-deg.-clock-lf-solder-pe39430-sp1-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE39430/SP1 CAD Drawing

SMA Male Right Angle to SMA Male Right Angle Cable Using PE-SR405FLJ Coax with 180 Deg. Clock, LF Solder

