



5 Section Lowpass Filter With SMA Female Connectors Operating From DC to 700 MHz With a 700 MHz Passband

TECHNICAL DATA SHEET

PE8727

Configuration

Design	Low Pass Filter
Connector 1	SMA Female
Connector 2	SMA Female
Passband Frequency Range, MHz	DC to 700

Electrical Specifications

Passband Minimum Frequency, KHz	0
Passband Maximum Frequency, MHz	700
Useable Frequency Range, MHz	DC to 700
Impedance, Ohms	50
Maximum Insertion Loss, dB	1
Passband Maximum VSWR	1.5:1
Maximum Input Power, Watts	10
Rejection at 1.05 GHz	40 dB
Rejection at 1.4 GHz	60 dB

Mechanical Specifications

Size	
Length, in [mm]	1.7 [43.18]
Width, in [mm]	0.75 [19.05]
Height, in [mm]	0.65 [16.51]

Connector 1	
Type	SMA Female

Connector 2	
Type	SMA Female

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
REACH Compliant	06/18/2012

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Section Lowpass Filter With SMA Female Connectors Operating From DC to 700 MHz With a 700 MHz Passband PE8727](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



5 Section Lowpass Filter With SMA Female Connectors Operating From DC to 700 MHz With a 700 MHz Passband

TECHNICAL DATA SHEET

PE8727

Plotted and Other Data

Notes:

Values at 25 °C, sea level

5 Section Lowpass Filter With SMA Female Connectors Operating From DC to 700 MHz With a 700 MHz Passband from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Section Lowpass Filter With SMA Female Connectors Operating From DC to 700 MHz With a 700 MHz Passband PE8727](#)

URL: <http://www.pasternack.com/5-section-low-pass-filter-0-mhz-700-mhz-passband-700-mhz-pe8727-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE8727 CAD Drawing

5 Section Lowpass Filter With SMA Female Connectors Operating
From DC to 700 MHz With a 700 MHz Passband

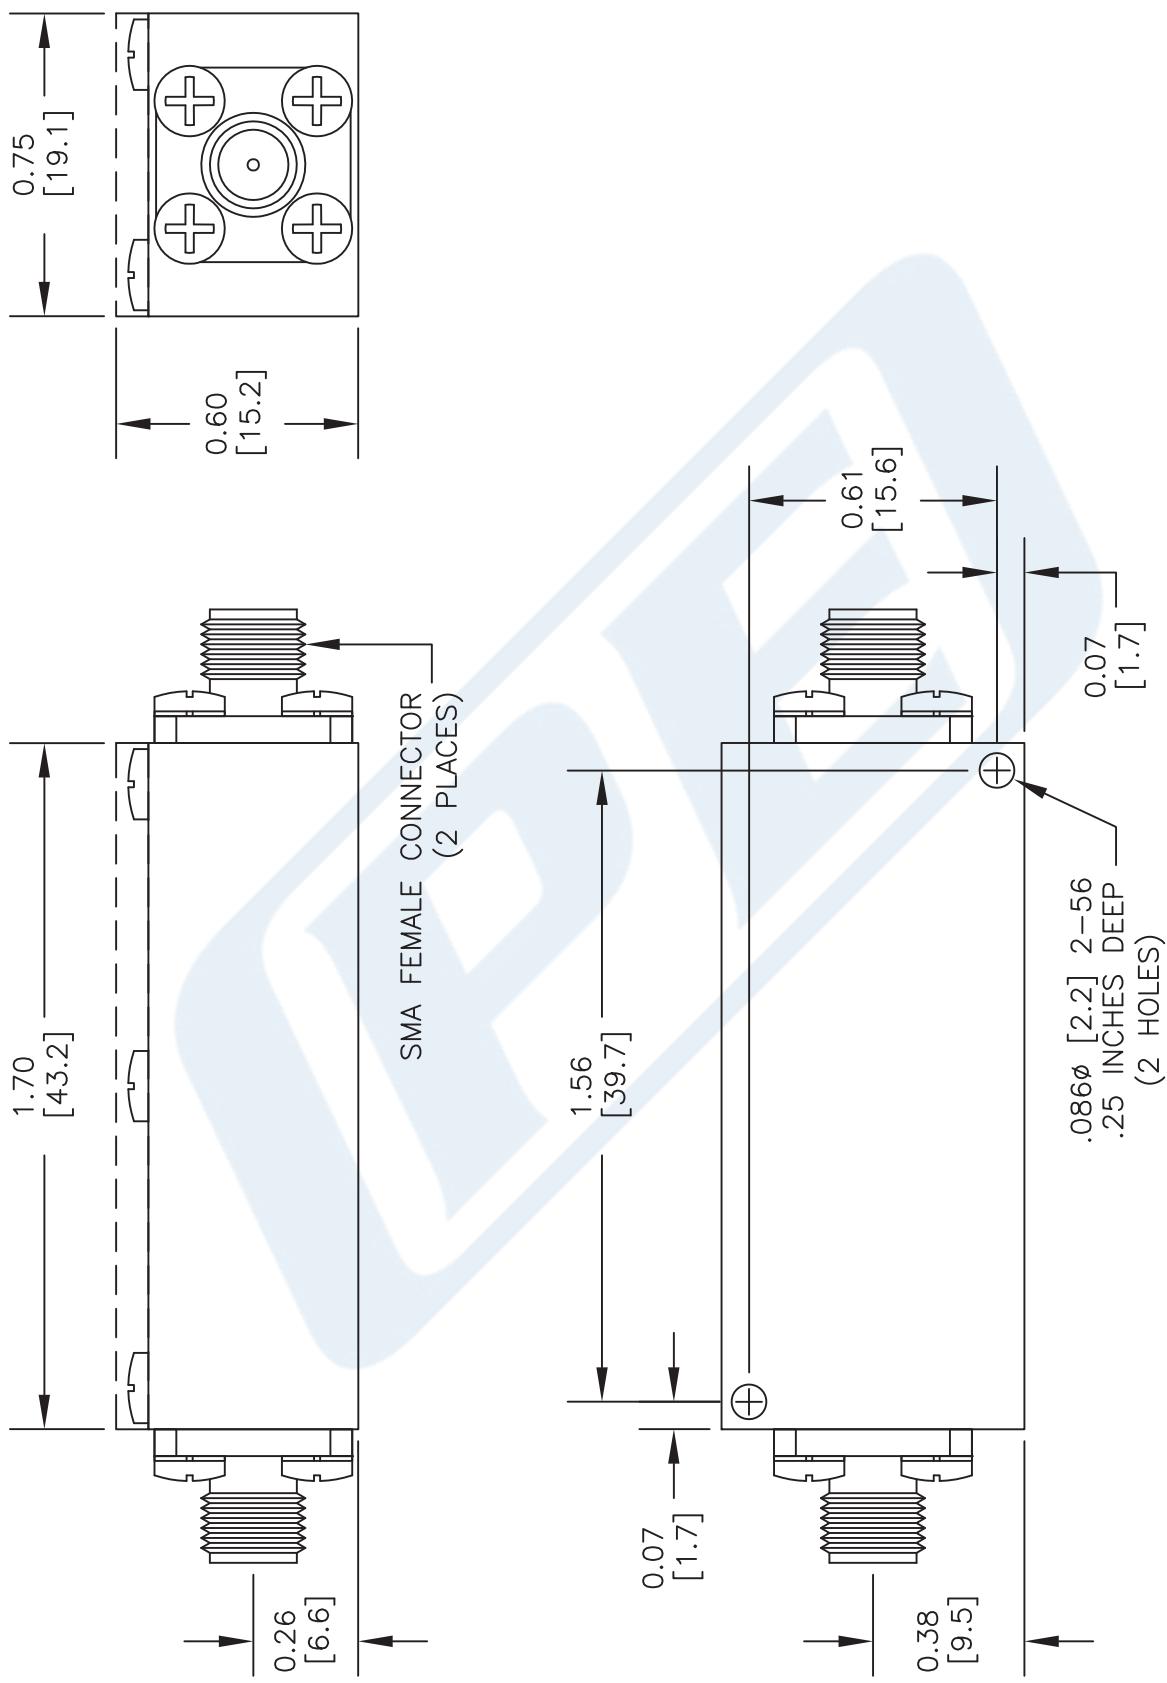

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

 PASTERNACK ENTERPRISES, INC. P.O. BOX 16759, IRVINE, CA 92623 PHONE (949) 261-1920 FAX (949) 261-7451 WEB ADDRESS: www.pasternack.com E-MAIL ADDRESS: sales@pasternack.com COAXIAL & FIBER OPTICS ESTABLISHED 1972	DWG TITLE	PE8727	REV. -	FSCM NO.	53919	CAD FILE	042712	SCALE N/A	SIZE A	2233
	1	2	3	4	5	6	7	8	9	10