

2x Active Frequency Multiplier, 18 GHz to 29 GHz Output Frequency, 12.0 dB Conversion Gain, 2.92mm Output

Frequency Multipliers Technical Data Sheet

PE88X2027

Features

- 2x Active Frequency Multiplier
- 9 GHz to 14.5 GHz Input Frequency
- 18 GHz to 29 GHz Output Frequency
- Conversion Gain 12 dB typ
- Fundamental Isolation 20 dB typ
- RF Input Drive Level +3 dBm
- Max RF Input Power +13 dBm
- DC Bias +12Vdc @ 95 mA
- SMA Female Input and 2.92mm Female Output Connectors
- -40°C to +85°C Operating Temperature
- RoHS & REACH Compliant
- 50 Ohm Design
- Rugged Design meets MIL-STD-202 Test Conditions

Applications

- Aerospace & Defense
- Test & Measurement
- Microwave Radio Systems
- Military & Commercial Communication Systems
- Research & Development
- SATCOM
- Wireless Communications

Description


The PE88X2027 is an active Frequency Multiplier (2x) module that covers a broad output frequency bandwidth from 18 GHz to 29 GHz. Typical performance includes 12 dB conversion gain, 20 dB fundamental Isolation, with an RF input drive level of +3 dBm. DC bias is +12Vdc with 95 mA DC current. Maximum RF input power is +13 dBm with an operational temperature range of -40°C to +85°C. The rugged and compact package assembly supports an input SMA female connector and output 2.92mm female connector. And for highly reliable operation, the model is designed to meet a variety of MIL-STD-202 test conditions including shock, vibration, altitude, and humidity.

Electrical Specifications (TA= 25°C, VDC1 = 12 Vdc, IDC1 = 95 mA)

Description	Minimum	Typical	Maximum	Units
Input Frequency Range	9		14.5	GHz
Output Frequency Range	18		29	GHz
Impedance		50		Ohms
Input Power (CW)	+0	+3	+6	dBm
Output Power (Fin=12GHz/Fout=24GHz)	+10	+14		dBm
Conversion Gain (Pin = +3 dBm)	8	12		dB
Fundamental Isolation (F0)*(Fin=12GHz/Fout=36GHz)	15	20		dB
3F0 Isolation*(Fin=12GHz/Fout=36GHz)	15	20		dB
Phase Noise @100kHz Offset		-132		dBc/Hz
Input VSWR(Fin=12GHz)		1.5:1	2:1	
Output VSWR(Fout=24GHz)		2.2:1	2.7:1	
Operating DC Voltage 1	9	12	15	V
Operating DC Current 1		95	110	mA

*Isolation with respect to desired frequency output power level at 24GHz

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2x Active Frequency Multiplier, 18 GHz to 29 GHz Output Frequency, 12.0 dB Conversion Gain, SMA PE88X2027](#)



2x Active Frequency Multiplier, 18 GHz to 29 GHz Output
Frequency, 12.0 dB Conversion Gain, 2.92mm Output

Frequency Multipliers Technical Data Sheet

PE88X2027

Mechanical Specifications

Size

Length	1.25 in [31.75 mm]
Width	1.25 in [31.75 mm]
Height	0.563 in [14.3 mm]
Weight	0.085 lbs [38.56 g]
Package Type	Drop-In
Input Connector	SMA Female
Output Connector	2.92mm Female

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Storage Range	-55 to +105 deg C

Humidity

Shock

Vibration

Altitude

MIL-STD-202, Method 103B, Condition B
MIL-STD-202F, Method 213B, Condition B
MIL-STD-202F, Method 204D, Condition B
MIL-STD-202F, Method 105C, Condition B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


Absolute Maximum Rating

Parameter	Absolute Maximum
RF Input Power	+13dBm
DC Supply Voltage	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2x Active Frequency Multiplier, 18 GHz to 29 GHz Output Frequency, 12.0 dB Conversion Gain, SMA PE88X2027](#)




2x Active Frequency Multiplier, 18 GHz to 29 GHz Output
Frequency, 12.0 dB Conversion Gain, 2.92mm Output


Frequency Multipliers Technical Data Sheet

PE88X2027

Typical Performance Data

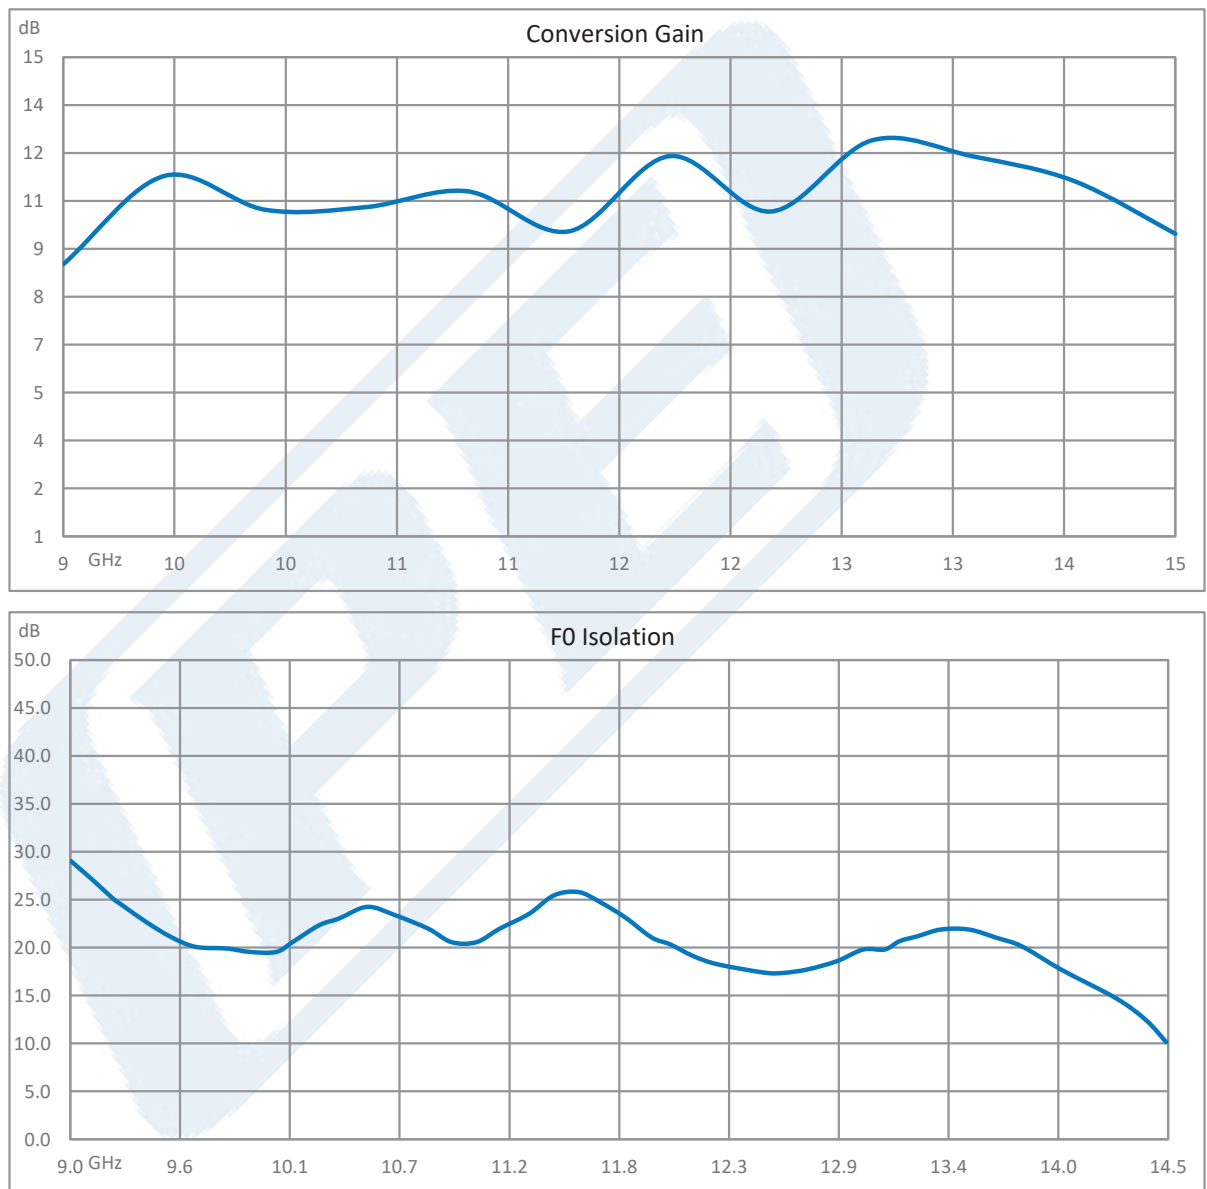


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2x Active Frequency Multiplier, 18 GHz to 29 GHz Output Frequency, 12.0 dB Conversion Gain, SMA PE88X2027](#)




2x Active Frequency Multiplier, 18 GHz to 29 GHz Output
Frequency, 12.0 dB Conversion Gain, 2.92mm Output

Frequency Multipliers Technical Data Sheet

PE88X2027

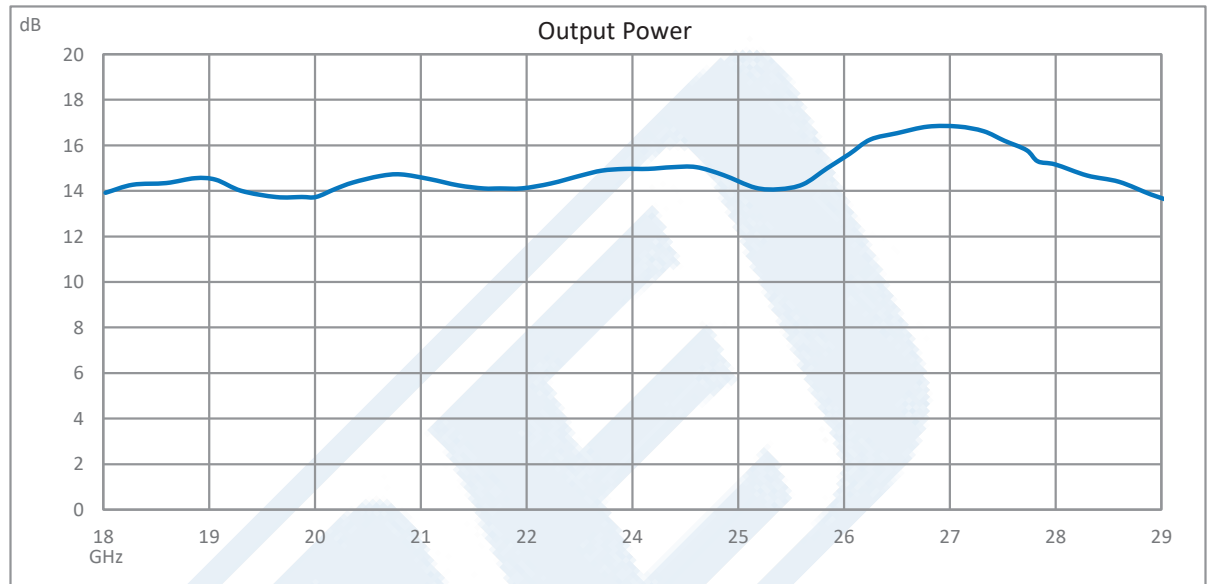


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2x Active Frequency Multiplier, 18 GHz to 29 GHz Output Frequency, 12.0 dB Conversion Gain, SMA PE88X2027](#)




2x Active Frequency Multiplier, 18 GHz to 29 GHz Output
Frequency, 12.0 dB Conversion Gain, 2.92mm Output

Frequency Multipliers Technical Data Sheet


PE88X2027

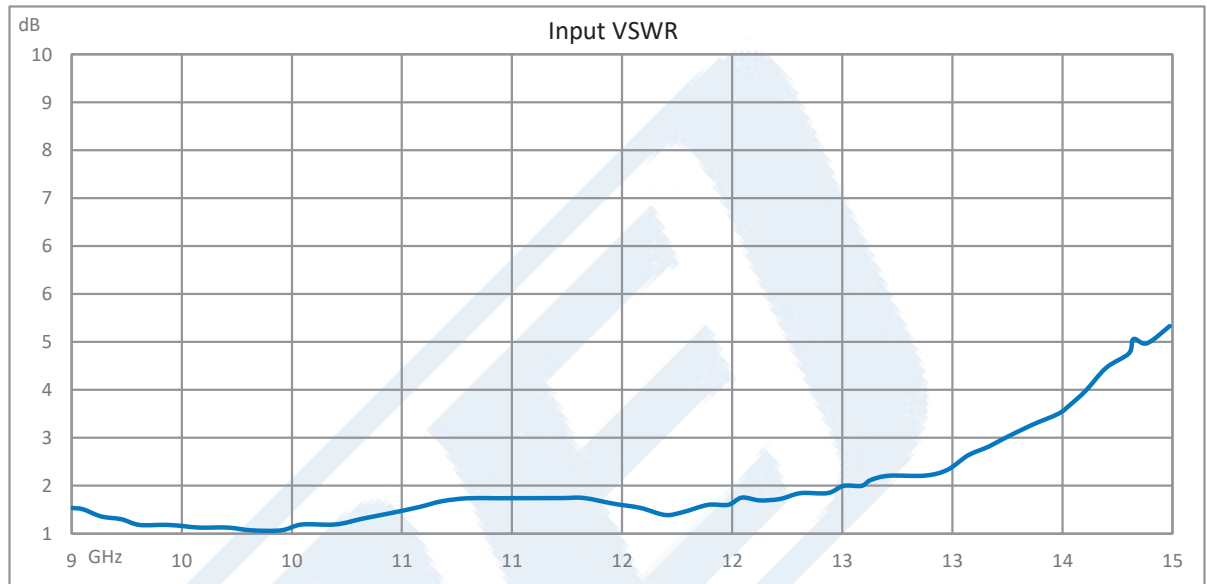

2x Active Frequency Multiplier, 18 GHz to 29 GHz Output Frequency, 12.0 dB Conversion Gain, 2.92mm Output from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

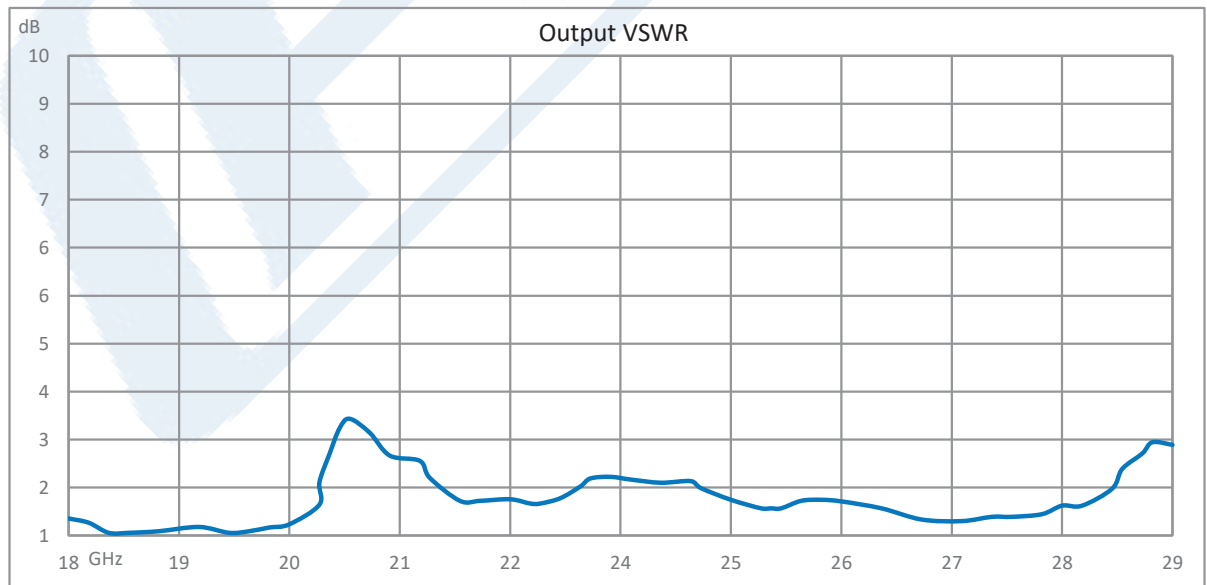

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2x Active Frequency Multiplier, 18 GHz to 29 GHz Output Frequency, 12.0 dB Conversion Gain, SMA PE88X2027](#)



2x Active Frequency Multiplier, 18 GHz to 29 GHz Output
Frequency, 12.0 dB Conversion Gain, 2.92mm Output

Frequency Multipliers Technical Data Sheet

PE88X2027

2x Active Frequency Multiplier, 18 GHz to 29 GHz Output Frequency, 12.0 dB Conversion Gain, 2.92mm Output from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2x Active Frequency Multiplier, 18 GHz to 29 GHz Output Frequency, 12.0 dB Conversion Gain, SMA PE88X2027](#)





URL: <https://www.pasternack.com/active-2x-frequency-multiplier-29-ghz-10-dbm-2.92mm-pe88x2027-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE88X2027 CAD Drawing

2x Active Frequency Multiplier, 18 GHz to 29 GHz Output

Frequency, 12.0 dB Conversion Gain, 2.92mm Output

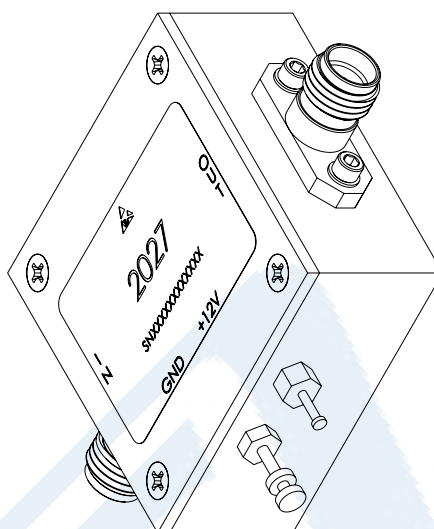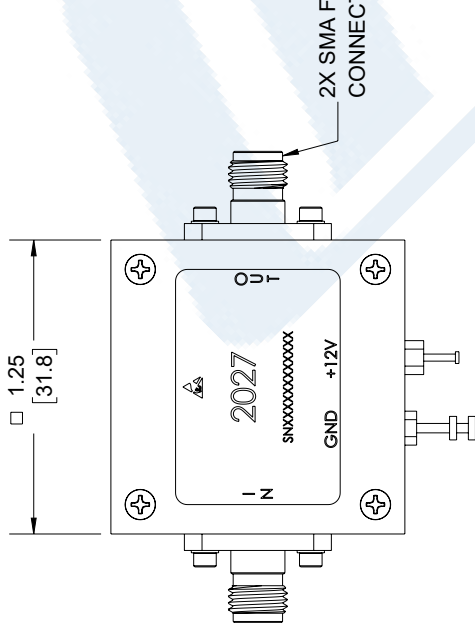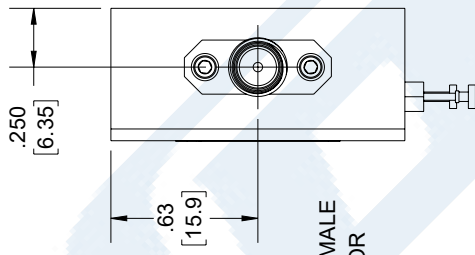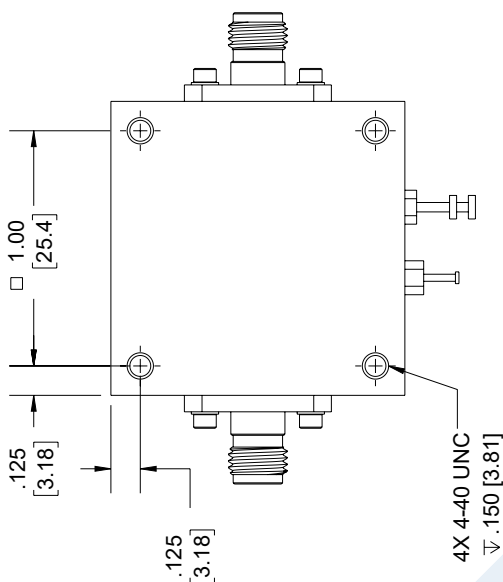

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
.X = ±.2 [5] FRACTIONS
.XX = ±.02 [0.5] ± 1/32
.XXX = ±.005 [0.13] ANGLES ± 1°
CABLE LENGTH TOLERANCES:
≤ 12 [305] = ±.1 [25] / -0
> 12 [305] ≤ 20 [508] = ±.05 [1.27] / -0
> 20 [508] ≤ 30 [762] = ±.1 [2.54] / -0
> 30 [762] ≤ 60 [1524] = ±.2 [5.08] / -0
> 60 [1524] ≤ 120 [3048] = ±.4 [10.16] / -0
> 120 [3048] ≤ 300 [7620] = ±.6 [15.24] / -0
> 300 [7620] = ±.5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE
UNLESS OTHERWISE SPECIFIED
DIMENSIONS MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

PE PASTERNAK
an INFINITIB® brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

2X ACTIVE FREQUENCY MULTIPLIER, 18 GHz TO 29 GHz
OUTPUT FREQUENCY, 12.0 dB CONVERSION GAIN, SMA

SCALE NONE SHEET 1 OF 1
INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

REV A

ITEM NO. PE88X2027

SIZE A

CAGE CODE 53919

DRAWN BY SREITER

1