

TNC Male to N Female Bulkhead Low Loss Cable Using LMR-240 Coax with Double HeatShrink



RF Cable Assemblies Technical Data Sheet


PE3C0108/HS2

Configuration

- Connector 1: TNC Male
- Connector 2: N Female Bulkhead
- Cable Type: LMR-240

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

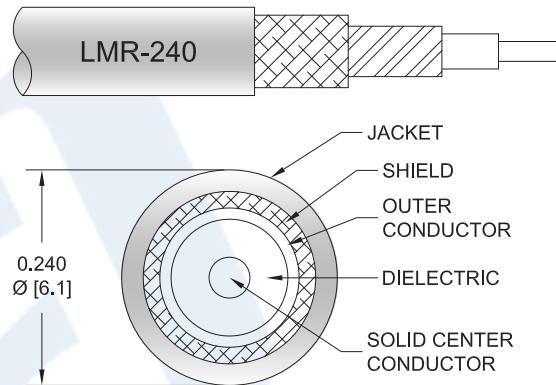

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C0108/HS2 TNC male to type N female bulkhead cable using LMR-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to type N cable assembly has a male to female gender configuration with 50 ohm flexible LMR-240 coax. The PE3C0108/HS2 TNC male to type N female cable assembly operates to 5.8 GHz. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Female Bulkhead Low Loss Cable Using LMR-240 Coax with Double Heat-Shrink PE3C0108/HS2](#)

TNC Male to N Female Bulkhead Low Loss Cable Using LMR-240 Coax with Double HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3C0108/HS2

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		3.2 [10.5]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ω/1000ft [Ω/Km]
Operating Voltage (AC)			500	Vrms
Jacket Spark			5,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.039	0.055	0.079	0.129	0.204	dB/ft
	0.13	0.18	0.26	0.42	0.67	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Weight	0.154 lbs [69.85 g]
--------	---------------------

Cable

Cable Type	LMR-240
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.24 in [6.1 mm]

One Time Minimum Bend Radius	0.75 in [19.05 mm]
------------------------------	--------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Female Bulkhead Low Loss Cable Using LMR-240 Coax with Double Heat-Shrink PE3C0108/HS2](#)

TNC Male to N Female Bulkhead Low Loss Cable Using LMR-240 Coax with Double HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3C0108/HS2

Repeated Minimum Bend Radius
Bending Moment
Flat Plate Crush
Tensile Strength

2.5 in [63.5 mm]
0.25 lbs-ft [0.34 N-m]
20 lbs/in [0.36 Kg/mm]
80 lbs [36.29 Kg]

Connectors

Description	Connector 1	Connector 2
Type	TNC Male	N Female Bulkhead
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Mating Cycles		500
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification		30 μ m minimum
Dielectric Type	POM	PTFE
Body Material and Plating	Brass, Nickel	Brass, Tri-Metal

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Female Bulkhead Low Loss Cable Using LMR-240 Coax with Double Heat-Shrink PE3C0108/HS2](#)

TNC Male to N Female Bulkhead Low Loss Cable
Using LMR-240 Coax with Double HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3C0108/HS2

How to Order

Part Number Configuration:

PE3C0108/HS2

- **xx** **uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C0108/HS2-12 = 12 inches long cable
 PE3C0108/HS2-100cm = 100 cm long cable

TNC Male to N Female Bulkhead Low Loss Cable Using LMR-240 Coax with Double HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Female Bulkhead Low Loss Cable Using LMR-240 Coax with Double HeatShrink PE3C0108/HS2](#)

URL: <https://www.pasternack.com/tnc-male-to-n-female-bulkhead-low-loss-cable-using-lmr-240-with-double-heatshrink-pe3c0108-hs2-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C0108/HS2 CAD Drawing
 TNC Male to N Female Bulkhead Low Loss Cable Using
 LMR-240 Coax with Double HeatShrink

