

SMA Male Right Angle to BNC Male Cable Using RG316-DS Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet



PE3C3331/HS

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: BNC Male
- Cable Type: RG316-DS

Features

- Max Frequency 3 GHz
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

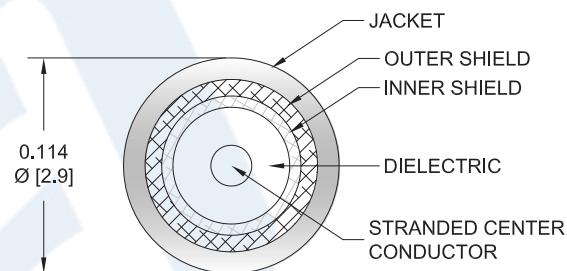

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C3331/HS SMA male right angle to BNC male cable using RG316-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to BNC cable assembly has a male to male gender configuration with 50 ohm flexible RG316-DS coax. The PE3C3331/HS SMA male to BNC male cable assembly operates to 3 GHz. The right angle SMA interface on the RG316-DS cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to BNC Male Cable Using RG316-DS Coax with HeatShrink PE3C3331/HS](#)

SMA Male Right Angle to BNC Male Cable Using RG316-DS Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3C3331/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			335	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.109	0.159	0.237	0.379	0.579	dB/ft
	0.36	0.52	0.78	1.24	1.9	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Weight 0.059 lbs [26.76 g]

Cable

Cable Type RG316-DS
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 2
Shield Layer 1 Silver Plated Copper Braid
Shield Layer 2 Silver Plated Copper Braid
Jacket Material FEP, Tan
Jacket Diameter 0.114 in [2.9 mm]

Repeated Minimum Bend Radius 0.6 in [15.24 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to BNC Male Cable Using RG316-DS Coax with HeatShrink PE3C3331/HS](#)



SMA Male Right Angle to BNC Male Cable Using RG316-DS Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3C3331/HS

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	BNC Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 μ in minimum	50 μ in. minimum
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 μ in minimum	100 μ in. minimum
Hex Size	5/16 inch	
Torque	3 in-lbs [0.34 Nm]	

Environmental Specifications

Temperature

Operating Range

-55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to BNC Male Cable Using RG316-DS Coax with HeatShrink PE3C3331/HS](#)

SMA Male Right Angle to BNC Male Cable Using RG316-DS Coax with HeatShrink




RF Cable Assemblies Technical Data Sheet

PE3C3331/HS

How to Order

Part Number Configuration:

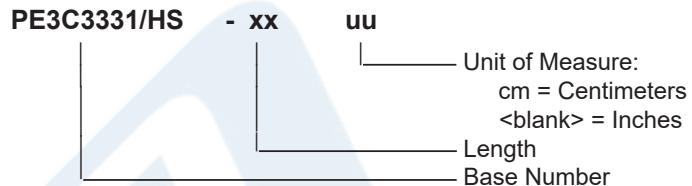

Example: PE3C3331/HS-12 = 12 inches long cable
PE3C3331/HS-100cm = 100 cm long cable

SMA Male Right Angle to BNC Male Cable Using RG316-DS Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to BNC Male Cable Using RG316-DS Coax with HeatShrink PE3C3331/HS](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-bnc-male-cable-using-rg316-ds-with-heatshrink-pe3c3331-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C3331/HS CAD Drawing

SMA Male Right Angle to BNC Male Cable Using RG316-DS Coax with HeatShrink

