

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable Using RG316 Coax





PE3C3584

Configuration

- Connector 1: Push-On SMP Female Right Angle
- Connector 2: Push-On SMP Female Right Angle
- Cable Type: RG316
- Coax Flex Type: Flexible

Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

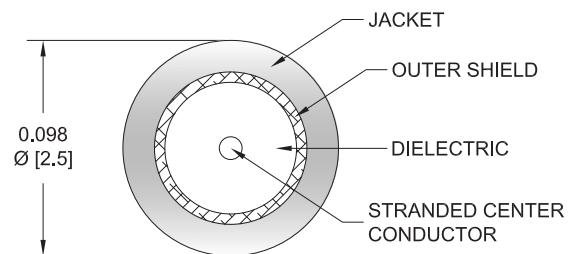

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C3584 SMP female push-on right angle to SMP female push-on right angle cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMP to SMP cable assembly has a female to female gender configuration with 50 ohm flexible RG316 coax. The PE3C3584 SMP female to SMP female cable assembly operates to 3 GHz. The right angle SMP interfaces on the RG316 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation	69			%
Capacitance	29.4 [96.46]			pF/ft [pF/m]
DC Resistance Inner Conductor	8.41 [27.59]			Ohms/1000ft [Ohms/Km]
Operating Voltage (AC)		350		Vrms
Jacket Spark		2,000		Vrms

Specifications by Frequency

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable Using RG316 Coax



PE3C3584

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	100	250	500	1000	3000	MHz	
PE3C3584	Custom Lengths Available	Insertion Loss (Typ.)	0.11	0.16	0.24	0.38	0.58	dB/ft	
			0.37	0.53	0.79	1.25	1.91	dB/m	
PE3C3584-12	12 inch	Insertion Loss (Typ.)	0.31	0.36	0.44	0.58	0.78	dB	0.025
PE3C3584-24	24 inch	Insertion Loss (Typ.)	0.42	0.52	0.68	0.96	1.36	dB	0.036
PE3C3584-36	36 inch	Insertion Loss (Typ.)	0.53	0.68	0.92	1.34	1.94	dB	0.046
PE3C3584-48	48 inch	Insertion Loss (Typ.)	0.64	0.84	1.16	1.72	2.52	dB	0.056
PE3C3584-72	72 inch	Insertion Loss (Typ.)	0.86	1.16	1.63	2.48	3.68	dB	0.076

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB

Loss due to Connector 2: 0.1 dB

Base Weight: 0.025 pounds

Additional Weight per Inch: 0.00084 pounds

Mechanical Specifications

Cable Assembly

Weight 0.025 lbs [11.34 g]

Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.102 in [2.59 mm]

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable Using RG316 Coax



PE3C3584

Connectors

Description	Connector 1	Connector 2
Type	SMP Female Right Angle	SMP Female Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Connection Method	Push-On	Push-On
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	30µ in. minimum	30µ in. minimum
Dielectric Type	Teflon	Teflon
Outer Conductor Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Outer Conductor Plating Specification	3µ in. minimum	3µ in. minimum
Body Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Body Plating Specification	3µ in. minimum	3µ in. minimum

Environmental Specifications

Operating Range Temperature -55 to +165 deg C

Compliance Certifications

(see product page for current document)

Plotted and Other Data

Notes:

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable Using RG316 Coax




PE3C3584

Typical Performance Data

How to Order

Part Number Configuration:

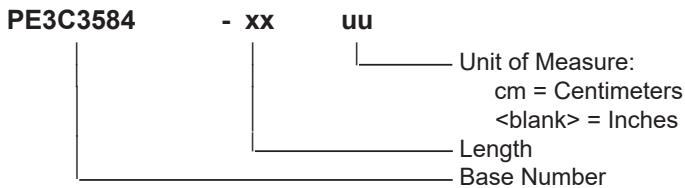

Example: PE3C3584-12 = 12 inches long cable
PE3C3584-100cm = 100 cm long cable

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable Using RG316 Coax PE3C3584](#)

URL: <https://www.pasternack.com/push-on-smp-female-right-angle-to-push-on-smp-female-cable-using-rg316-pe3c3584-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C3584 CAD Drawing

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable Using RG316 Coax

