



1.85mm Male to 2.92mm Male Cable Using PE-P086HF Coax

TECHNICAL DATA SHEET



PE3C5721

Configuration

- Connector 1: 1.85mm Male
- Connector 2: 2.92mm Male
- Cable Type: PE-P086HF
- Coax Flex Type: Flexible

Features

- 70% Phase Velocity
- Double Shielded
- FEP Jacket

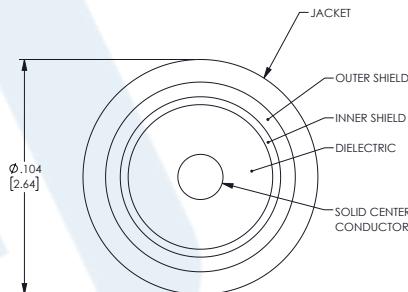

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C5721 1.85mm male to 2.92mm male cable using PE-P086HF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 1.85mm to 2.92mm cable assembly has a male to male gender configuration with 50 ohm flexible PE-P086HF coax. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Weight	0.045 lbs [20.41 g]
--------	---------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Male to 2.92mm Male Cable Using PE-P086HF Coax PE3C5721](#)



1.85mm Male to 2.92mm Male Cable Using PE-P086HF Coax

TECHNICAL DATA SHEET
PE3C5721
Cable

Cable Type	PE-P086HF
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Tape
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Blue
Jacket Diameter	0.104 in [2.64 mm]

One Time Minimum Bend Radius

0.52 in [13.21 mm]

Connectors

Description	Connector 1	Connector 2
Type	1.85mm Male Threaded	2.92mm Male Threaded
Impedance	50 Ohms	50 Ohms
Mating Cycles		500
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Beryllium Copper, Gold over Nickel
Contact Plating Specification	50 μ in minimum	50 μ in minimum
Dielectric Type	PPE	PCTFE
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Hex Size	5/16 inch	5/16 inch
Torque		8 in-lbs [0.9 Nm]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Male to 2.92mm Male Cable Using PE-P086HF Coax PE3C5721](#)



1.85mm Male to 2.92mm Male Cable Using PE-P086HF Coax

TECHNICAL DATA SHEET

PE3C5721

How to Order

Part Number Configuration:

PE3C5721

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C5721-12 = 12 inches long cable
PE3C5721-100cm = 100 cm long cable

1.85mm Male to 2.92mm Male Cable Using PE-P086HF Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Male to 2.92mm Male Cable Using PE-P086HF Coax PE3C5721](#)

URL: <https://www.pasternack.com/1.85mm-male-to-2.92mm-male-cable-using-pe-p086hf-pe3c5721-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

