



## 2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-402 Coax Using Times Microwave Components

### RF Cable Assemblies Technical Data Sheet

PE3C8384

#### Configuration

- Connector 1: 2.2-5 Male
- Connector 2: N Female Bulkhead
- Cable Type: TFT-402

#### Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > -80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket

#### Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Indoor and Outdoor Use
- Plenum Rated Applications

#### Description

Pasternack's PE3C8384 2.2-5 male to type N female bulkhead cable using TFT-402 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 2.2-5 to type N cable assembly has a male to female gender configuration with 50 ohm flexible TFT-402 coax. The PE3C8384 2.2-5 male to type N female cable assembly operates to 5.8 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than -80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	-80			dB
Passive Intermodulation			-160	dBc

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-402 Coax Using Times Microwave Components PE3C8384](#)



## 2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-402 Coax Using Times Microwave Components

### RF Cable Assemblies Technical Data Sheet

**PE3C8384**

Capacitance	26.7 [87.6]	pF/ft [pF/m]
DC Resistance Inner Conductor	8.5 [27.89]	Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor	5.6 [18.37]	Ω/1000ft [Ω/Km]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.052 0.17	0.076 0.25	0.108 0.35	0.173 0.57	0.267 0.88	dB/ft dB/m

#### Electrical Specification Notes:

Insertion Loss does not include the losses of the connectors. Insertion Loss is estimated as  $0.1 * \text{SQRT}(F\text{GHz})$  dB for the male connector and 0.1 dB for the female connector.

#### Mechanical Specifications

##### Cable Assembly

Diameter 0.748 in [19 mm]

##### Cable

Cable Type TFT-402  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type PTFE  
 Number of Shields 2  
 Shield Layer 1 Silver Plated Copper Braid  
 Shield Layer 2 Tinned Copper Braid  
 Jacket Material FEP, Blue  
 Jacket Diameter 0.16 in [4.06 mm]

One Time Minimum Bend Radius

0.75 in [19.05 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-402 Coax Using Times Microwave Components PE3C8384](#)



## 2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-402 Coax Using Times Microwave Components

### RF Cable Assemblies Technical Data Sheet

PE3C8384

#### Connectors

Description	Connector 1	Connector 2
Type	2.2-5 Male	N Female Bulkhead
Impedance	50 Ohms	50 Ohms
Mating Cycles	100	
Contact Material and Plating	Beryllium Copper, Silver	Brass, Silver
Contact Plating Specification	200 $\mu$ m	5 $\mu$ m
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Tri-Metal
Outer Conductor Plating Specification		3 $\mu$ m
Body Material and Plating	Brass, Silver	Brass, Tri-Metal
Body Plating Specification	100 $\mu$ m	3 $\mu$ m
Coupling Nut Material and Plating	Brass, Tri-Metal	
Coupling Nut Plating Specification	100 $\mu$ m	
Torque	26 in-lbs [2.94 Nm]	10 in-lbs [1.13 Nm]

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +125 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-402 Coax Using Times Microwave Components PE3C8384](#)

## 2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-402 Coax Using Times Microwave Components



### RF Cable Assemblies Technical Data Sheet

PE3C8384

#### How to Order

Part Number Configuration:

PE3C8384

- xx uu

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C8384-12 = 12 inches long cable  
PE3C8384-100cm = 100 cm long cable

2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-402 Coax Using Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-402 Coax Using Times Microwave Components PE3C8384](#)


URL: <https://www.pasternack.com/2.2-5-male-n-female-tft-402-cable-assembly-pe3c8384-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C8384 CAD Drawing

2.2-5 Male to N Female Bulkhead Low PIM Cable Using  
TFT-402 Coax Using Times Microwave Components

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/12/2021	SRAUTUS

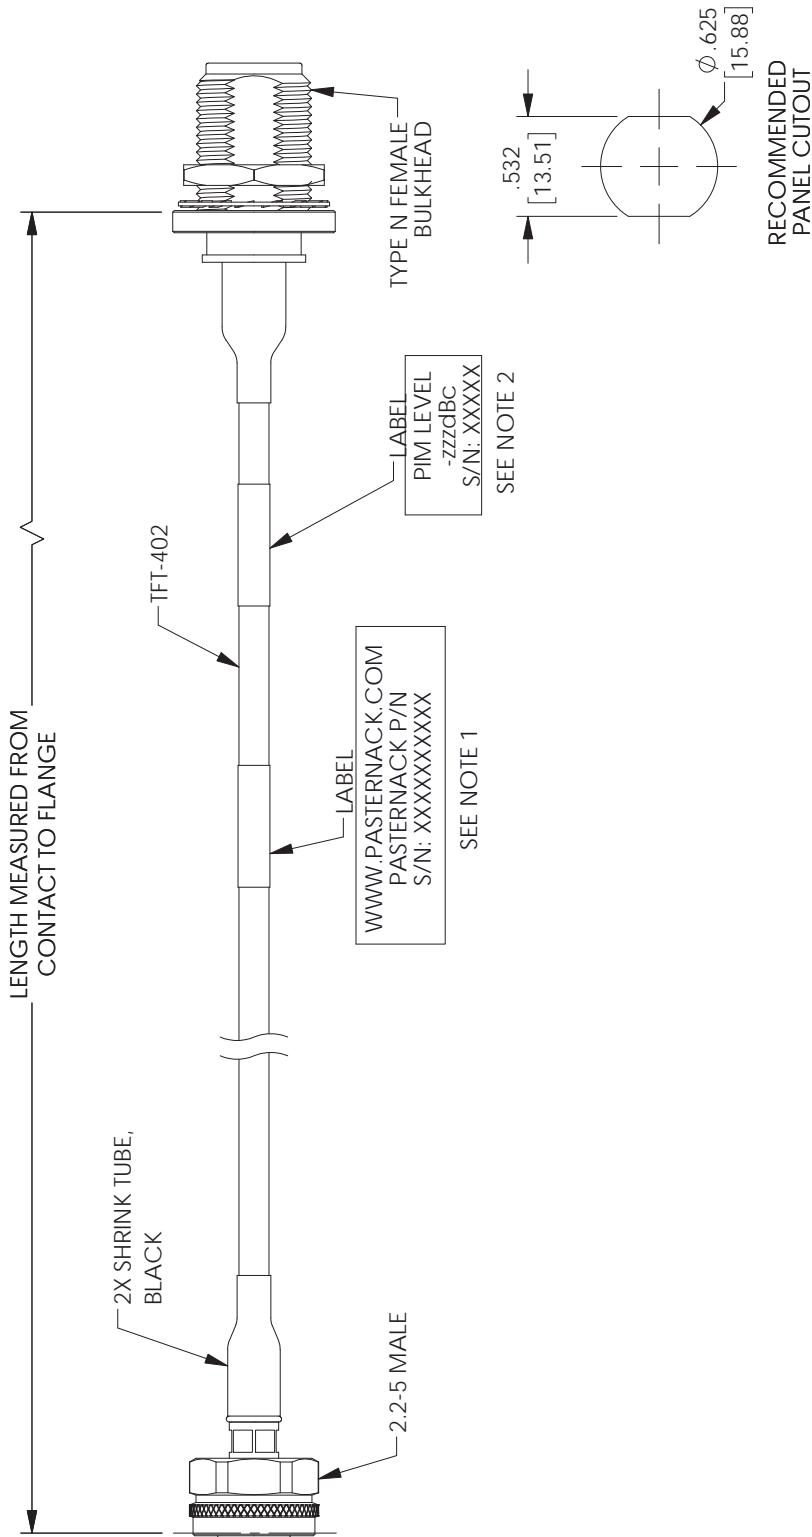

NOTES:

1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED.  
CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END,  
12" FROM THE FRONT OF THE CONNECTOR.
2. PIM LABEL LOCATED 6" FROM CABLE END, 1 PLACE FOR  
ALL LENGTHS OF CABLE.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE  
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

THIRD-ANGLE PROJECTION	
	an INFINITI® brand
THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNACK CORPORATION. ALL RIGHTS RESERVED.	
SHEET 1 OF 1	
SCALE	N/A
SIZE	ITEM NO. PE3C8384
CAGE CODE	REV A
DRAWN BY DFRISIELLO	
A	53919

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS
TOLERANCES:
$X = \pm .2$ [5.08]      FRACTIONS $XX = \pm .02$ [.51] $\pm .032$ $XXX = \pm .005$ [.13]      ANGLES $\pm 1^\circ$
CABLE LENGTH(L) TOLERANCES:
$L \leq 12$ [305] = $\pm 1$ [25] / -0 12 [305] < $L \leq 60$ [1524] = $\pm 2$ [51] / -0 60 [1524] < $L \leq 120$ [3048] = $\pm 4$ [102] / -0 120 [3048] < $L \leq 300$ [7620] = $\pm 6$ [152] / -0 300 [7620] < $L = \pm 5\%$ / -0
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.