



## SMA Male to SMA Male Low Loss Cable Using LMR-195-UF Coax With Times Microwave Components

### RF Cable Assemblies Technical Data Sheet

**PE3C8633**

#### Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male
- Cable Type: LMR-195-UF

#### Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 74% Phase Velocity
- Double Shielded
- TPE Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C8633 SMA male to SMA male 12 inch cable using LMR-195-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-195-UF coax. The PE3C8633 SMA male to SMA male cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Low Loss Cable Using LMR-195-UF Coax With Times Microwave Components PE3C8633](#)



## SMA Male to SMA Male Low Loss Cable Using LMR-195-UF Coax With Times Microwave Components

### RF Cable Assemblies Technical Data Sheet

**PE3C8633**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		74		%
RF Shielding	90			dB
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		9.5 [31.17]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		4.9 [16.08]		Ω/1000ft [Ω/Km]
Jacket Spark			3,000	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.067	0.097	0.096	0.132	0.356	dB/ft

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

#### Mechanical Specifications

##### Cable Assembly

Weight 0.059 lbs [26.76 g]

##### Cable

Cable Type LMR-195-UF  
Impedance 50 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper  
Dielectric Type Foam PE  
Number of Shields 2  
Shield Layer 1 Aluminum Tape  
Shield Layer 2 Tinned Copper  
Jacket Material TPE, Black  
Jacket Diameter 0.195 in [4.95 mm]

One Time Minimum Bend Radius 0.5 in [12.7 mm]  
Repeated Minimum Bend Radius 2 in [50.8 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Low Loss Cable Using LMR-195-UF Coax With Times Microwave Components PE3C8633](#)



## SMA Male to SMA Male Low Loss Cable Using LMR-195-UF Coax With Times Microwave Components

### RF Cable Assemblies Technical Data Sheet

**PE3C8633**

Bending Moment  
Flat Plate Crush  
Tensile Strength

0.1 lbs-ft [0.14 N-m]  
10 lbs/in [0.18 Kg/mm]  
40 lbs [18.14 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	ASTM B488	ASTM B488
Dielectric Type	Teflon	Teflon
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Hex Size	5/16 Inch	5/16 Inch

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +85 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Low Loss Cable Using LMR-195-UF Coax With Times Microwave Components PE3C8633](#)



## SMA Male to SMA Male Low Loss Cable Using LMR-195-UF Coax With Times Microwave Components

### RF Cable Assemblies Technical Data Sheet

**PE3C8633**

#### How to Order

Part Number Configuration:

**PE3C8633**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C8633-12 = 12 inches long cable  
PE3C8633-100cm = 100 cm long cable

SMA Male to SMA Male Low Loss Cable Using LMR-195-UF Coax With Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Low Loss Cable Using LMR-195-UF Coax With Times Microwave Components PE3C8633](#)


URL: <https://www.pasternack.com/sma-male-to-sma-male-low-loss-cable-using-lmr-195-uf-pe3c8633-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C8633 CAD Drawing

## SMA Male to SMA Male Low Loss Cable Using LMR-195-UF Coax With Times Microwave Components

ZONE	REV.	DESCRIPTION	REVISION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE		12/16/2022	KDANG	AGANWANI

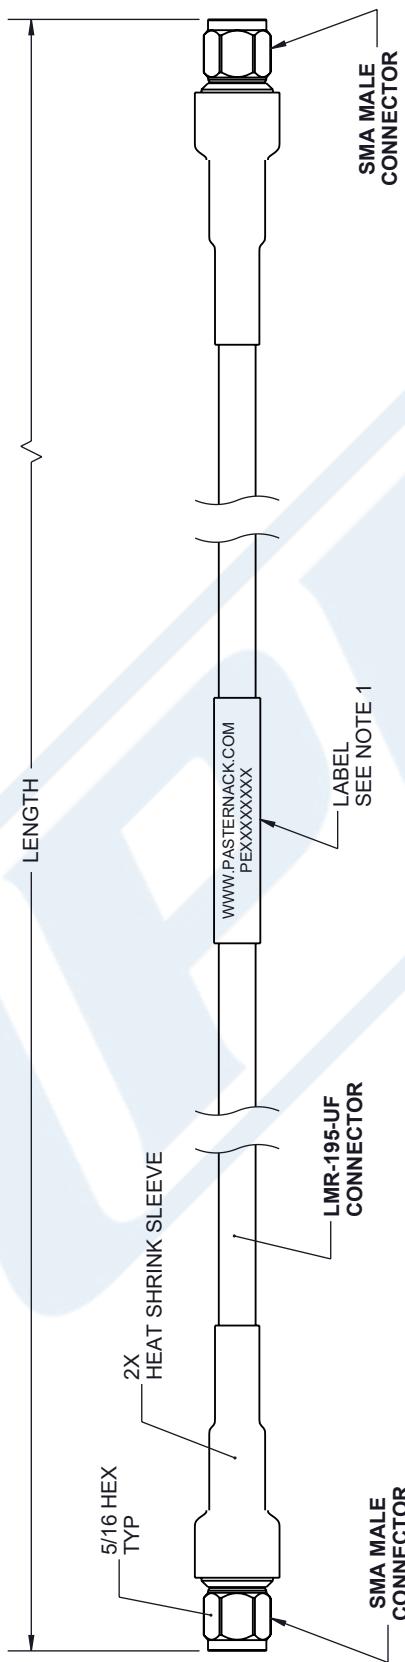

## NOTES:

1. CABLE ASSY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROX 6 INCHES FROM EACH CONNECTOR.  
CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY
- 2.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN WHOLE OR IN PART WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <p><math>X = \pm 0.2</math> [5]  <math>XX = \pm 0.02</math> [1.5]  <math>XXX = \pm 0.005</math> [1.3]</p> <p>FRACTIONS  <math>\frac{1}{132}</math>  <math>\frac{1}{3048}</math></p> <p>CABLE LENGTH TOLERANCES:</p>		<p><b>PASTERNACK®</b> an INFINITI® brand</p> <p></p> <p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE SHEET</p> <p>WEBSITE: <a href="http://www.Pasternack.com">www.Pasternack.com</a> PHONE: 1.866.727.8376   1.949.261.1920</p> <p>DESCRIPTION</p> <p><b>SMA Male to SMA Male Low Loss Cable Using LMR-195-UJ Coax With Times Microwave Components</b></p>		<p>REV A</p> <p>ITEM NO. PE3C8633</p>
A	53919	KDANG	DRAWN BY	ALL DIMENSIONS ARE INCHES AND SUBJECT TO CHANGE WITHOUT NOTICE