



SMA Male to N Male Right Angle Cable Using PE-SR402FL Coax

RF Cable Assemblies Technical Data Sheet


PE3W00507

Configuration

- Connector 1: SMA Male
- Connector 2: N Male Right Angle
- Cable Type: PE-SR402FL

Features

- Max Frequency 11 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity

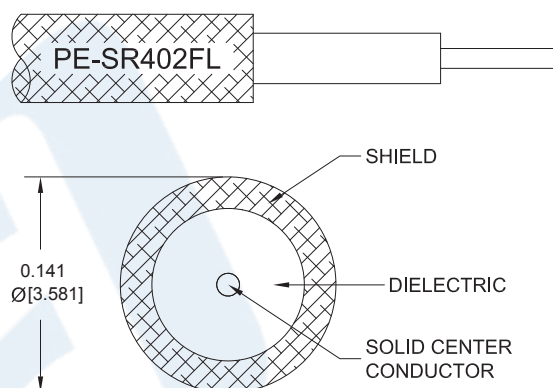

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W00507 SMA male to type N male right angle cable using PE-SR402FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to type N cable assembly has a male to male gender configuration with 50 ohm formable PE-SR402FL coax. The PE3W00507 SMA male to type N male cable assembly operates to 11 GHz. The right angle type N interface on the PE-SR402FL cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Male Right Angle Cable Using PE-SR402FL Coax PE3W00507](#)



SMA Male to N Male Right Angle Cable Using PE-SR402FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W00507

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	11	GHz
Insertion Loss (Max.)	0.08	0.12	0.18	0.29	0.48	dB/ft
	0.26	0.39	0.59	0.95	1.57	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.3dB connector loss.

Mechanical Specifications

Cable Assembly

Diameter 0.79 in [20.07 mm]

Weight 0.064 lbs [29.03 g]

Cable

Cable Type PE-SR402FL
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Shield Layer 1 Tinned Copper Braid

One Time Minimum Bend Radius 0.315 in [8 mm]

Repeated Minimum Bend Radius 1.57 in [39.88 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Male Right Angle Cable Using PE-SR402FL Coax PE3W00507](#)



SMA Male to N Male Right Angle Cable Using PE-SR402FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W00507

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	N Male Right Angle
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50µ in. minimum	
Dielectric Type	Teflon	PTFE
Body Material and Plating	Stainless Steel, Gold	Brass, Nickel
Body Plating Specification	10µ in. minimum	
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100µ in. minimum	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8$ ", whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Male Right Angle Cable Using PE-SR402FL Coax PE3W00507](#)




SMA Male to N Male Right Angle Cable Using PE-SR402FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W00507

Typical Performance Data

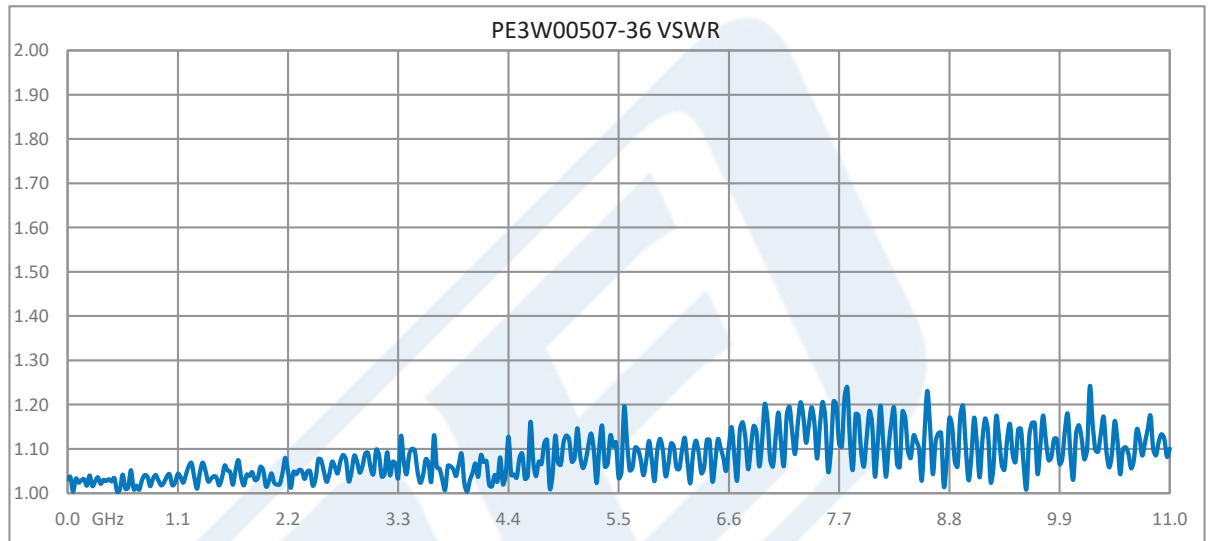

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Male Right Angle Cable Using PE-SR402FL Coax PE3W00507](#)



SMA Male to N Male Right Angle Cable Using PE-SR402FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W00507

How to Order

Part Number Configuration:

PE3W00507

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W00507-12 = 12 inches long cable
PE3W00507-100cm = 100 cm long cable

SMA Male to N Male Right Angle Cable Using PE-SR402FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Male Right Angle Cable Using PE-SR402FL Coax PE3W00507](https://www.pasternack.com/sma-male-n-male-pe-sr402fl-cable-assembly-pe3w00507-p.aspx)

URL: <https://www.pasternack.com/sma-male-n-male-pe-sr402fl-cable-assembly-pe3w00507-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W00507 CAD Drawing

SMA Male to N Male Right Angle Cable Using PE-SR402FL Coax

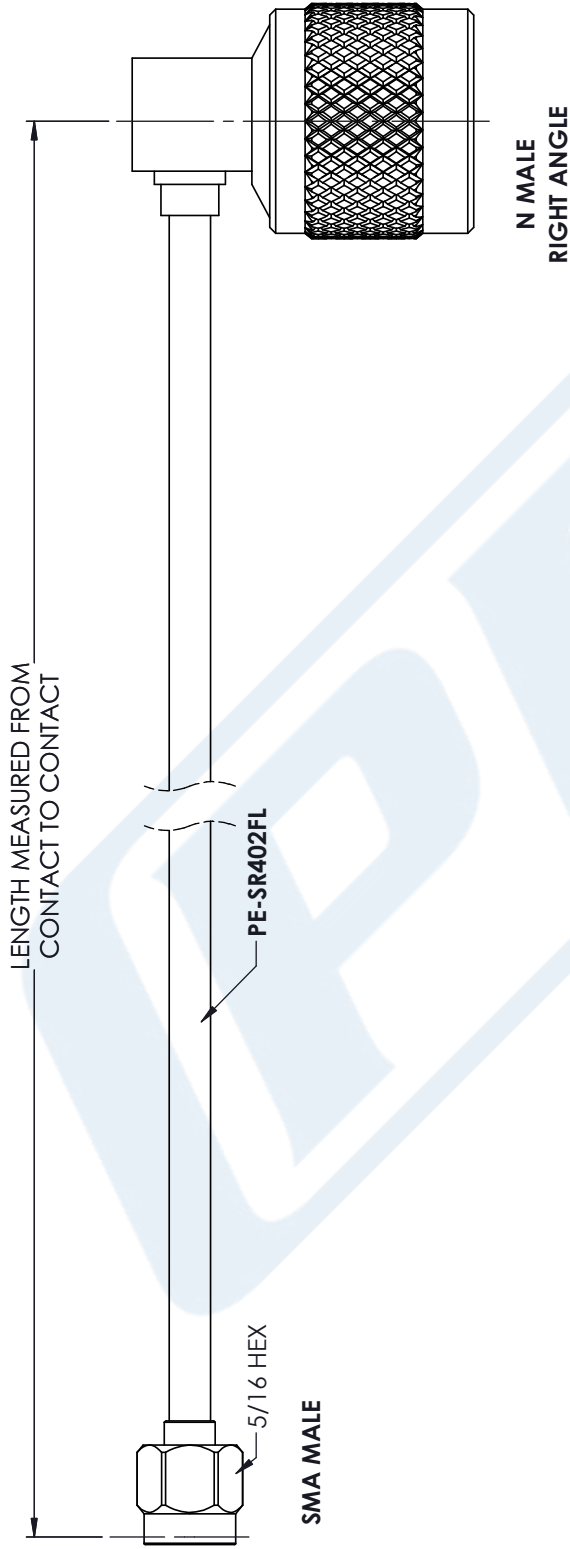

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

<p>NOTES:</p> <ol style="list-style-type: none"> 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. 	<p>DWG TITLE</p> <p style="text-align: center;">PE3W00507</p>	<p>CAD FILE</p> <p style="text-align: center;">10/23/18</p>	<p>SCALE</p> <p style="text-align: center;">N/A</p>	<p>SIZE A</p> <p style="text-align: center;">CN2379</p>
<p>PASTERNAK THE ENGINEER'S RF SOURCE</p> <p>Pasternack Enterprises, Inc. P.O. Box 16759 Irvine CA 92623</p> <p>Phone: (949) 261-1920 Fax: (949) 261-7451 Website: www.pasternack.com E-Mail: sales@pasternack.com</p>		<p>CAGE CODE 53919</p>	<p>LENGTH MEASURED FROM CONTACT TO CONTACT</p>	