



MCX Plug Right Angle to SMB Plug Right Angle Cable Using RG316-DS Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet


PE3W00718/HS

Configuration

- Connector 1: MCX Plug Right Angle
- Connector 2: SMB Plug Right Angle
- Cable Type: RG316-DS
- Coax Flex Type: Flexible

Features

- Shielding Effectivity > 85 dB
- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket

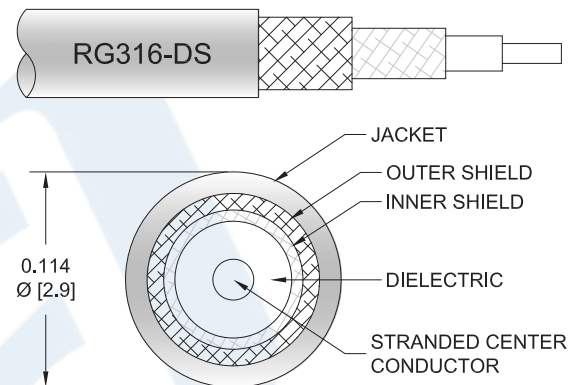

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W00718/HS MCX plug right angle to SMB plug right angle cable using RG316-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MCX to SMB cable assembly has a plug to plug gender configuration with 50 ohm flexible RG316-DS coax. The right angle MCX and right angle SMB interfaces on the RG316-DS cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 85 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		69.5		%
RF Shielding	85			dB
Capacitance		28.96 [95.01]		pF/ft [pF/m]
DC Resistance Inner Conductor		83.82 [275]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		5.33 [17.49]		Ω/1000ft [Ω/Km]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to SMB Plug Right Angle Cable Using RG316-DS Coax with HeatShrink PE3W00718/HS](#)



MCX Plug Right Angle to SMB Plug Right Angle Cable Using RG316-DS Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W00718/HS

Mechanical Specifications

Cable Assembly

Weight 0.034 lbs [15.42 g]

Cable

Cable Type RG316-DS
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 2
Shield Layer 1 Silver Plated Copper Braid
Shield Layer 2 Silver Plated Copper Braid
Jacket Material FEP, Tan
Jacket Diameter 0.114 in [2.9 mm]

One Time Minimum Bend Radius 0.59 in [14.99 mm]
Repeated Minimum Bend Radius 1.57 in [39.88 mm]

Connectors

Description	Connector 1	Connector 2
Type	MCX Plug Right Angle	SMB Plug Right Angle
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating		Beryllium Copper, Gold
Contact Plating Specification		30µ in. minimum
Dielectric Type		Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification		100µ in. minimum

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to SMB Plug Right Angle Cable Using RG316-DS Coax with HeatShrink PE3W00718/HS](#)



MCX Plug Right Angle to SMB Plug Right Angle Cable Using RG316-DS Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W00718/HS

How to Order

Part Number Configuration:

PE3W00718/HS

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W00718/HS-12 = 12 inches long cable
PE3W00718/HS-100cm = 100 cm long cable

MCX Plug Right Angle to SMB Plug Right Angle Cable Using RG316-DS Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to SMB Plug Right Angle Cable Using RG316-DS Coax with HeatShrink PE3W00718/HS](https://www.pasternack.com/mcx-plug-right-angle-to-smb-plug-right-angle-cable-using-rg316-ds-with-heatshrink-pe3w00718-hs-p.aspx)

URL: <https://www.pasternack.com/mcx-plug-right-angle-to-smb-plug-right-angle-cable-using-rg316-ds-with-heatshrink-pe3w00718-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W00718/HS CAD Drawing

MCX Plug Right Angle to SMB Plug Right Angle Cable
Using RG316-DS Coax with HeatShrink

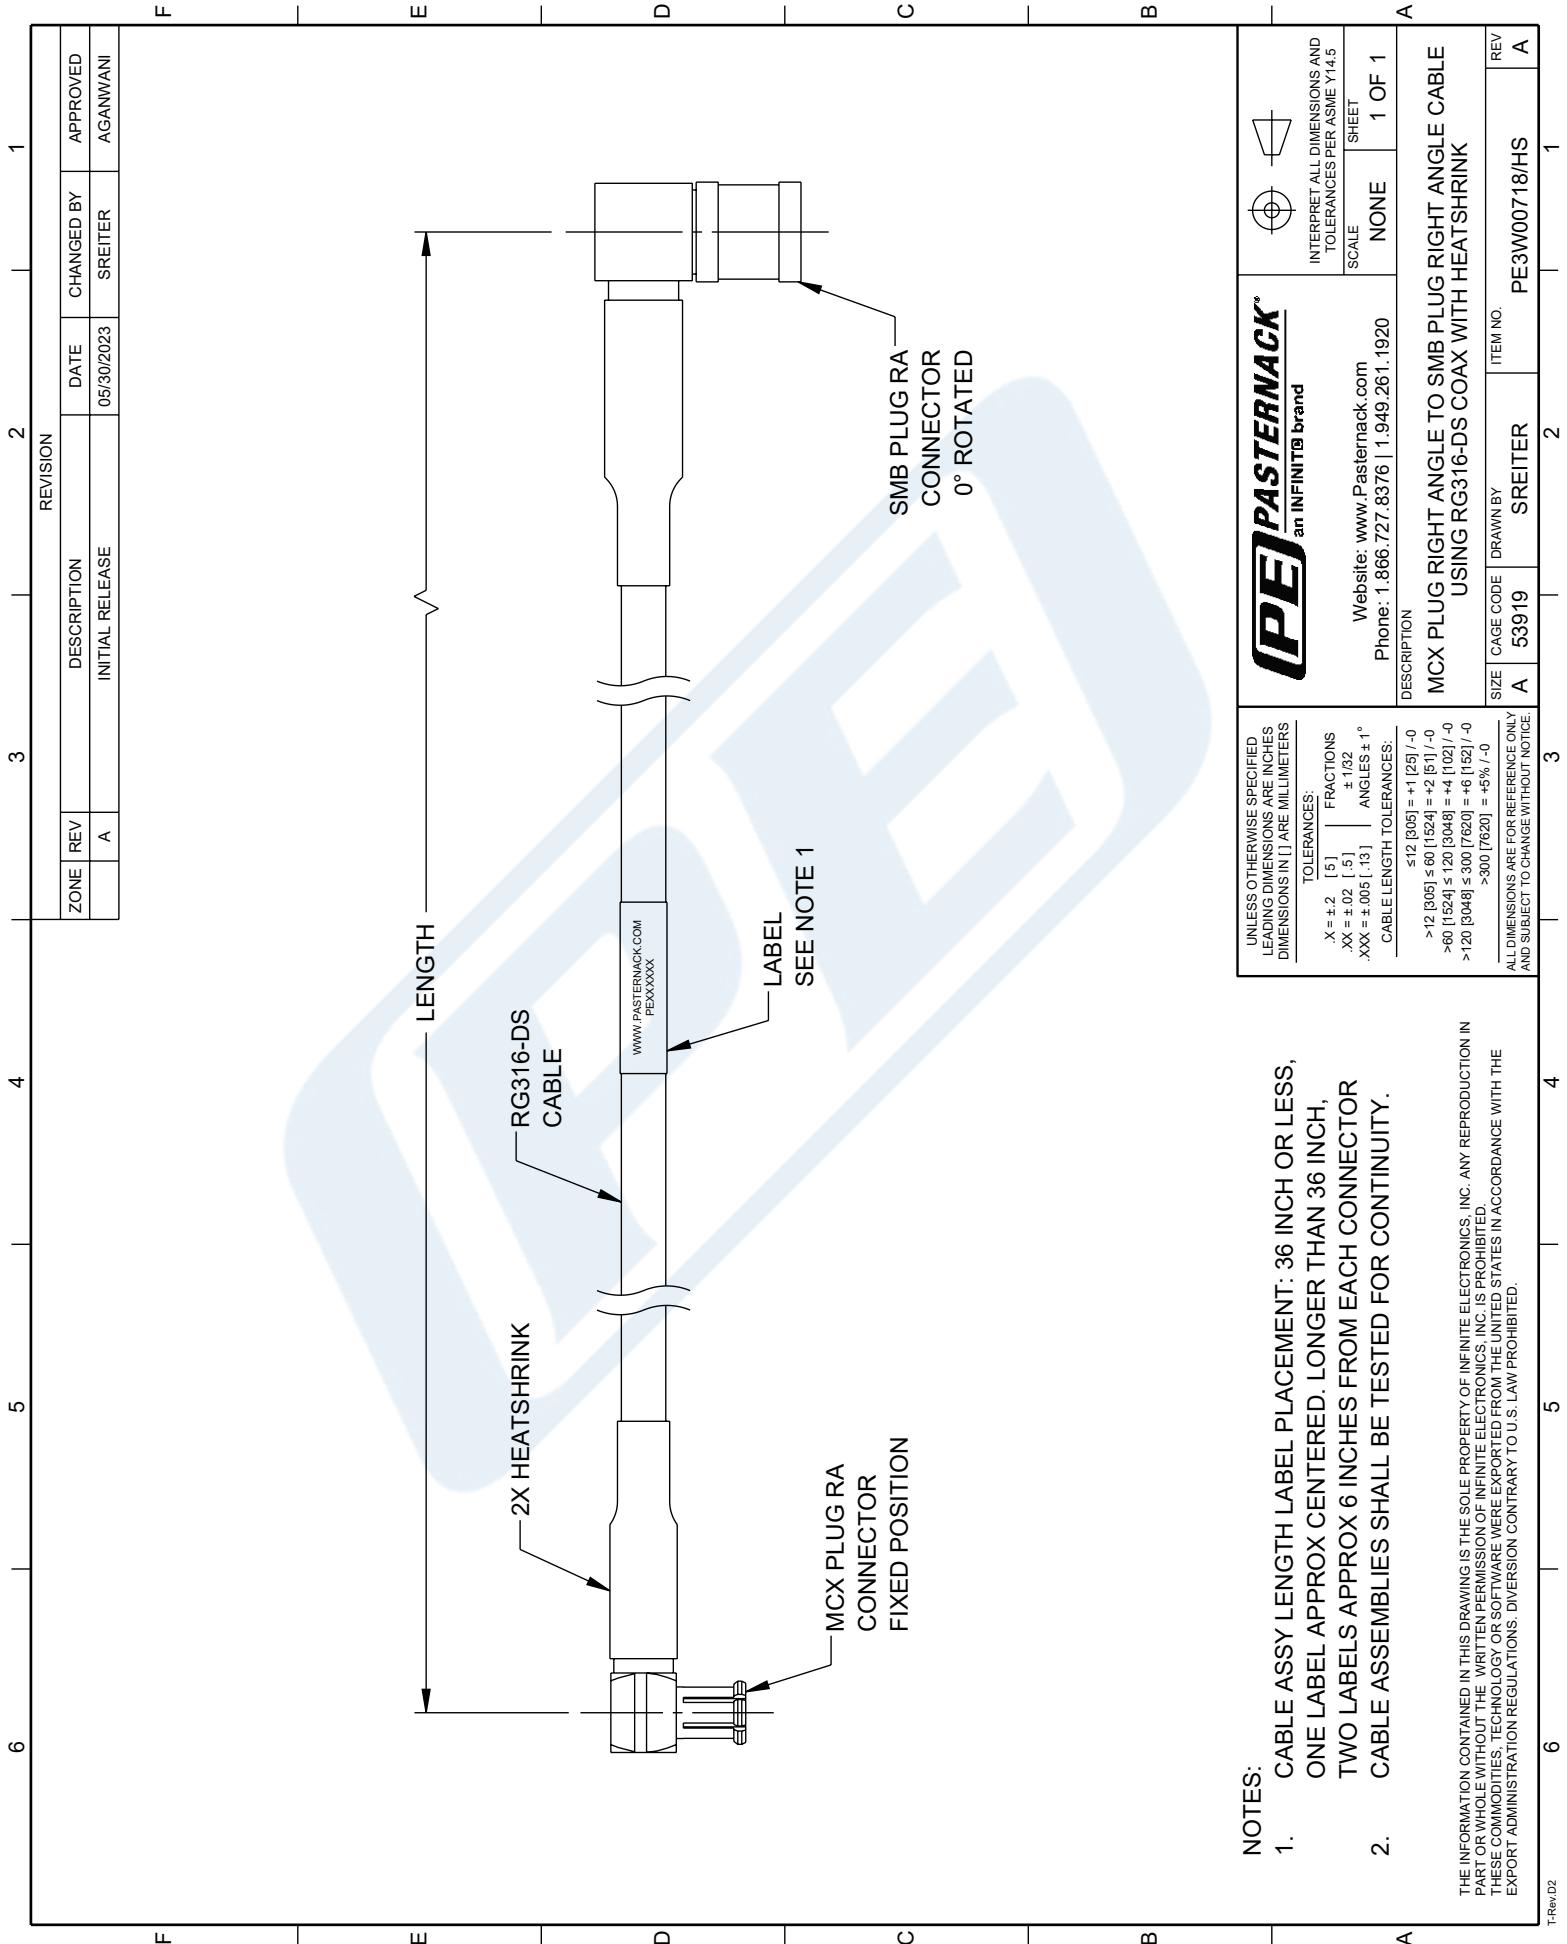

NOTES:

- CABLE ASSY LENGTH LABEL PLACEMENT: 36 INCH OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 36 INCH, TWO LABELS APPROX 6 INCHES FROM EACH CONNECTOR.
- CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PASTERNAK an INFINITE® brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE: NONE SHEET: 1 OF 1	
Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920		DESCRIPTION: MCX PLUG RIGHT ANGLE TO SMB PLUG RIGHT ANGLE CABLE USING RG316-DS COAX WITH HEATSHRINK	
SIZE: A	CAGE CODE: 53919	DRAWN BY: SREITER	ITEM NO.: PE3W00718/HS
UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: .X = ±.2 [.5] FRACTIONS .XX = ±.02 [.5] ±.132 .XXX = ±.005 [.13] ANGLES ± 1° CABLE LENGTH TOLERANCES: ≤12 [305] = ±.1 [25] / -0 >12 [305] ≤ 60 [1524] = ±.2 [51] / -0 >60 [1524] ≤ 120 [3048] = ±.4 [102] / -0 >120 [3048] ≤ 300 [7620] = ±.6 [152] / -0 >300 [7620] = ±.5% / -0 ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.		REV: A	