



N Male to BNC Male Low Loss Cable Using LMR-200-UF Coax with Times Microwave Components

TECHNICAL DATA SHEET


PE3W01440

Configuration

- Connector 1: N Male
- Connector 2: BNC Male
- Cable Type: LMR-200-UF
- Coax Flex Type: Flexible

Features

- Max Frequency 4 GHz
- Shielding Effectivity > 90 dB
- 83% Phase Velocity
- Double Shielded
- TPE Jacket

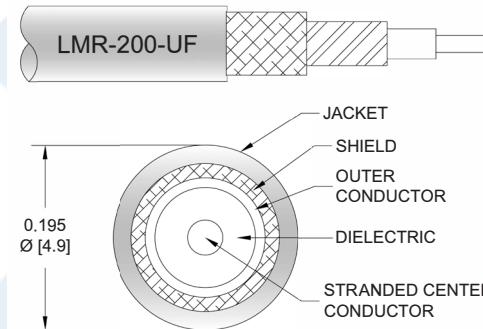

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W01440 type N male to BNC male cable using LMR-200-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to BNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-200-UF coax. The PE3W01440 type N male to BNC male cable assembly operates to 4 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to BNC Male Low Loss Cable Using LMR-200-UF Coax with Times Microwave Components PE3W01440](#)



N Male to BNC Male Low Loss Cable Using LMR-200-UF Coax with Times Microwave Components

TECHNICAL DATA SHEET

PE3W01440

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		83		%
RF Shielding	90			dB
Group Delay		1.22 [4]		ns/ft [ns/m]
Capacitance		24.5 [80.38]		pF/ft [pF/m]
Inductance		0.061 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		7.5 [24.61]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		4.9 [16.08]		Ω/1000ft [Ω/Km]
Jacket Spark			3,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency	100	250	500	1000	4000	MHz
PE3W01440	Custom Lengths Available	Insertion Loss (Typ.)	0.04	0.06	0.09	0.11	0.25	dB/ft	
			0.14	0.2	0.3	0.37	0.83	dB/m	
PE3W01440-12	12 inch	Insertion Loss (Typ.)	0.24	0.26	0.29	0.31	0.45	dB	0.12
PE3W01440-24	24 inch	Insertion Loss (Typ.)	0.28	0.32	0.38	0.42	0.7	dB	0.14
PE3W01440-36	36 inch	Insertion Loss (Typ.)	0.32	0.38	0.47	0.53	0.95	dB	0.16
PE3W01440-60	60 inch	Insertion Loss (Typ.)	0.4	0.5	0.65	0.75	1.45	dB	0.21
PE3W01440-200CM	200 cm	Insertion Loss (Typ.)	0.47	0.6	0.8	0.93	1.85	dB	0.242

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB

Loss due to Connector 2: 0.1 dB

Base Weight: 0.12 pounds

Additional Weight per Inch: 0.00184 pounds

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Weight	0.137 lbs [62.14 g]
--------	---------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to BNC Male Low Loss Cable Using LMR-200-UF Coax with Times Microwave Components PE3W01440](#)



N Male to BNC Male Low Loss Cable Using LMR-200-UF Coax with Times Microwave Components

TECHNICAL DATA SHEET

PE3W01440
Cable

Cable Type	LMR-200-UF
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	TPE, Black
Jacket Diameter	0.195 in [4.95 mm]

One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

Connectors

Description	Connector 1	Connector 2
Type	N Male Threaded	BNC Male Bayonet
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Phosphor Bronze	Brass, Tri-Metal
Hex Size	13/16 Inch	

Environmental Specifications
Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to BNC Male Low Loss Cable Using LMR-200-UF Coax with Times Microwave Components PE3W01440](#)



N Male to BNC Male Low Loss Cable Using LMR-200-UF Coax with Times Microwave Components

TECHNICAL DATA SHEET

PE3W01440

How to Order

Part Number Configuration:

PE3W01440- **xx****uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W01440-12 = 12 inches long cable
PE3W01440-100cm = 100 cm long cable

N Male to BNC Male Low Loss Cable Using LMR-200-UF Coax with Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to BNC Male Low Loss Cable Using LMR-200-UF Coax with Times Microwave Components PE3W01440](#)

URL: <https://www.pasternack.com/n-male-to-bnc-male-low-loss-cable-using-lmr-200-uf-pe3w01440-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W01440 CAD Drawing

N Male to BNC Male Low Loss Cable Using LMR-200-UF Coax with Times Microwave Components

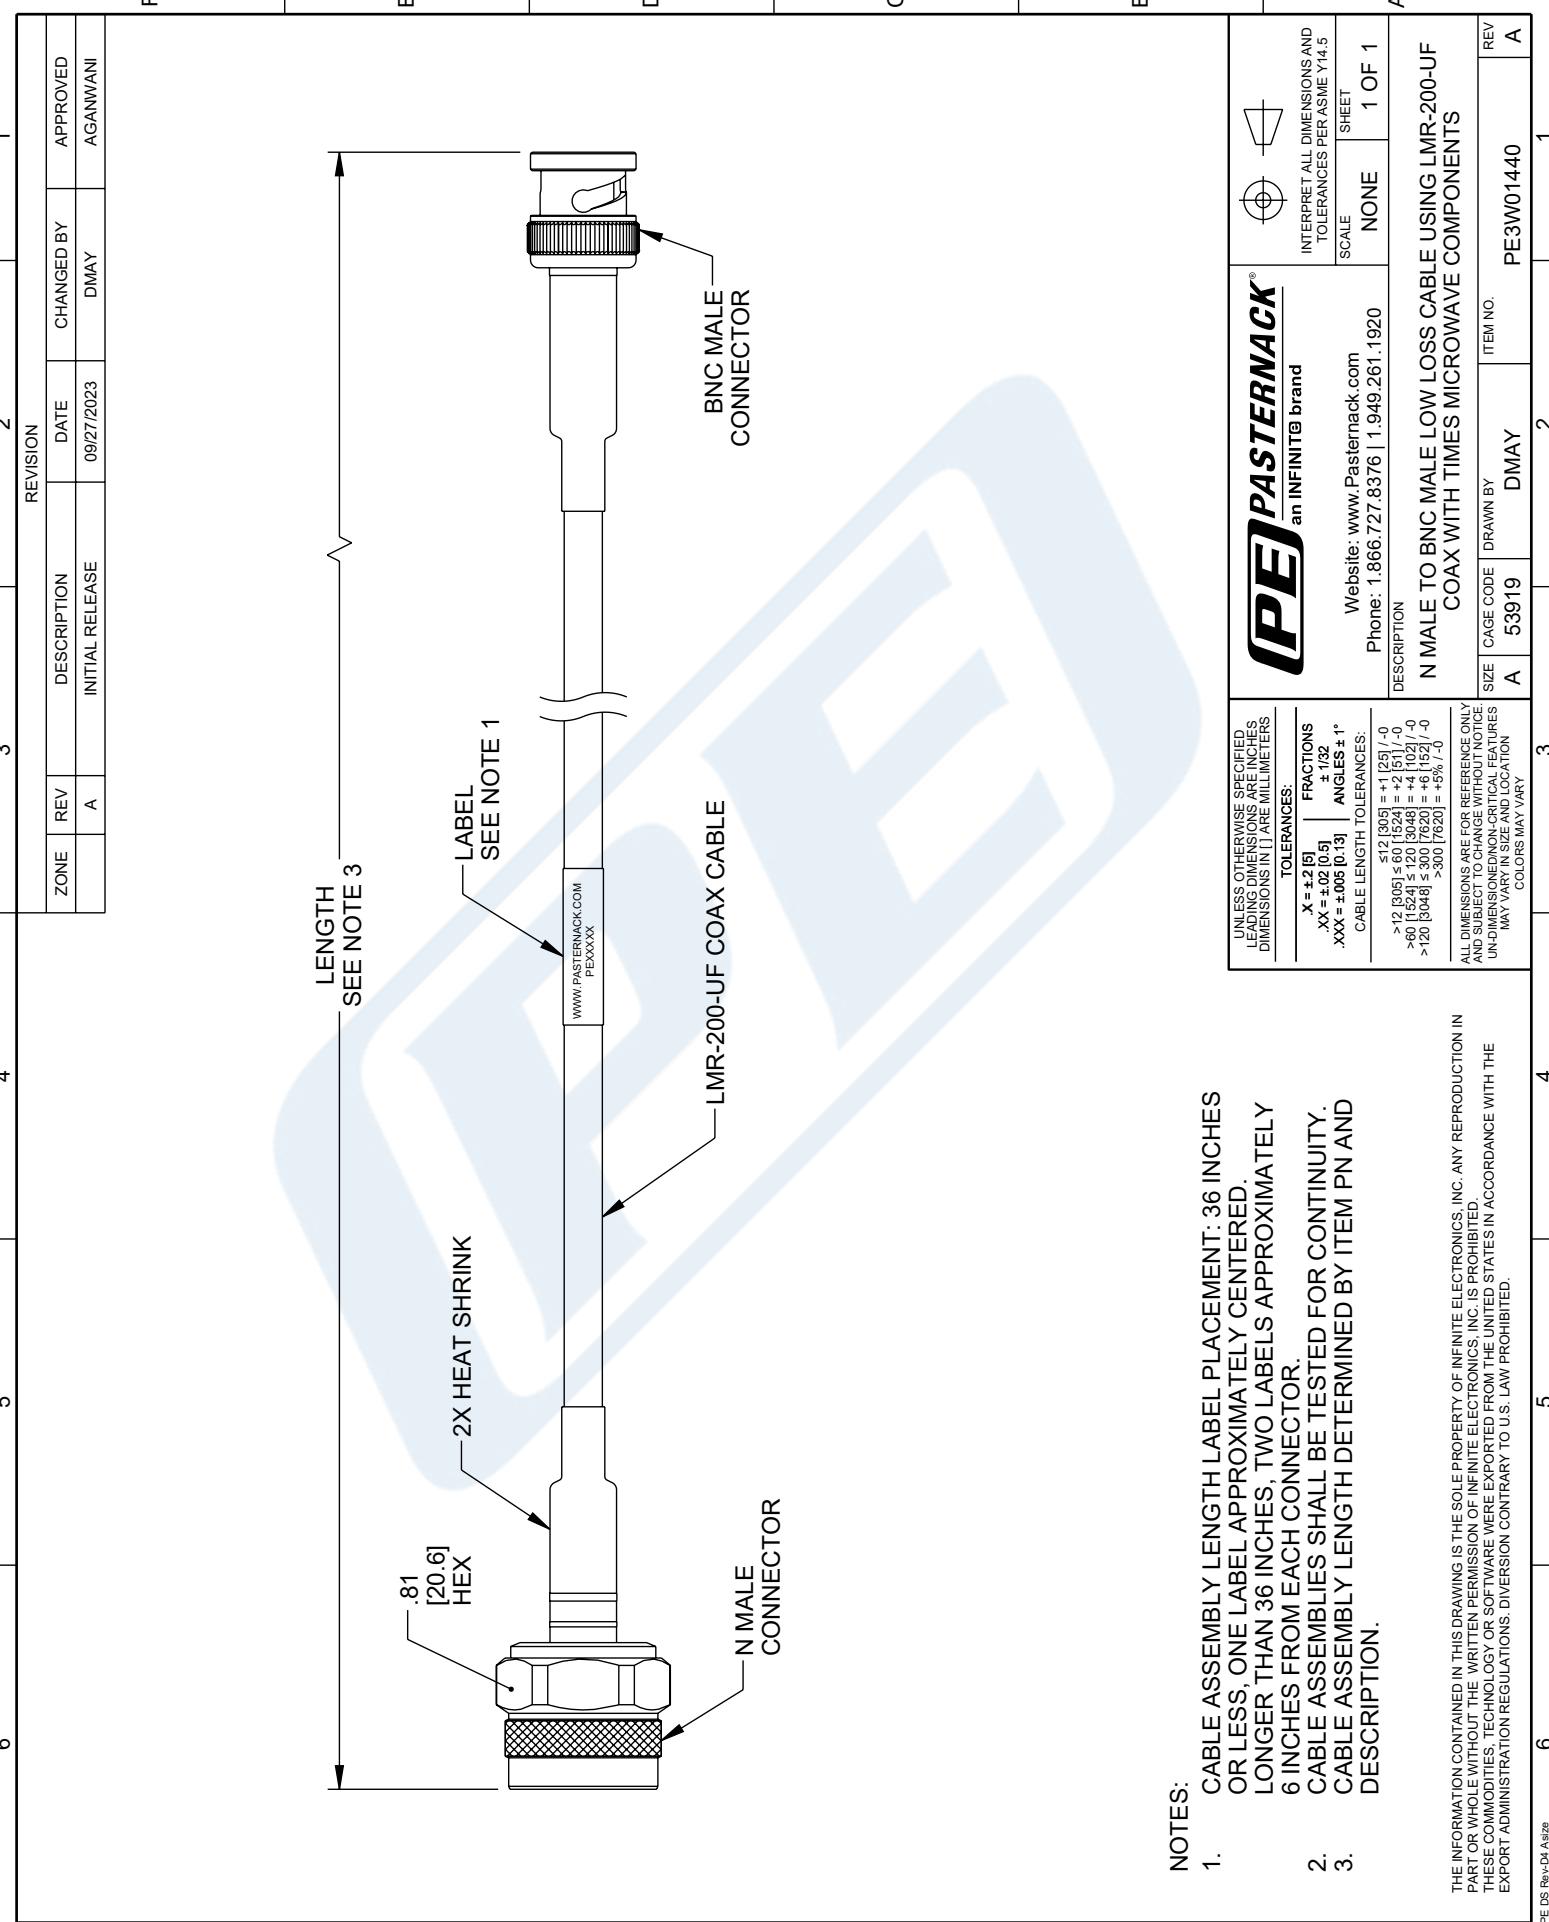

 an INFINITE® brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
SCALE	SHEET	1 OF 1	
NONE		DESCRIPTION	
N MALE TO BNC MALE LOW LOSS CABLE USING LMR-200-UF COAX WITH TIMES MICROWAVE COMPONENTS		ITEM NO.	PE3W01440

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. FOLLOWING DIMENSIONS IN [] ARE MILLIMETERS	TOLERANCES:	
.XX = $\pm .02$ [0.5]		FRACTIONS $\frac{1}{16}$
.XXX = $\pm .005$ [0.13]		ANGLES $\pm 1^\circ$
CABLE LENGTH TOLERANCES:		
>12 [305] \leq 60 [1524] $= +1$ [25] / -0		>12 [305] \leq 60 [1524] $= +2$ [51] / -0
>60 [1524] \leq 120 [3048] $= +4$ [102] / -0		>60 [1524] \leq 120 [3048] $= +6$ [152] / -0
>300 [7620] $= +5\%$ / -0		>300 [7620] $= +5\%$ / -0