

Reverse Polarity SMA Male to Reverse Polarity SMA Male Low Loss Cable Using LMR-400-UF Coax, LF Solder




PE3W05674LF

Configuration

- Connector 1: SMA Male Reverse Polarity
- Connector 2: SMA Male Reverse Polarity
- Cable Type: LMR-400-UF
- Coax Flex Type: Flexible

Features

- Max Frequency 8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- TPE Jacket

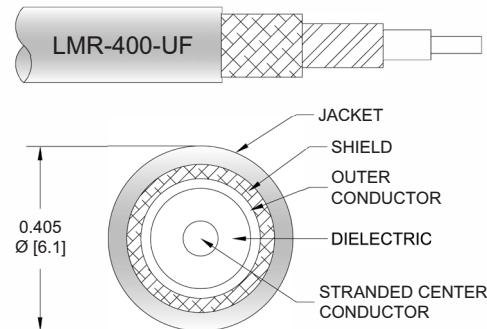

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W05674LF reverse polarity SMA male to reverse polarity SMA male cable using LMR-400-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack reverse polarity SMA to reverse polarity SMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400-UF coax. The PE3W05674LF reverse polarity SMA male to reverse polarity SMA male cable assembly operates to 8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.4:1	
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.07 [3.51]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		1.65 [5.41]		Ohms/1000ft [Ohms/Km]

Reverse Polarity SMA Male to Reverse Polarity SMA Male Low Loss Cable Using LMR-400-UF Coax, LF Solder



PE3W05674LF

Electrical Specifications

Description	Minimum	Typical					Maximum	Units
Jacket Spark						8,000		Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	500	1000	2000	4000	8000	MHz	
PE3W05674LF	Custom Lengths Available	Insertion Loss (Typ.)	0.035	0.05	0.072	0.094	0.13	dB/ft	
			0.12	0.17	0.24	0.31	0.43	dB/m	
PE3W05674LF-12	12 inch	Insertion Loss (Typ.)	0.24	0.25	0.28	0.3	0.33	dB	0.227
PE3W05674LF-24	24 inch	Insertion Loss (Typ.)	0.27	0.3	0.35	0.39	0.46	dB	0.314
PE3W05674LF-36	36 inch	Insertion Loss (Typ.)	0.31	0.35	0.42	0.49	0.59	dB	0.401
PE3W05674LF-60	60 inch	Insertion Loss (Typ.)	0.38	0.45	0.56	0.67	0.85	dB	0.575
PE3W05674LF-300	300 inch	Insertion Loss (Typ.)	1.08	1.45	2	2.55	3.45	dB	2.315

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
Loss due to Connector 2: 0.1 dB
Base Weight: 0.227 pounds
Additional Weight per Inch: 0.00725 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
Weight 0.227 lbs [102.97 g]

Cable

Cable Type LMR-400-UF
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper
Dielectric Type PE (F)
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid
Jacket Material TPE, Black
Jacket Diameter 0.405 in [10.29 mm]
One Time Minimum Bend Radius 1 in [25.4 mm]
Repeated Minimum Bend Radius 4 in [101.6 mm]
Bending Moment 0.38 lbs-ft [0.52 N-m]
Flat Plate Crush 20 lbs/in [0.36 Kg/mm]
Tensile Strength 160 lbs [72.57 Kg]

Reverse Polarity SMA Male to Reverse Polarity SMA Male
Low Loss Cable Using LMR-400-UF Coax, LF Solder



PE3W05674LF

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Reverse Polarity	SMA Male Reverse Polarity
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold
Coupling Nut Material and Plating	Brass, Gold	Brass, Gold
Hex Size	5/16 inch	5/16 inch
Torque	3 in-lbs 0.34 Nm	3 in-lbs 0.34 Nm

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Reverse Polarity SMA Male to Reverse Polarity SMA Male Low Loss Cable Using LMR-400-UF Coax, LF Solder




PE3W05674LF

Typical Performance Data

How to Order

Part Number Configuration:

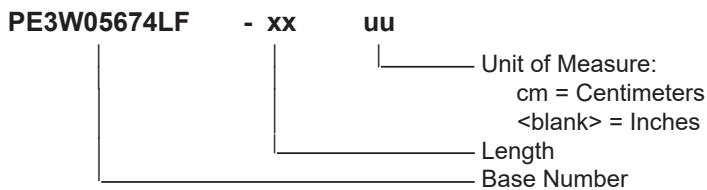

Example: PE3W05674LF-12 = 12 inches long cable
PE3W05674LF-100cm = 100 cm long cable

Reverse Polarity SMA Male to Reverse Polarity SMA Male Low Loss Cable Using LMR-400-UF Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to Reverse Polarity SMA Male Low Loss Cable Using LMR-400-UF Coax, LF Solder PE3W05674LF](#)

URL: <https://www.pasternack.com/reverse-polarity-sma-male-to-reverse-polarity-sma-male-low-loss-cable-using-lmr-400-uf-lf-solder-pe3w05674lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W05674LF CAD Drawing

Reverse Polarity SMA Male to Reverse Polarity SMA Male Low Loss Cable Using LMR-400-UF Coax, LF Solder

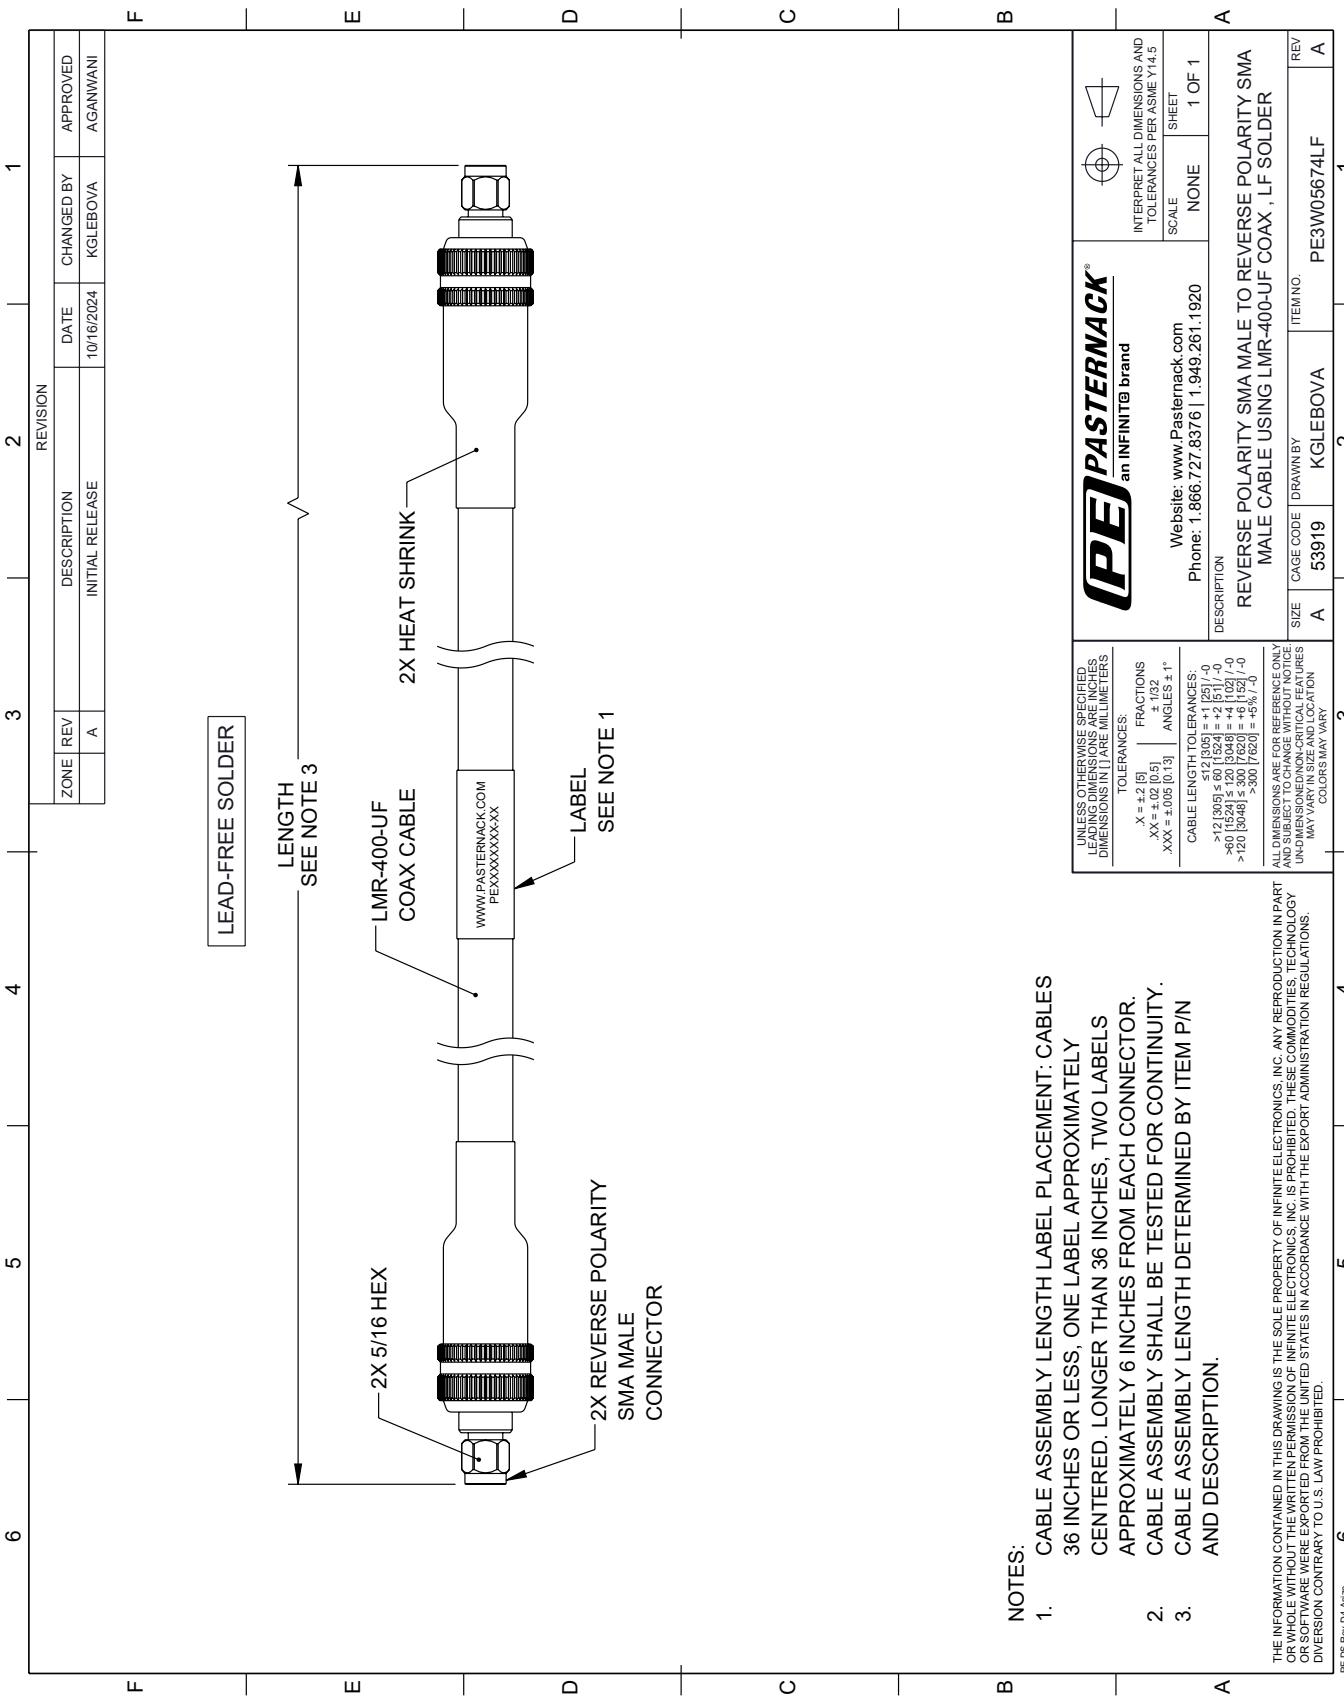

 PASTERNACK an INFINITE® brand	
INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
SCALE	SHEET
None	1 OF 1
DESCRIPTION	REVERSE POLARITY SMA MALE TO REVERSE POLARITY SMA MALE CABLE USING LMR-400-UF COAX , LF SOLDER
ITEM NO.	PE3W05674LF
SIZE	REV
A	A
CAGE CODE	53919
DRAWN BY	KGLEBOVA
ITEM NO.	PE3W05674LF
REV	A