

SMA Male to SMP Female Right Angle Cable  
150 cm Length Using PE-SR405FLJ Coax



**RF Cable Assemblies Technical Data Sheet**

**PE3W06701-150CM**

**Configuration**

- Connector 1: SMA Male
- Connector 2: SMP Female Right Angle
- Cable Type: PE-SR405FLJ

**Features**

- Max Frequency 18 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket



**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3W06701-150CM SMA male to SMP female right angle 150 cm cable using PE-SR405FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMP cable assembly has a male to female gender configuration with 50 ohm formable PE-SR405FLJ coax. The PE3W06701-150CM SMA male to SMP female cable assembly operates to 18 GHz. The right angle SMP interface on the PE-SR405FLJ cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMP Female Right Angle Cable 150 cm Length Using PE-SR405FLJ Coax PE3W06701-150CM](#)

SMA Male to SMP Female Right Angle Cable  
150 cm Length Using PE-SR405FLJ Coax



**RF Cable Assemblies Technical Data Sheet**

**PE3W06701-150CM**

**Electrical Specifications**

| Description                   | Minimum | Typical       | Maximum | Units           |
|-------------------------------|---------|---------------|---------|-----------------|
| Frequency Range               | DC      |               | 18      | GHz             |
| VSWR                          |         |               | 1.45:1  |                 |
| Velocity of Propagation       |         | 69.5          |         | %               |
| RF Shielding                  | 100     |               |         | dB              |
| Group Delay                   |         | 1.43 [4.69]   |         | ns/ft [ns/m]    |
| Capacitance                   |         | 29 [95.14]    |         | pF/ft [pF/m]    |
| DC Resistance Inner Conductor |         | 65.7 [215.55] |         | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor |         | 10.2 [33.46]  |         | Ω/1000ft [Ω/Km] |

**Specifications by Frequency**

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 1    | 2    | 4.5  | 9    | 18   | GHz   |
| Insertion Loss (Max.) | 1.41 | 1.81 | 2.81 | 4.04 | 5.81 | dB    |

**Electrical Specification Notes:**

The Insertion Loss data above is based on the performance specifications of the coax use in the assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector loss.

**Mechanical Specifications**

**Cable Assembly**

|          |                      |
|----------|----------------------|
| Length*  | 59.05 in [149.99 cm] |
| Diameter | 0.315 in [8 mm]      |

**Cable**

|                                      |                               |
|--------------------------------------|-------------------------------|
| Cable Type                           | PE-SR405FLJ                   |
| Impedance                            | 50 Ohms                       |
| Inner Conductor Type                 | Solid                         |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver     |
| Dielectric Type                      | PTFE                          |
| Number of Shields                    | 1                             |
| Outer Conductor Material and Plating | Tinned Copper Composite Braid |
| Jacket Material                      | FEP, Black                    |
| Jacket Diameter                      | 0.105 in [2.67 mm]            |
| One Time Minimum Bend Radius         | 0.5 in [12.7 mm]              |
| Repeated Minimum Bend Radius         | 0.787 in [19.99 mm]           |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMP Female Right Angle Cable 150 cm Length Using PE-SR405FLJ Coax PE3W06701-150CM](#)

SMA Male to SMP Female Right Angle Cable  
150 cm Length Using PE-SR405FLJ Coax



**RF Cable Assemblies Technical Data Sheet**

**PE3W06701-150CM**

**Connectors**

| Description                        | Connector 1           | Connector 2            |
|------------------------------------|-----------------------|------------------------|
| Type                               | SMA Male              | SMP Female Right Angle |
| Specification                      | MIL-STD-348A          | MIL-STD-348            |
| Impedance                          | 50 Ohms               | 50 Ohms                |
| Mating Cycles                      | 500                   |                        |
| Contact Material and Plating       | Brass, Gold           | Beryllium Copper, Gold |
| Contact Plating Specification      | 50 µin minimum        | MIL-G-45204            |
| Dielectric Type                    | PTFE                  | PTFE                   |
| Body Material and Plating          | Stainless Steel, Gold | Beryllium Copper, Gold |
| Body Plating Specification         | 10 µin minimum        | MIL-G-45204            |
| Coupling Nut Material and Plating  | Brass, Nickel         |                        |
| Coupling Nut Plating Specification | 100 µin minimum       |                        |
| Hex Size                           | 5/16 inch             |                        |
| Torque                             | 3 in-lbs [0.34 Nm]    |                        |

**Environmental Specifications**

**Temperature**

Operating Range -55 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMP Female Right Angle Cable 150 cm Length Using PE-SR405FLJ Coax PE3W06701-150CM](#)

SMA Male to SMP Female Right Angle Cable  
150 cm Length Using PE-SR405FLJ Coax



**RF Cable Assemblies Technical Data Sheet**

**PE3W06701-150CM**

**How to Order**

Part Number Configuration:

**PE3W06701**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W06701-12 = 12 inches long cable  
PE3W06701-100cm = 100 cm long cable

SMA Male to SMP Female Right Angle Cable 150 cm Length Using PE-SR405FLJ Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMP Female Right Angle Cable 150 cm Length Using PE-SR405FLJ Coax PE3W06701-150CM](https://www.pasternack.com/sma-male-smp-female-pe-sr405flj-cable-assembly-pe3w06701-150cm-p.aspx)


URL: <https://www.pasternack.com/sma-male-smp-female-pe-sr405flj-cable-assembly-pe3w06701-150cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W06701-150CM CAD Drawing

SMA Male to SMP Female Right Angle Cable 150 cm Length Using PE-SR405FLJ Coax

| REVISIONS |               |           |          |
|-----------|---------------|-----------|----------|
| REV.      | DESCRIPTION   | DATE      | APPROVED |
| B         | PCR PE3W06701 | 2/24/2021 | S. ELLIS |

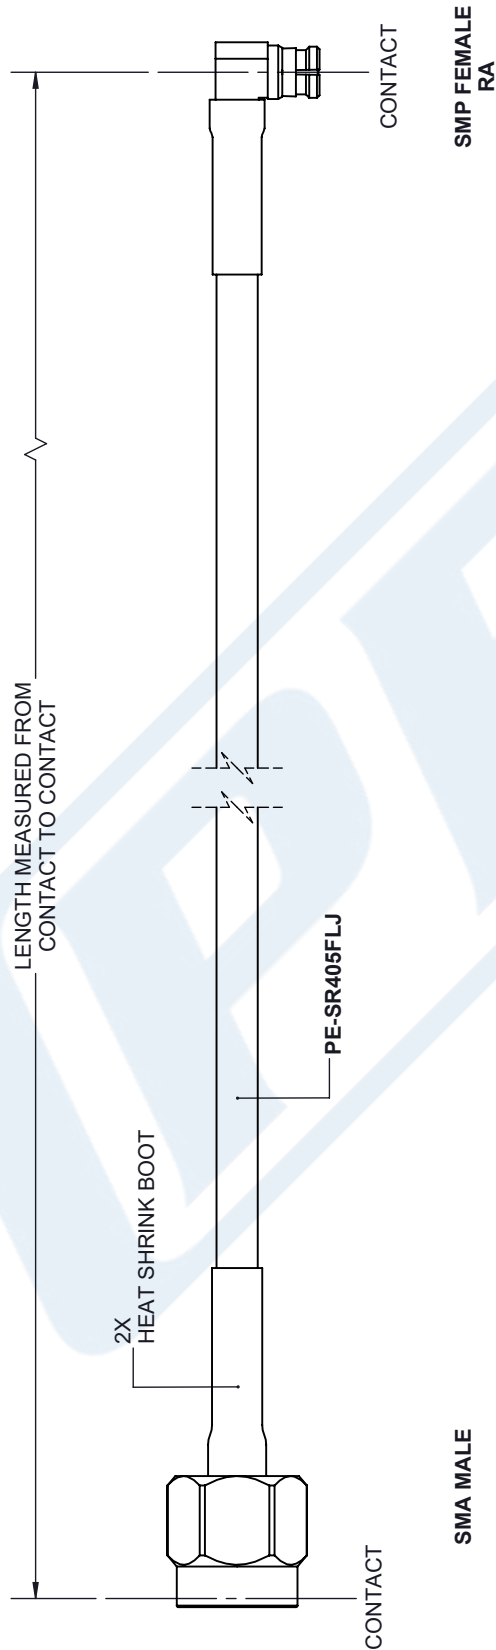

|                                                                                                  |  |        |  |                                                                                     |  |                                                                                                                       |  |
|--------------------------------------------------------------------------------------------------|--|--------|--|-------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------|--|
| UNLESS OTHERWISE SPECIFIED<br>LEADING DIMENSIONS ARE INCHES<br>DIMENSIONS IN [ ] ARE MILLIMETERS |  |        |  | THIRD-ANGLE PROJECTION                                                              |  |                                                                                                                       |  |
| TOLERANCES:                                                                                      |  |        |  |  |  |                                                                                                                       |  |
| X = ± .2                                                                                         |  | [.008] |  | FRACTIONS                                                                           |  | THE INFORMATION AND<br>DESIGN IN THIS DOCUMENT<br>IS THE PROPERTY OF<br>PASTERNAK CORPORATION<br>ALL RIGHTS RESERVED. |  |
| .XX = ± .02                                                                                      |  | [.51]  |  | ± 1/32                                                                              |  |                                                                                                                       |  |
| XXX = ± .005                                                                                     |  | [.13]  |  | ANGLES ± 1°                                                                         |  |                                                                                                                       |  |
| CABLE LENGTH (L) TOLERANCES:                                                                     |  |        |  | SHEET 1 OF 1                                                                        |  |                                                                                                                       |  |
| L ≤ 12 [305]                                                                                     |  |        |  | SCALE N/A                                                                           |  |                                                                                                                       |  |
| 12 [305] < L ≤ 60 [1524]                                                                         |  |        |  |                                                                                     |  |                                                                                                                       |  |
| 60 [1524] < L ≤ 120 [3048]                                                                       |  |        |  |                                                                                     |  |                                                                                                                       |  |
| 120 [3048] < L ≤ 300 [7620]                                                                      |  |        |  |                                                                                     |  |                                                                                                                       |  |
| 300 [7620] < L = ±.5% L / -0                                                                     |  |        |  |                                                                                     |  |                                                                                                                       |  |
| ALL DIMENSIONS SHOWN<br>ARE FOR REFERENCE ONLY.                                                  |  |        |  | REV A                                                                               |  |                                                                                                                       |  |
| SIZE A                                                                                           |  |        |  | CAGE CODE 53919                                                                     |  | ITEM NO. PE3W06701                                                                                                    |  |
| DRAWN BY K.DANG                                                                                  |  |        |  |                                                                                     |  |                                                                                                                       |  |
| Website: www.pasternack.com                                                                      |  |        |  |                                                                                     |  |                                                                                                                       |  |
| E-mail: sales@pasternack.com                                                                     |  |        |  |                                                                                     |  |                                                                                                                       |  |
| Fax: 1.949.261.7451                                                                              |  |        |  |                                                                                     |  |                                                                                                                       |  |
| Phone: 1.949.261.1920   1.866.727.8376                                                           |  |        |  |                                                                                     |  |                                                                                                                       |  |
| P.O. Box 16759, Irvine, CA 92623.                                                                |  |        |  |                                                                                     |  |                                                                                                                       |  |
| Pasternack Enterprises, Inc.                                                                     |  |        |  |                                                                                     |  |                                                                                                                       |  |
| an INFINITE® brand                                                                               |  |        |  |                                                                                     |  |                                                                                                                       |  |
|               |  |        |  |                                                                                     |  |                                                                                                                       |  |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.