

TNC Male to SMA Male Right Angle Low Loss  
Cable Using LMR-200 Coax with HeatShrink




**RF Cable Assemblies Technical Data Sheet**

**PE3W07265/HS**


**Configuration**

- Connector 1: TNC Male
- Connector 2: SMA Male Right Angle
- Cable Type: LMR-200



**Features**

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 83% Phase Velocity
- Double Shielded
- PE Jacket

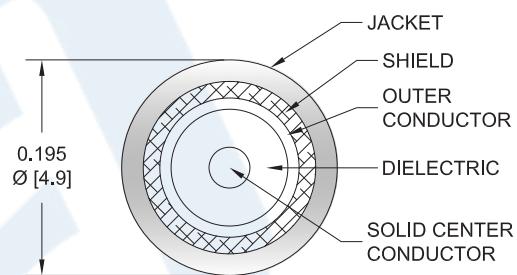

**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3W07265/HS TNC male to SMA male right angle cable using LMR-200 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to SMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-200 coax. The PE3W07265/HS TNC male to SMA male cable assembly operates to 5.8 GHz. The right angle SMA interface on the LMR-200 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to SMA Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink PE3W07265/HS](#)



## TNC Male to SMA Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

**PE3W07265/HS**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.5:1	
Velocity of Propagation		83		%
RF Shielding	90			dB
Group Delay		1.22 [4]		ns/ft [ns/m]
Capacitance		24.5 [80.38]		pF/ft [pF/m]
Inductance		0.061 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		5.36 [17.59]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		4.9 [16.08]		Ω/1000ft [Ω/Km]
Jacket Spark			3,000	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.05	0.073	0.104	0.169	0.264	dB/ft
	0.16	0.24	0.34	0.55	0.87	dB/m

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB for the right angle connector and 0.1 dB for the straight connector.

#### Mechanical Specifications

##### Cable Assembly

Weight 0.095 lbs [43.09 g]

##### Cable

Cable Type LMR-200  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper  
Dielectric Type PE (F)  
Number of Shields 2  
Shield Layer 1 Aluminum Tape  
Shield Layer 2 Tinned Copper Braid  
Jacket Material PE, Black  
Jacket Diameter 0.195 in [4.95 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to SMA Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink PE3W07265/HS](#)



## TNC Male to SMA Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

**PE3W07265/HS**

One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.2 lbs-ft [0.27 N-m]
Flat Plate Crush	15 lbs/in [0.27 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	TNC Male	SMA Male Right Angle
Specification	MIL-STD-348	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Gold
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Gold
Hex Size	8-May Inch	

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +85 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to SMA Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink PE3W07265/HS](#)

## TNC Male to SMA Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink



### RF Cable Assemblies Technical Data Sheet

**PE3W07265/HS**

#### How to Order

Part Number Configuration:

**PE3W07265/HS** - **xx** **uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W07265/HS-12 = 12 inches long cable  
PE3W07265/HS-100cm = 100 cm long cable

TNC Male to SMA Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to SMA Male Right Angle Low Loss Cable Using LMR-200 Coax with HeatShrink PE3W07265/HS](#)


URL: <https://www.pasternack.com/tnc-male-to-sma-male-low-loss-cable-using-lmr-200-with-heatshrink-pe3w07265-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W07265/HS CAD Drawing

TNC Male to SMA Male Right Angle Low Loss Cable  
Using LMR-200 Coax with HeatShrink

תְּמִימָנָה תְּמִימָנָה תְּמִימָנָה תְּמִימָנָה

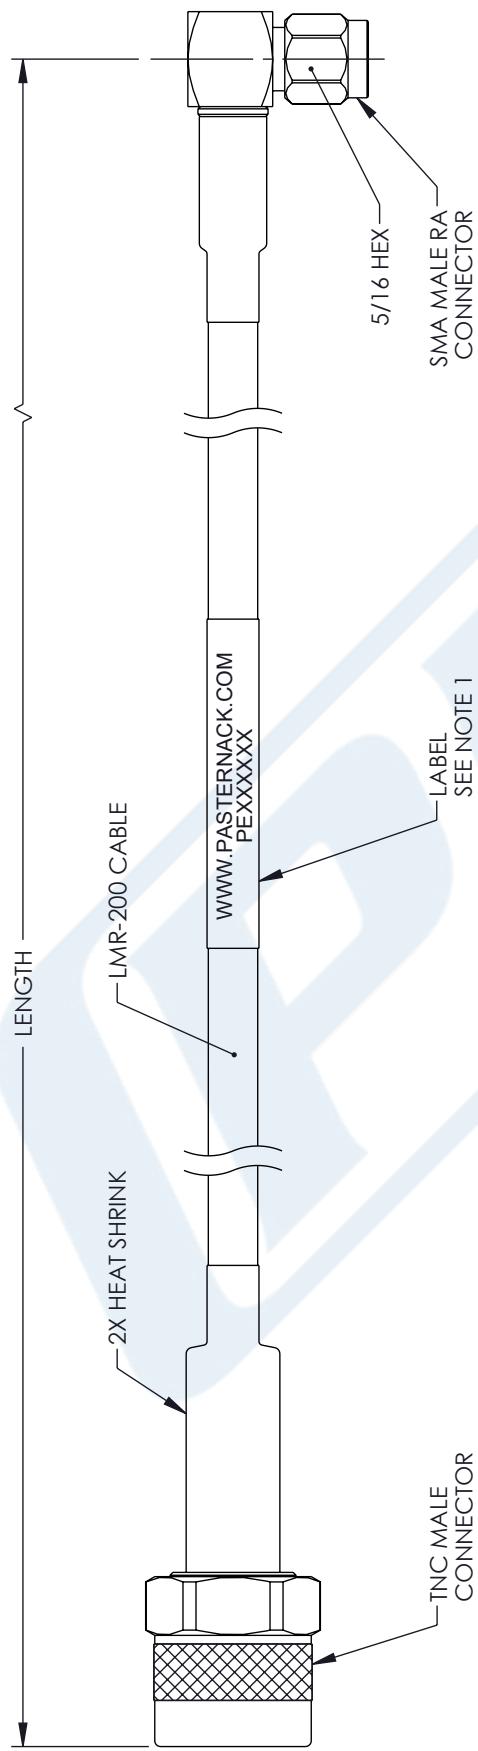

**NOTES:**

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:  
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.  
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES  
FROM EACH CONNECTOR.

2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.