



Reverse Polarity TNC Jack Bulkhead to SMA Female Cable Using RG316 Coax

RF Cable Assemblies Technical Data Sheet


PE3W09819

Configuration

- Connector 1: TNC Jack Reverse Polarity Bulkhead
- Connector 2: SMA Female
- Cable Type: RG316

Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

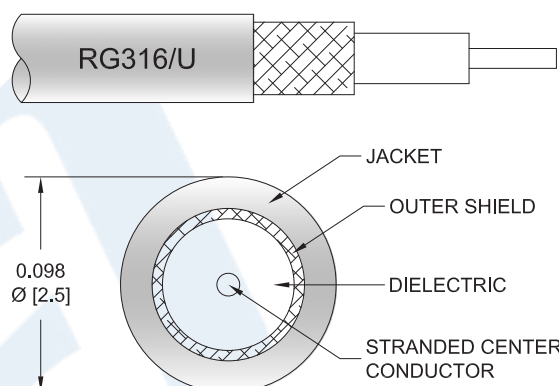

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W09819 reverse polarity TNC jack bulkhead to SMA female cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack reverse polarity TNC to SMA cable assembly has a jack to female gender configuration with 50 ohm flexible RG316 coax. The PE3W09819 reverse polarity TNC jack to SMA female cable assembly operates to 3 GHz. Our RF cable assembly with TNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Jack Bulkhead to SMA Female Cable Using RG316 Coax PE3W09819](#)



Reverse Polarity TNC Jack Bulkhead to SMA
Female Cable Using RG316 Coax

RF Cable Assemblies Technical Data Sheet

PE3W09819

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Operating Voltage (AC)			335	Vrms
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.11	0.159	0.238	0.379	0.58	dB/ft
	0.36	0.52	0.78	1.24	1.9	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.102 in [2.59 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Jack Bulkhead to SMA Female Cable Using RG316 Coax PE3W09819](#)



Reverse Polarity TNC Jack Bulkhead to SMA Female Cable Using RG316 Coax

RF Cable Assemblies Technical Data Sheet

PE3W09819

Connectors

Description	Connector 1	Connector 2
Type	TNC Jack Reverse Polarity Bulkhead	SMA Female
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	30 µin minimum	50µ in. minimum
Dielectric Type	PTFE	Teflon
Outer Conductor Material and Plating		Brass, Gold
Outer Conductor Plating Specification		3µ in. minimum
Body Material and Plating	Brass, Nickel	Brass, Gold
Body Plating Specification	100 µin minimum	3µ in. minimum

Environmental Specifications

Temperature

Operating Range -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Jack Bulkhead to SMA Female Cable Using RG316 Coax PE3W09819](#)



Reverse Polarity TNC Jack Bulkhead to SMA Female Cable Using RG316 Coax

RF Cable Assemblies Technical Data Sheet

PE3W09819

How to Order

Part Number Configuration:

PE3W09819

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W09819-12 = 12 inches long cable
PE3W09819-100cm = 100 cm long cable

Reverse Polarity TNC Jack Bulkhead to SMA Female Cable Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Jack Bulkhead to SMA Female Cable Using RG316 Coax PE3W09819](#)

URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W09819 CAD Drawing

Reverse Polarity TNC Jack Bulkhead to SMA Female Cable Using RG316 Coax

