



MCX Plug Right Angle to MCX Plug Right Angle Low Loss Cable Using PE-C100-LSZH Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet


PE3W10488LF/HS

Configuration

- Connector 1: MCX Plug Right Angle
- Connector 2: MCX Plug Right Angle
- Cable Type: PE-C100-LSZH

Features

- Max Frequency 3 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- LSZH Jacket

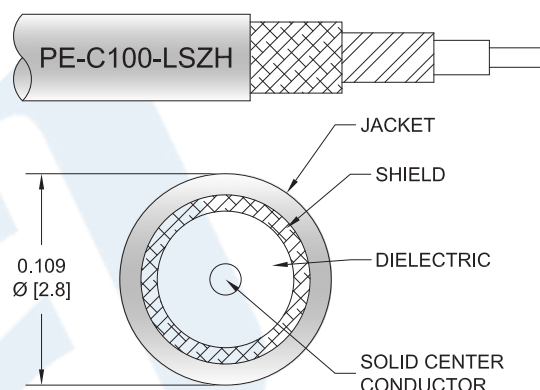

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W10488LF/HS MCX plug right angle to MCX plug right angle cable using PE-C100-LSZH coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MCX to MCX cable assembly has a plug to plug gender configuration with 50 ohm flexible PE-C100-LSZH coax. The PE3W10488LF/HS MCX plug to MCX plug cable assembly operates to 3 GHz. The right angle MCX interfaces on the PE-C100-LSZH cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to MCX Plug Right Angle Low Loss Cable Using PE-C100-LSZH Coax with HeatShrink, LF Solder PE3W10488LF/HS](#)



MCX Plug Right Angle to MCX Plug Right Angle Low Loss
Cable Using PE-C100-LSZH Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W10488LF/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.62 [5.31]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ω/1000ft [Ω/Km]
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.07	0.115	0.166	0.24	0.444	dB/ft
	0.23	0.38	0.54	0.79	1.46	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.028 lbs [12.7 g]

Cable

Cable Type PE-C100-LSZH
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper Clad Steel
Dielectric Type PE
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid
Jacket Material LSZH, Black
Jacket Diameter 0.109 in [2.77 mm]

One Time Minimum Bend Radius 0.25 in [6.35 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to MCX Plug Right Angle Low Loss Cable Using PE-C100-LSZH Coax with HeatShrink, LF Solder PE3W10488LF/HS](#)



MCX Plug Right Angle to MCX Plug Right Angle Low Loss
Cable Using PE-C100-LSZH Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W10488LF/HS

Repeated Minimum Bend Radius	1 in [25.4 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	15 lbs [6.8 Kg]

Connectors

Description	Connector 1	Connector 2
Type	MCX Plug Right Angle	MCX Plug Right Angle
Specification	CECC 22220	CECC 22220
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum

Environmental Specifications

Temperature

Operating Range	-40 to +60 deg C
-----------------	------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to MCX Plug Right Angle Low Loss Cable Using PE-C100-LSZH Coax with HeatShrink, LF Solder PE3W10488LF/HS](#)



MCX Plug Right Angle to MCX Plug Right Angle Low Loss Cable Using PE-C100-LSZH Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W10488LF/HS

How to Order

Part Number Configuration:

PE3W10488LF/HS - xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W10488LF/HS-12 = 12 inches long cable
PE3W10488LF/HS-100cm = 100 cm long cable

MCX Plug Right Angle to MCX Plug Right Angle Low Loss Cable Using PE-C100-LSZH Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to MCX Plug Right Angle Low Loss Cable Using PE-C100-LSZH Coax with HeatShrink, LF Solder PE3W10488LF/HS](https://www.pasternack.com/mcx-plug-right-angle-to-mcx-plug-right-angle-low-loss-cable-using-pe-c100-lszh-coax-with-heatshrink-lf-solder-pe3w10488lf-hs-p.aspx)

URL: <https://www.pasternack.com/mcx-plug-right-angle-to-mcx-plug-right-angle-low-loss-cable-using-pe-c100-lszh-coax-with-heatshrink-lf-solder-pe3w10488lf-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W10488LF/HS CAD Drawing

MCX Plug Right Angle to MCX Plug Right Angle Low Loss Cable
Using PE-C100-LSZH Coax with HeatShrink, LF Solder

