



## Water Blue FAKRA Jack to TNC Male Right Angle Low Loss Cable Using LMR-100A-UF Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

**PE3W13530/HS**

#### Configuration

- Connector 1: FAKRA Jack
- Connector 2: TNC Male Right Angle
- Cable Type: LMR-100A-UF

#### Features

- Max Frequency 4 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- TPE Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W13530/HS water blue FAKRA jack to TNC male right angle cable using LMR-100A-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack FAKRA to TNC cable assembly has a jack to male gender configuration with 50 ohm flexible LMR-100A-UF coax. The PE3W13530/HS FAKRA jack to TNC male cable assembly operates to 4 GHz. The right angle TNC interface on the LMR-100A-UF cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Water Blue FAKRA Jack to TNC Male Right Angle Low Loss Cable Using LMR-100A-UF Coax with HeatShrink PE3W13530/HS](#)



Water Blue FAKRA Jack to TNC Male Right Angle Low Loss Cable Using LMR-100A-UF Coax with HeatShrink

## RF Cable Assemblies Technical Data Sheet

PE3W13530/HS

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		$\Omega$ /1000ft [ $\Omega$ /Km]
DC Resistance Outer Conductor		9.5 [31.17]		$\Omega$ /1000ft [ $\Omega$ /Km]
Jacket Spark			2,000	Vrms

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
Insertion Loss (Typ.)	0.07	0.115	0.165	0.24	0.508	dB/ft
	0.23	0.38	0.54	0.79	1.67	dB/m

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

### Mechanical Specifications

#### Cable Assembly

Weight 0.066 lbs [29.94 g]

#### Cable

Cable Type LMR-100A-UF  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper  
 Dielectric Type PE  
 Number of Shields 2  
 Shield Layer 1 Aluminum Tape  
 Shield Layer 2 Tinned Copper  
 Jacket Material TPE, Black  
 Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Water Blue FAKRA Jack to TNC Male Right Angle Low Loss Cable Using LMR-100A-UF Coax with HeatShrink PE3W13530/HS](#)



Water Blue FAKRA Jack to TNC Male Right Angle Low Loss Cable Using LMR-100A-UF Coax with HeatShrink

**RF Cable Assemblies Technical Data Sheet**

**PE3W13530/HS**

One Time Minimum Bend Radius	0.25 in [6.35 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	15 lbs [6.8 Kg]

**Connectors**

Description	Connector 1	Connector 2
Type	FAKRA Jack	TNC Male Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Phosphor Bronze, Gold	Brass, Gold
Dielectric Type	PTFE	POM
Outer Conductor Material and Plating	Brass, Nickel	
Body Material and Plating	Plastic	Brass, Nickel

**Environmental Specifications**

**Temperature**

Operating Range	-40 to +85 deg C
-----------------	------------------

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Water Blue FAKRA Jack to TNC Male Right Angle Low Loss Cable Using LMR-100A-UF Coax with HeatShrink PE3W13530/HS](#)



## Water Blue FAKRA Jack to TNC Male Right Angle Low Loss Cable Using LMR-100A-UF Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

**PE3W13530/HS**

#### How to Order

Part Number Configuration:

**PE3W13530/HS - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W13530/HS-12 = 12 inches long cable  
PE3W13530/HS-100cm = 100 cm long cable

Water Blue FAKRA Jack to TNC Male Right Angle Low Loss Cable Using LMR-100A-UF Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Water Blue FAKRA Jack to TNC Male Right Angle Low Loss Cable Using LMR-100A-UF Coax with HeatShrink PE3W13530/HS](https://www.pasternack.com/jack-to-tnc-male-low-loss-cable-using-lmr-100a-uf-with-heatshrink-pe3w13530-hs-p.aspx)

URL: <https://www.pasternack.com/jack-to-tnc-male-low-loss-cable-using-lmr-100a-uf-with-heatshrink-pe3w13530-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W13530/HS CAD Drawing

## Water Blue FAKRA Jack to TNC Male Right Angle Low Loss Cable Using LMR-100A-UF Coax with HeatShrink

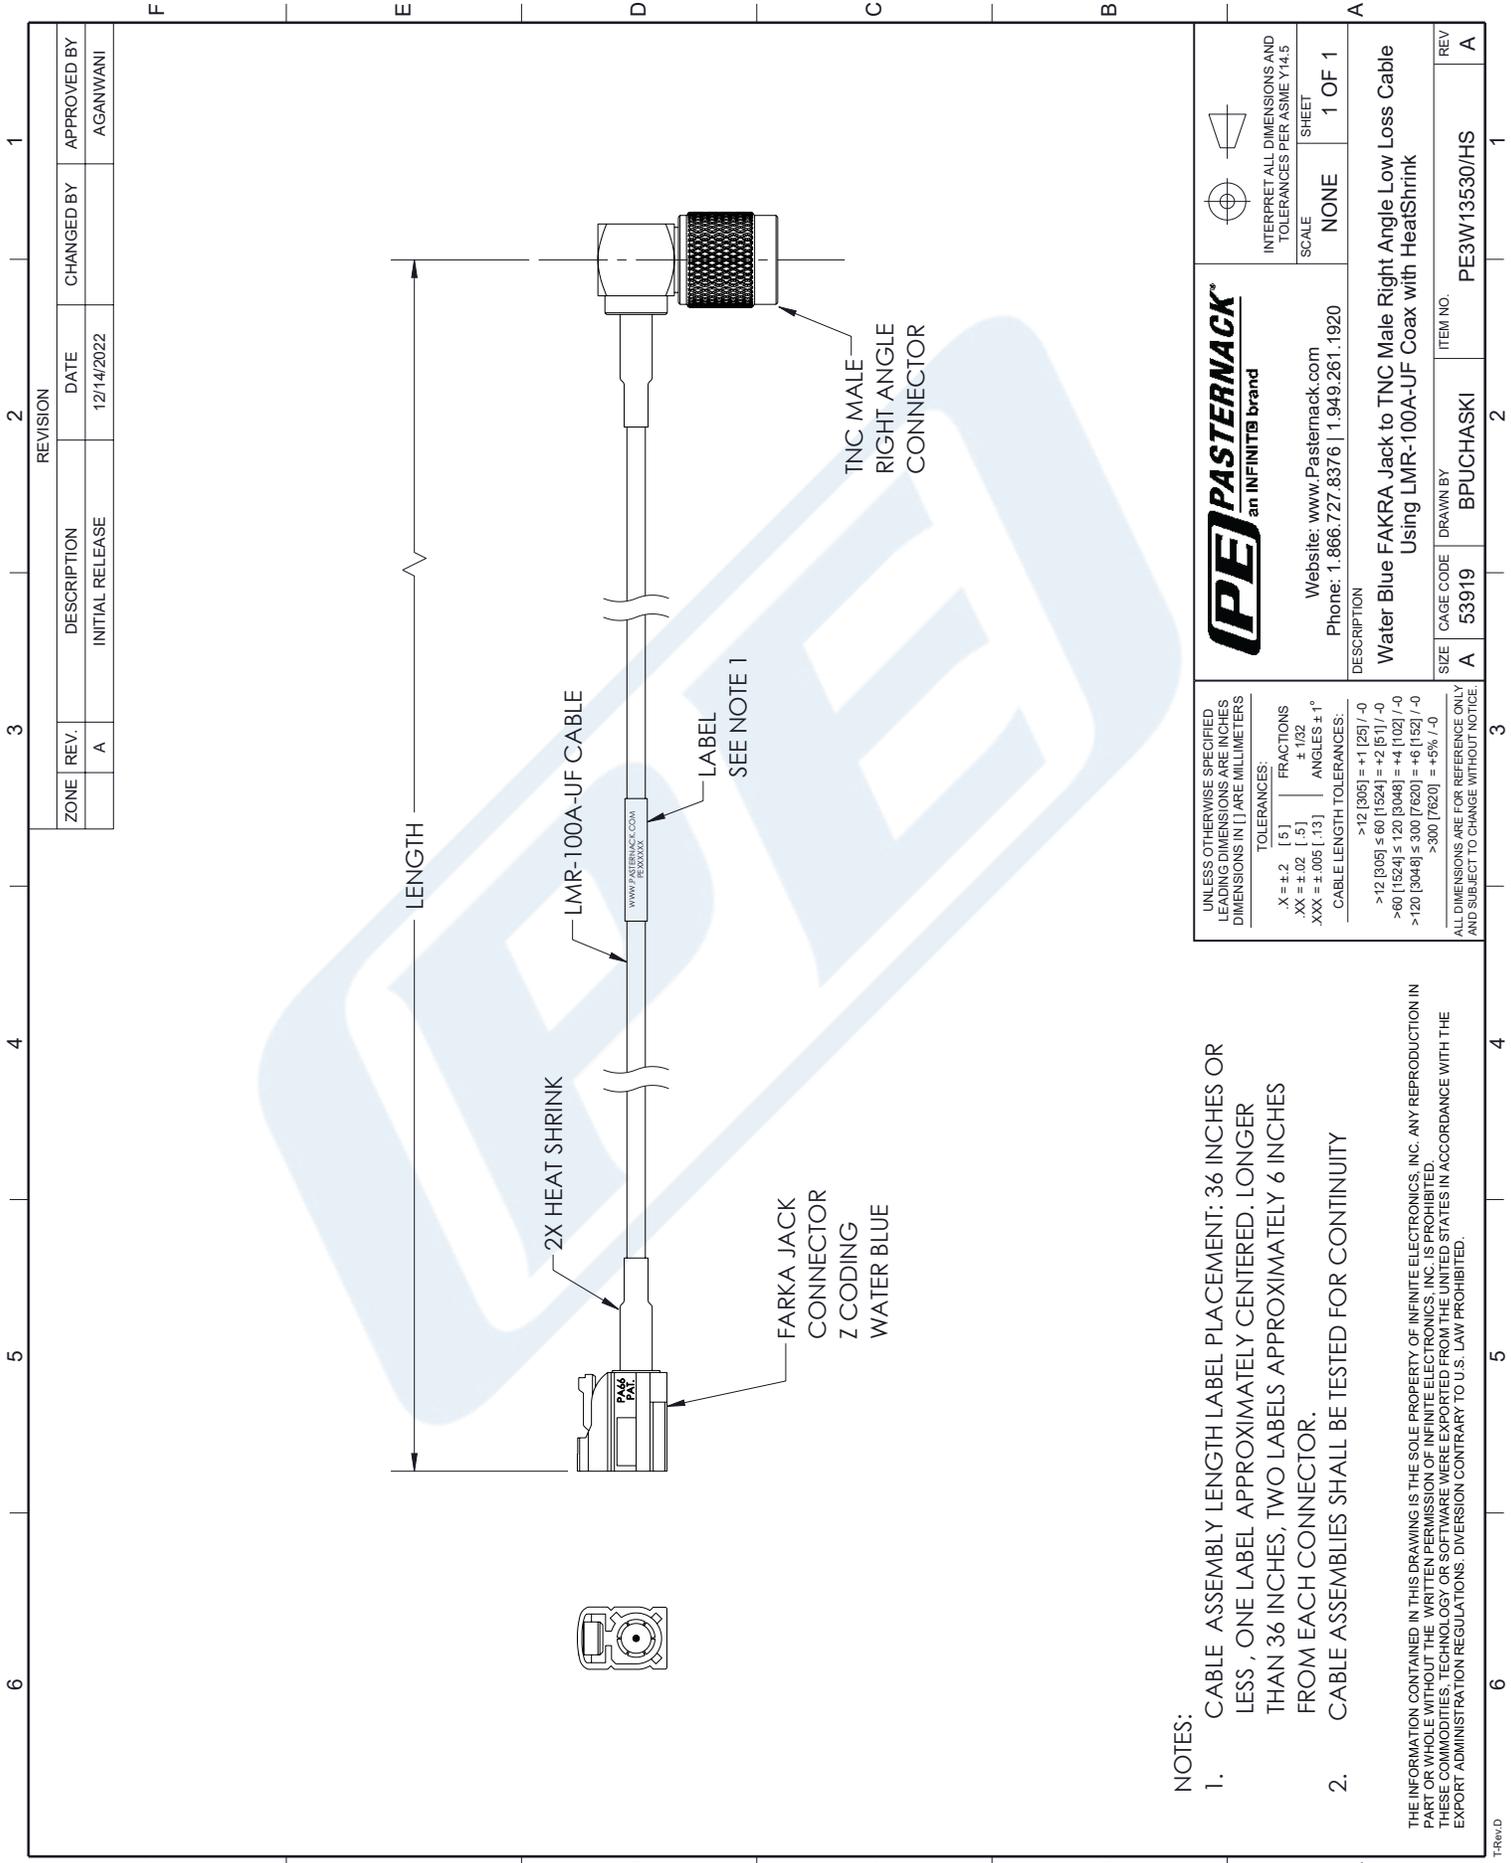

**NOTES:**

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS	
TOLERANCES:	FRACTIONS
.X = ±.2 [ .5 ]	± 1/32
.XX = ±.02 [ .5 ]	ANGLES ± 1°
.XXX = ±.005 [ .13 ]	CABLE LENGTH TOLERANCES:
	>12 [305] = +1 [25] / -0
	>60 [1524] = +2 [51] / -0
	>120 [3048] = +4 [102] / -0
	>300 [7620] = +6 [152] / -0
	>300 [7620] = +5% / -0
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.	

**PE PASTERNAK**  
an INFINITO brand

Website: [www.Pasternack.com](http://www.Pasternack.com)  
Phone: 1.866.727.8376 | 1.949.261.1920

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE

SHEET: 1 OF 1

---

DESCRIPTION  
**Water Blue FAKRA Jack to TNC Male Right Angle Low Loss Cable Using LMR-100A-UF Coax with HeatShrink**

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	53919	BPUCHASKI	PE3W13530/HS	A