

SMA Female Connector Clamp/Solder Attachment for RG188-DS, RG316-DS



RF Connectors Technical Data Sheet

PE4415

Configuration

- SMA Female Connector
- MIL-STD-348
- 50 Ohms

30 Offins

Gold Plated Contact

Features

Straight Body Geometry

Clamp/Solder Attachment

• RG188-DS, RG316-DS Interface Type

Contact plating according to MIL-G-45204

Applications

General Purpose Test

• Custom Cable Assemblies

Description

Pasternack's PE4415 SMA female connector with clamp/solder attachment for RG188-DS and RG316-DS is part of our full line of RF components available for same-day shipping.

Our SMA female connector PE4415 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Mechanical Specifications

Size

 Length
 0.875 in [22.23 mm]

 Width/Dia.
 0.312 in [7.92 mm]

 Weight
 0.013 lbs [5.9 g]

Material Specifications

Descriptio	n	Material	Plating
Contact			Gold MIL-G-45204
Insulation		PTFE	
Body		Brass	Gold MIL-G-45204

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp/Solder Attachment for RG188-DS, RG316-DS PE4415

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com



SMA Female Connector Clamp/Solder Attachment for RG188-DS, RG316-DS



RF Connectors Technical Data Sheet

PE4415

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:


SMA Female Connector Clamp/Solder Attachment for RG188-DS, RG316-DS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp/Solder Attachment for RG188-DS, RG316-DS PE4415

URL: https://www.pasternack.com/sma-female-standard-rg188-ds-rg316-ds-connector-pe4415-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

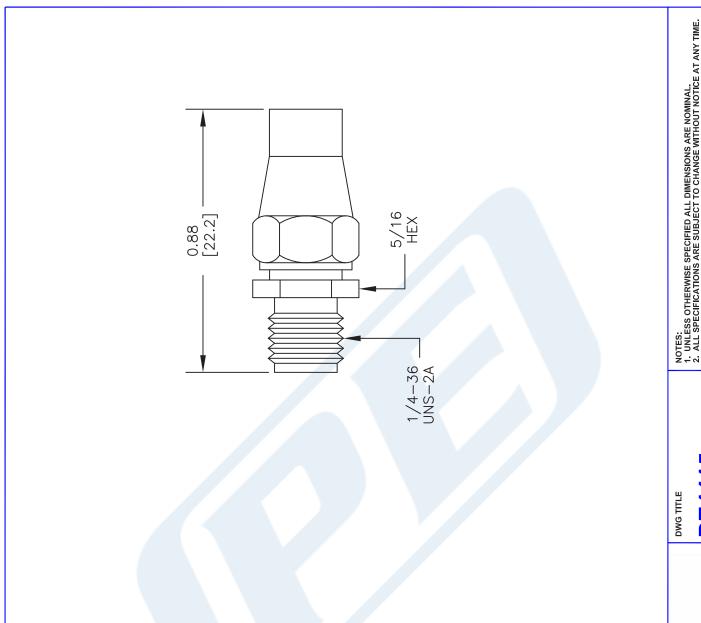

E SPECIFIED ALL DIMENSIONS. IS ARE SUBJECT TO CHANGE V. INCHES [mm]. EQUIVALENT CABLES. SCALE N/A	NOTES: 1. UNLESS OTHERWISE \$ 2. ALL SPECIFICATIONS 3. DIMENSIONS ARE IN IN 4. FITS MIL-C-17 AND EQ CAD FILE 0514	рыс тп.е РЕ4415 FSCM NO. 53919	шоз
	SPECIFIED ALL DIMENS ARE SUBJECT TO CHAINGHES [mm]. UIVALENT CABLES.	SS OTHERWISE SPECIFIED ALL D SPECIFICATIONS ARE SUBJECT T NSIONS ARE IN INCHES [mm]. MIL-C-17 AND EQUIVALENT CABLI D FILE 051402	415 M NO. 53919

2233

PASTERNACK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.co

© 2016 Pasternack Enterprises All Rights Reserved

0.22

3

 α

0.15

ASSEMBLY

SPLIT 2 PLACES

1. SLIDE CLAMP NUT (1) OVER CABLE. STRIP CABLE

ASSEMBLY PROCEDURES

 $_{\Omega}$

ASSEMBLY

AS SHOWN IN ASSEMBLY B. DO NOT NICK BRAID

WHEN CUTTING ONE SIDE OF JACKET.

REMOVE ONE SIDE OF JACKET TO END OF SLIT

CONDUCTOR. SLIT JACKET IN 2 PLACES &

AS SHOWN IN ASSEMBLY A. TIN CENTER

2. INSERT WEDGE ASSEMBLY (2) BETWEEN BRAID

& DIELECTRIC, CENTER CONDUCTOR MUST

ENTER HOLE IN INSULATOR.

3. INSERT CONTACT (3) IN INSULATOR & SOLDER CONTACT TO CENTER CONDUCTOR. INSERT

CABLE ASSEMBLY INTO BODY & TIGHTEN.