

9 dB Fixed Attenuator, SMA Male to SMA Female Brass Body Rated to 2 Watts From 0.009 MHz to 6 GHz



PE70A1013

Features

- 9 kHz to 6 GHz Frequency Range
- Attenuation 9±0.5 dB
- Max Power 2 Watts (CW)
- Return Loss < -20 dB

Applications

- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

Description

Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest in-stock varieties and ships them same day. The 9 dB Fixed Attenuator PE70A1013 is rated to 2 Watts and operates from 0.009 to 6 GHz. The versatile coaxial package uses SMA male to SMA female connectors and is also REACH and RoHS compliant.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	9KHz		6	GHz
Impedance		50		Ohms
Nominal Attenuation		9		dB
Attenuation Accuracy			±0.5	dB
VSWR		1.15:1	1.22:1	
Return Loss		-23	-20	dB
Input Power, CW			2	Watts

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	9KHz to 3	3 to 6				GHz
Attenuation Accuracy, Typ	0.15	0.25				dB
Attenuation Accuracy, Max	±0.3	±0.5				dB

Mechanical Specifications

Size

Length	1.216 in [30.89 mm]
Width/Diameter	0.366 in [9.3 mm]
Height	0 in [0 mm]
Weight	10.5 lbs [4.76 kg]
Body Material and Plating	Brass

9 dB Fixed Attenuator, SMA Male to SMA Female Brass
Body Rated to 2 Watts From 0.009 MHz to 6 GHz



PE70A1013

Configuration

Design	Fixed
Package Style	Connectorized Module

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Female
Hex Size	5/16 inch	

Environmental Specifications


Temperature

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:
Data measurements start from 9 kHz to 6 GHz

Typical Performance Data

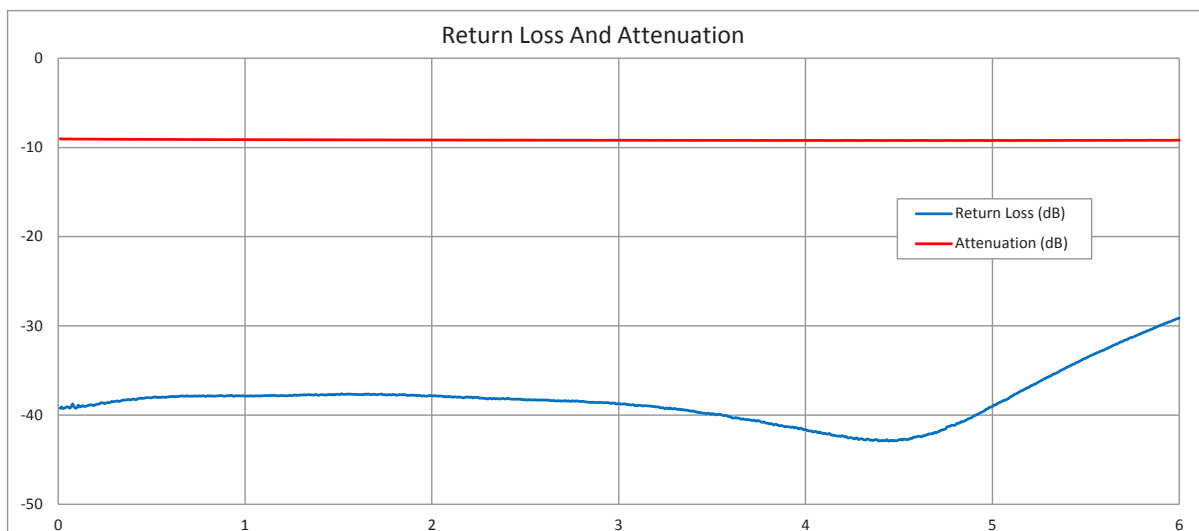

9 dB Fixed Attenuator, SMA Male to SMA Female Brass Body Rated to 2 Watts From 0.009 MHz to 6 GHz



PE70A1013

9 dB Fixed Attenuator, SMA Male to SMA Female Brass Body Rated to 2 Watts From 0.009 MHz to 6 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [9 dB Fixed Attenuator, SMA Male to SMA Female Brass Body Rated to 2 Watts From 0.009 MHz to 6 GHz PE70A1013](https://www.pasternack.com/9db-fixed-sma-male-sma-female-2-watts-attenuator-pe70a1013-p.aspx)

URL: <https://www.pasternack.com/9db-fixed-sma-male-sma-female-2-watts-attenuator-pe70a1013-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE70A1013 CAD Drawing

9 dB Fixed Attenuator, SMA Male to SMA Female Brass Body Rated to 2 Watts From 0.009 MHz to 6 GHz

