



SC Male to SC Female Adapter

RF Adapters Technical Data Sheet

PE9572

Configuration

- SC Male Connector 1
- SC Female Connector 2

- 50 Ohms
- Straight Body Geometry

Features

- SC Interface compliant with MIL-STD-348
- Silver Plated Beryllium Copper Contact
- Contact Plating per QQ-S-365

Applications

- Connector Saver
- General Purpose Test

Description

Pasternack's PE9572 SC male to SC female adapter is part of our full line of RF components available for same-day shipping. Our SC to SC adapter has a male to female gender configuration. The PE9572 Pasternack RF adapter can also be used as a connector saver to extend equipment life.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Mechanical Specifications

Size

Length	2.05 in [52.07 mm]
Width	0.8 in [20.32 mm]
Weight	0.143 lbs [64.86 g]

Description	Connector 1	Connector 2
Type	SC Male	SC Female
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-STD-348

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SC Male to SC Female Adapter PE9572](#)



SC Male to SC Female Adapter

RF Adapters Technical Data Sheet

PE9572

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	SC Male		SC Female	
Contact	Beryllium Copper	Silver QQ-S-365	Beryllium Copper	Silver QQ-S-365
Insulation	PTFE		PTFE	
Outer Conductor			Brass	Nickel QQ-N-290
Body	Brass	Nickel QQ-N-290		
Coupling Nut	Brass	Nickel QQ-N-290		

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:


SC Male to SC Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SC Male to SC Female Adapter PE9572](#)

URL: <https://www.pasternack.com/sc-male-sc-female-straight-adapter-pe9572-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9572 CAD Drawing
SC Male to SC Female Adapter

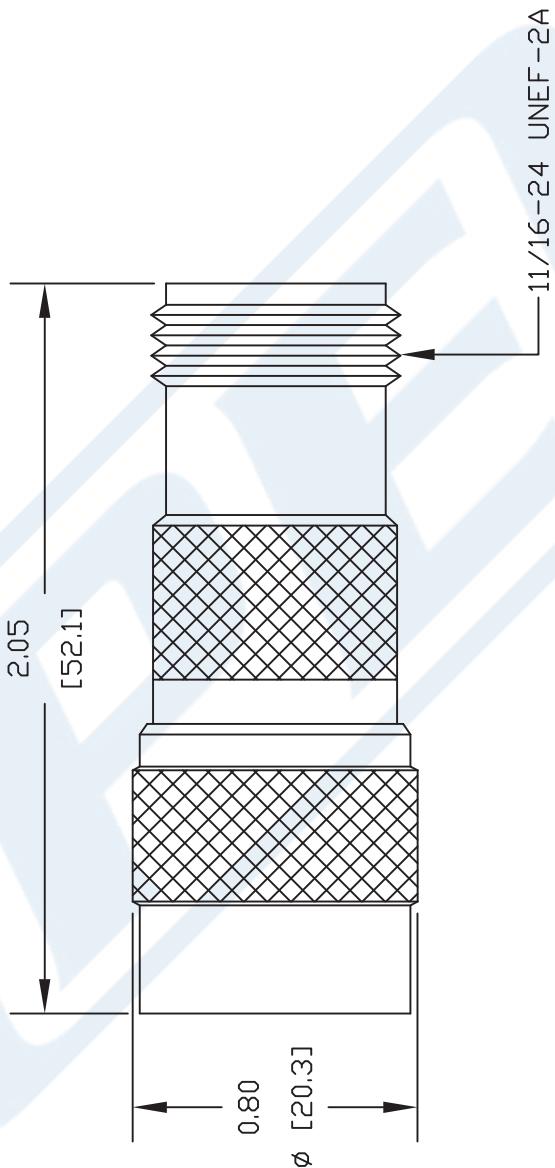

NOTES:					
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.					
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.					
3. DIMENSIONS ARE IN INCHES [mm].					
PASTERNACK ENTERPRISES, INC.	DWG TITLE	PE9572	CAD FILE	100202	SCALE N/A
P.O. BOX 16759, IRVINE, CA 92623 PHONE (949) 261-1920 FAX (949) 261-7451	REV. -	FSCM NO. 53919			SIZE A
WEB ADDRESS: www.pasternack.com E-MAIL ADDRESS: sales@pasternack.com					127
PASTERNACK ENTERPRISES® ESTABLISHED 1972					