

## SMA Male to SMB Jack Cable Using RG316-DS Coax with Double HeatShrink



### PE35568/HS2

#### Configuration

- Connector 1: SMA Male
- Connector 2: SMB Jack
- Cable Type: RG316-DS
- Coax Flex Type: Flexible

#### Features

- Max Frequency 3 GHz
- Shielding Effectivity > 85 dB
- 70% Phase Velocity
- Double Shielded
- FEP Jacket


#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE35568/HS2 SMA male to SMB jack cable using RG316-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMB cable assembly has a male to jack gender configuration with 50 ohm flexible RG316-DS coax. The PE35568/HS2 SMA male to SMB jack cable assembly operates to 3 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 85 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

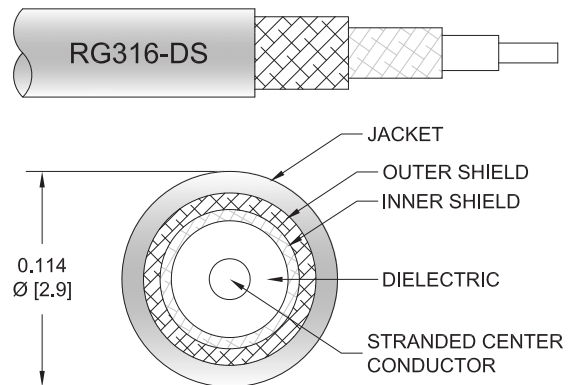

#### Electrical Specifications

| Description             | Minimum | Typical      | Maximum | Units        |
|-------------------------|---------|--------------|---------|--------------|
| Frequency Range         | DC      |              | 3       | GHz          |
| VSWR                    |         | 1.4:1        |         |              |
| Velocity of Propagation |         | 70           |         | %            |
| RF Shielding            | 85      |              |         | dB           |
| Capacitance             |         | 29.4 [96.46] |         | pF/ft [pF/m] |
| Operating Voltage (AC)  |         |              | 335     | Vrms         |

#### Specifications by Frequency

## SMA Male to SMB Jack Cable Using RG316-DS Coax with Double HeatShrink



### PE35568/HS2

| Part Number    | Length                   | Description           | F1   | F2   | F3    | F4   | F5    | Units | Weight (lbs) |
|----------------|--------------------------|-----------------------|------|------|-------|------|-------|-------|--------------|
|                |                          | Frequency             | 100  | 250  | 500   | 1000 | 3000  | MHz   |              |
| PE35568/HS2    | Custom Lengths Available | Insertion Loss (Typ.) | 0.08 | 0.13 | 0.194 | 0.29 | 0.535 | dB/ft |              |
|                |                          |                       | 0.27 | 0.42 | 0.64  | 0.96 | 1.76  | dB/m  |              |
| PE35568/HS2-6  | 6 inch                   | Insertion Loss (Typ.) | 0.25 | 0.27 | 0.3   | 0.35 | 0.47  | dB    | 0.026        |
| PE35568/HS2-12 | 12 inch                  | Insertion Loss (Typ.) | 0.29 | 0.33 | 0.4   | 0.49 | 0.74  | dB    | 0.033        |
| PE35568/HS2-24 | 24 inch                  | Insertion Loss (Typ.) | 0.37 | 0.46 | 0.59  | 0.78 | 1.27  | dB    | 0.048        |
| PE35568/HS2-36 | 36 inch                  | Insertion Loss (Typ.) | 0.45 | 0.59 | 0.79  | 1.07 | 1.81  | dB    | 0.062        |
| PE35568/HS2-48 | 48 inch                  | Insertion Loss (Typ.) | 0.53 | 0.72 | 0.98  | 1.36 | 2.34  | dB    | 0.076        |

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

|                             |                |
|-----------------------------|----------------|
| Loss due to Connector 1:    | 0.1 dB         |
| Loss due to Connector 2:    | 0.1 dB         |
| Base Weight:                | 0.033 pounds   |
| Additional Weight per Inch: | 0.00117 pounds |

## Mechanical Specifications

### Cable Assembly

|        |                     |
|--------|---------------------|
| Weight | 0.033 lbs [14.97 g] |
|--------|---------------------|

### Cable

|                                      |                            |
|--------------------------------------|----------------------------|
| Cable Type                           | RG316-DS                   |
| Impedance                            | 50 Ohms                    |
| Inner Conductor Type                 | Stranded                   |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver  |
| Dielectric Type                      | PTFE                       |
| Number of Shields                    | 2                          |
| Shield Layer 1                       | Silver Plated Copper Braid |
| Shield Layer 2                       | Silver Plated Copper Braid |
| Jacket Material                      | FEP, Tan                   |
| Jacket Diameter                      | 0.114 in [2.9 mm]          |
| One Time Minimum Bend Radius         | 0.59 in [14.99 mm]         |

## SMA Male to SMB Jack Cable Using RG316-DS Coax with Double HeatShrink



### PE35568/HS2

#### Connectors

| Description                        | Connector 1      | Connector 2     |
|------------------------------------|------------------|-----------------|
| Type                               | SMA Male         | SMB Jack        |
| Specification                      | MIL-STD-348A     |                 |
| Impedance                          | 50 Ohms          | 50 Ohms         |
| Configuration                      | Straight         | Straight        |
| Contact Material and Plating       | Brass, Gold      | Brass, Gold     |
| Contact Plating Specification      | 30 µin minimum   | 30 µin minimum  |
| Dielectric Type                    | PTFE             | PTFE            |
| Body Material and Plating          | Brass, Nickel    | Brass, Nickel   |
| Body Plating Specification         | 100 µin minimum  | 100 µin minimum |
| Coupling Nut Material and Plating  | Brass, Nickel    |                 |
| Coupling Nut Plating Specification | 100 µin minimum  |                 |
| Hex Size                           | 5/16 in          |                 |
| Torque                             | 5 in-lbs 0.57 Nm |                 |

#### Environmental Specifications

Operating Range Temperature -55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

## SMA Male to SMB Jack Cable Using RG316-DS Coax with Double HeatShrink



### PE35568/HS2

#### Typical Performance Data

#### How to Order

Part Number Configuration: **PE35568/HS2**    **- xx**    **uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example: PE35568/HS2-12 = 12 inches long cable  
PE35568/HS2-100cm = 100 cm long cable


SMA Male to SMB Jack Cable Using RG316-DS Coax with Double HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMB Jack Cable Using RG316-DS Coax with Double HeatShrink PE35568/HS2](#)

URL: <https://www.pasternack.com/sma-male-to-smb-jack-cable-using-rg316-ds-with-double-heatshrink-pe35568-hs2-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE35568/HS2 CAD Drawing
SMA Male to SMB Jack Cable Using RG316-DS Coax with Double HeatShrink

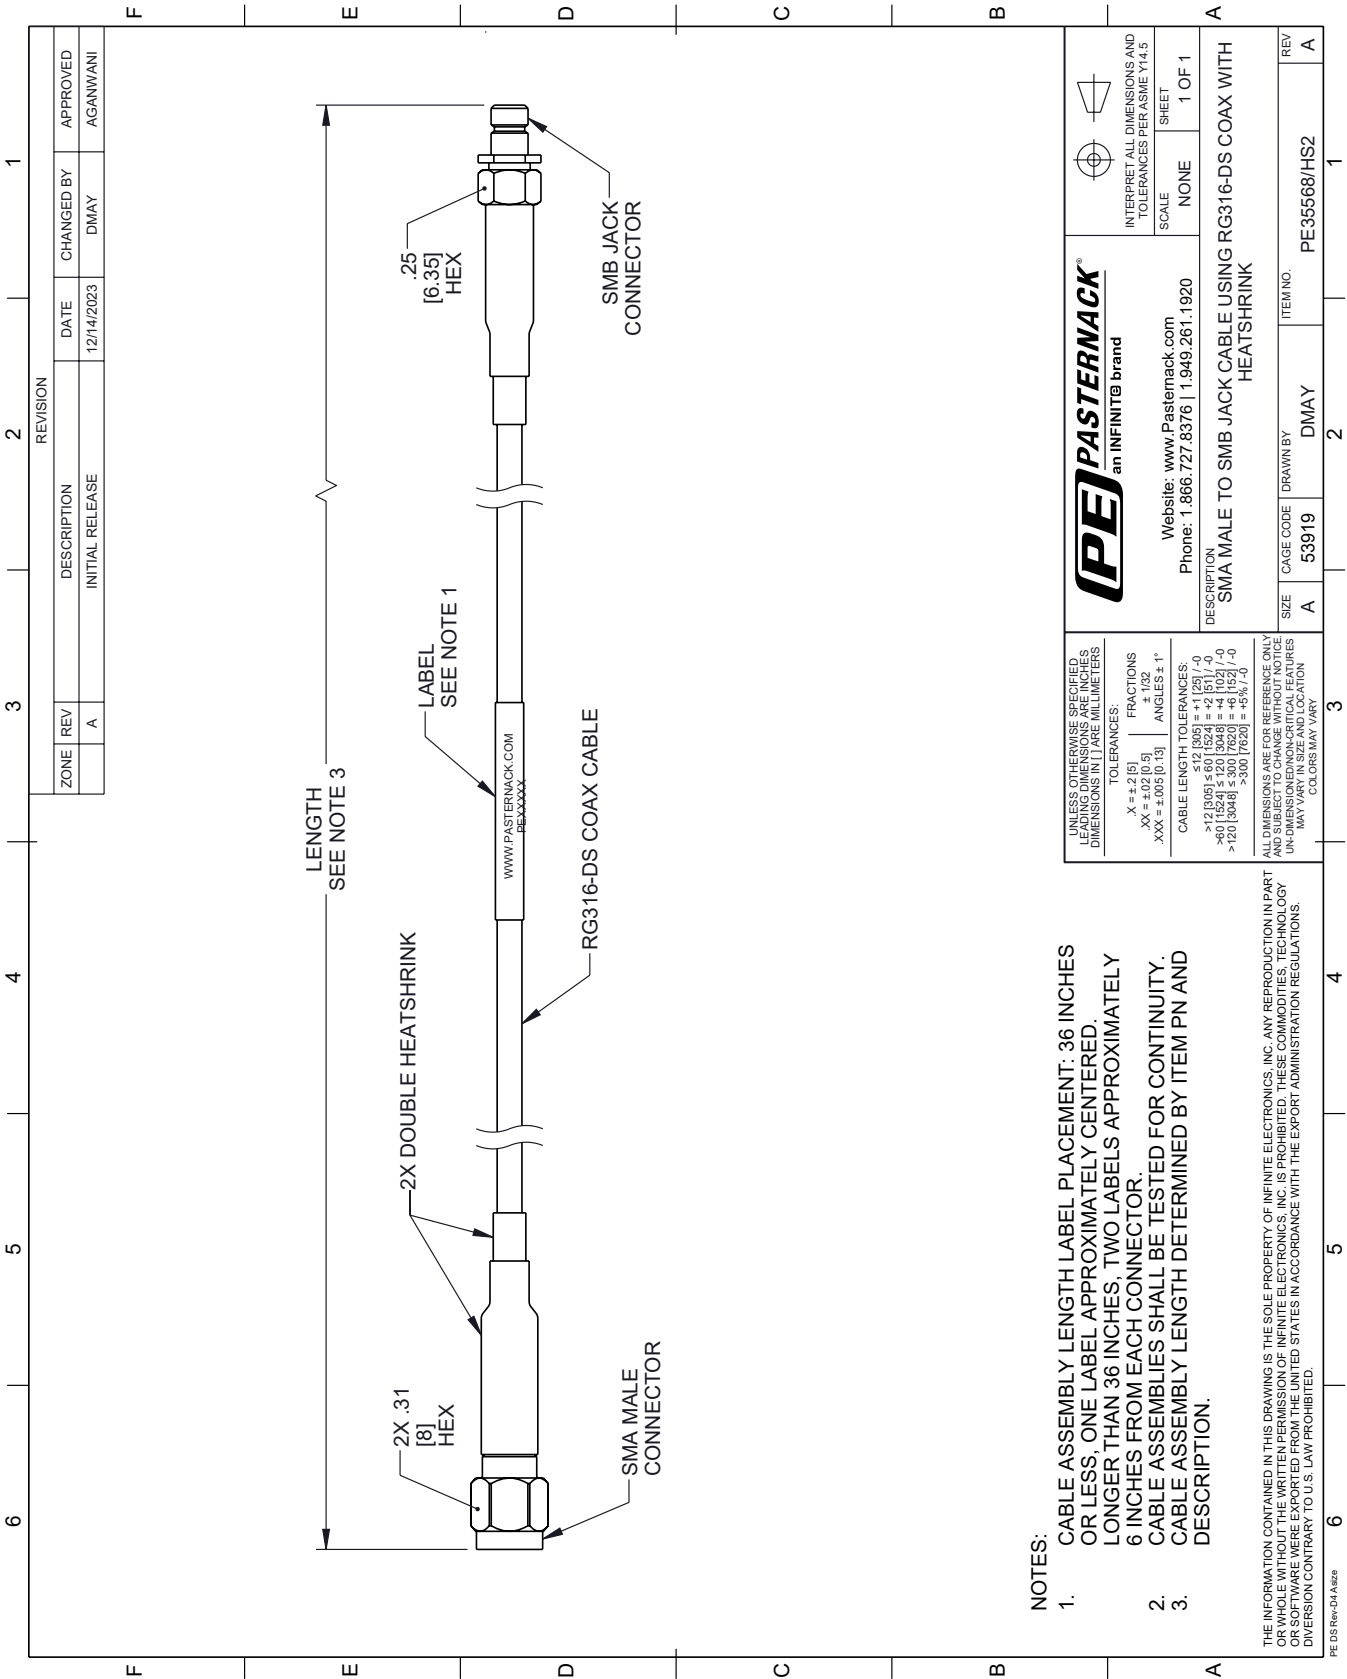

- NOTES:
- 1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
- 2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
- 3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.