

## 7/16 DIN Male to Straight Cut Lead Cable Using RG393 Coax





### PE3C0209

#### Configuration

- Connector 1: 7/16 DIN Male
- Connector 2: Straight Cut Lead
- Cable Type: RG393
- Coax Flex Type: Flexible

#### Features

- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket

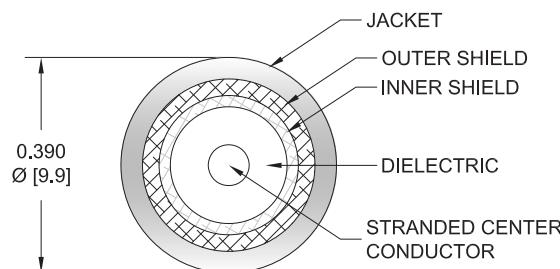

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C0209 50 ohm 7/16 DIN male to straight cut lead cable using RG393 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		69.5		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

#### Mechanical Specifications

##### Cable Assembly

Weight 0.387 lbs [175.54 g]

##### Cable

Cable Type RG393  
Impedance 50 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper, Silver  
Dielectric Type PTFE  
Number of Shields 2  
Shield Layer 1 Silver Plated Copper Braid

## 7/16 DIN Male to Straight Cut Lead Cable Using RG393 Coax

**PE3C0209**



Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.39 in [9.91 mm]
Repeated Minimum Bend Radius	3.9 in [99.06 mm]

### Connectors

Description	Connector 1	Connector 2
Type	7/16 DIN Male	Straight Cut Lead
Specification	IEC 169-4	
Impedance	50 Ohms	0 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	
Contact Plating Specification	30 $\mu$ in minimum	
Dielectric Type	PTFE	
Body Material and Plating	Brass, Nickel	
Body Plating Specification	100 $\mu$ in minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 $\mu$ in minimum	
Hex Size	32 mm	
Torque	18.417 ft-lbs 24.97 Nm	

### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)


### Plotted and Other Data

Notes:

## 7/16 DIN Male to Straight Cut Lead Cable Using RG393 Coax

**PE3C0209****Typical Performance Data****How to Order**

Part Number Configuration:

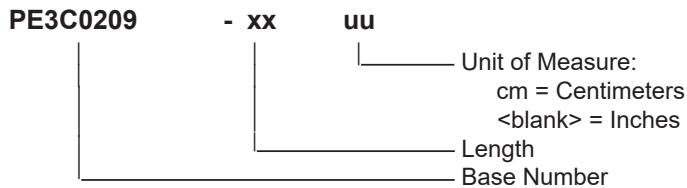

Example: PE3C0209-12 = 12 inches long cable  
PE3C0209-100cm = 100 cm long cable

7/16 DIN Male to Straight Cut Lead Cable Using RG393 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to Straight Cut Lead Cable Using RG393 Coax PE3C0209](#)

URL: <https://www.pasternack.com/7-16-din-male-to-straight-cut-lead-cable-using-rg393-pe3c0209-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C0209 CAD Drawing

## 7/16 DIN Male to Straight Cut Lead Cable Using RG393 Coax

