

MHV Male to MHV Male Cable Using RG58 Coax




PE3C0352

Configuration

- Connector 1: MHV Male
- Connector 2: MHV Male
- Cable Type: RG58
- Coax Flex Type: Flexible

Features

- Max Frequency 300 MHz
- Shielding Effectivity > 45 dB
- 65.9% Phase Velocity
- PVC (NC) Jacket

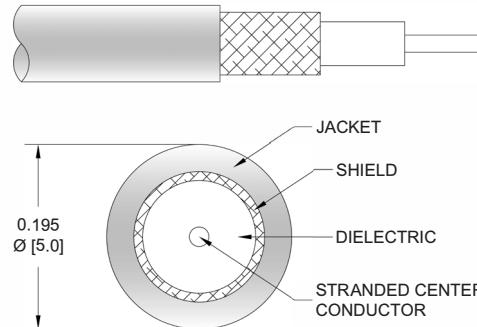

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C0352 MHV male to MHV male cable using RG58 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MHV to MHV cable assembly has a male to male gender configuration with 50 ohm flexible RG58 coax. The PE3C0352 MHV male to MHV male cable assembly operates to 300 MHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		300	GHz
VSWR			1.4:1	
Velocity of Propagation		65.9		%
RF Shielding	45			dB
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Operating Voltage (AC)			1,600	Vrms

Specifications by Frequency

MHV Male to MHV Male Cable Using RG58 Coax



PE3C0352

Part Number	Length	Description	F1	F2	F3	F4	Units	Weight (lbs)
		Frequency	50	100	250	300		
PE3C0352	Custom Lengths Available	Insertion Loss (Typ.)	0.029	0.049	0.074	0.082	dB/ft	
			0.1	0.17	0.25	0.27	dB/m	
PE3C0352-12	12 in	Insertion Loss (Typ.)	0.23	0.25	0.28	0.29	dB	0.13
PE3C0352-24	24 in	Insertion Loss (Typ.)	0.26	0.3	0.35	0.37	dB	0.154
PE3C0352-36	36 in	Insertion Loss (Typ.)	0.29	0.35	0.43	0.45	dB	0.178
PE3C0352-48	48 in	Insertion Loss (Typ.)	0.32	0.4	0.5	0.53	dB	0.202
PE3C0352-200CM	200 CM	Insertion Loss (Typ.)	0.4	0.53	0.69	0.74	dB	0.264

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
 Loss due to Connector 2: 0.1 dB
 Base Weight: 0.13 pounds
 Additional Weight per Inch: 0.002 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
 Weight 0.13 lbs [58.97 g]

Cable

Cable Type	RG58
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Tin
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC (NC), Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	2 in [50.8 mm]

MHV Male to MHV Male Cable Using RG58 Coax

PE3C0352



Connectors

Description	Connector 1	Connector 2
Type	MHV Male	MHV Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 μ in minimum	100 μ in minimum

Environmental Specifications

Operating Range Temperature

-40 to +80 deg C

Compliance Certifications

(see product page for current document)

Plotted and Other Data


Notes:

Values at 25°C, sea level.

MHV Male to MHV Male Cable Using RG58 Coax

**PE3C0352****Typical Performance Data****How to Order**

Part Number Configuration:

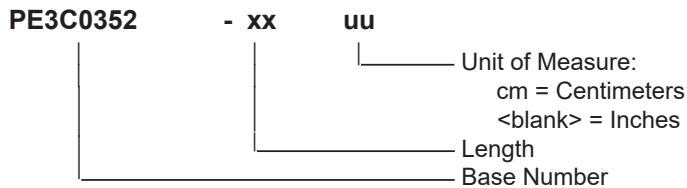

Example: PE3C0352-12 = 12 inches long cable
PE3C0352-100cm = 100 cm long cable

MHV Male to MHV Male Cable Using RG58 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MHV Male to MHV Male Cable Using RG58 Coax PE3C0352](#)

URL: <https://www.pasternack.com/mhv-male-to-mhv-male-cable-using-rg58-pe3c0352-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C0352 CAD Drawing

MHV Male to MHV Male Cable Using RG58 Coax

