

N Male Right Angle to N Male Right Angle Cable Using RG393 Coax




PE3C1442

Configuration

- Connector 1: N Male Right Angle
- Connector 2: N Male Right Angle
- Cable Type: RG393
- Coax Flex Type: Flexible

Features

- Max Frequency 10 GHz
- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket
- 500 Mating Cycles

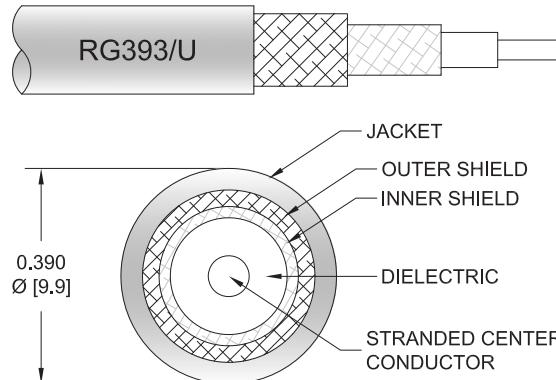

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C1442 type N male right angle to type N male right angle cable using RG393 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible RG393 coax. The PE3C1442 type N male to type N male cable assembly operates to 10 GHz. The right angle type N interfaces on the RG393 cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
VSWR			1.4:1	
Velocity of Propagation	69.5			%
Capacitance	29.4 [96.46]			pF/ft [pF/m]

Specifications by Frequency

N Male Right Angle to N Male Right Angle Cable Using RG393 Coax



PE3C1442

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	500	1000	2500	5000	10000	MHz	
PE3C1442	Custom Lengths Available	Insertion Loss (Typ.)	0.045	0.075	0.125	0.21	0.35	dB/ft	
			0.15	0.25	0.42	0.69	1.15	dB/m	
PE3C1442-12	12 inch	Insertion Loss (Typ.)	0.45	0.48	0.53	0.61	0.75	dB	0.433
PE3C1442-24	24 inch	Insertion Loss (Typ.)	0.49	0.55	0.65	0.82	1.1	dB	0.597
PE3C1442-36	36 inch	Insertion Loss (Typ.)	0.54	0.63	0.78	1.03	1.45	dB	0.76
PE3C1442-60	60 inch	Insertion Loss (Typ.)	0.63	0.78	1.03	1.45	2.15	dB	1.086
PE3C1442-72	72 inch	Insertion Loss (Typ.)	0.67	0.85	1.15	1.66	2.5	dB	1.249

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB
Loss due to Connector 2: 0.2 dB
Base Weight: 0.433 pounds
Additional Weight per Inch: 0.01359 pounds

Mechanical Specifications

Cable Assembly

Weight 0.433 lbs [196.41 g]

Cable

Cable Type RG393
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper, Silver
Dielectric Type PTFE
Number of Shields 2
Shield Layer 1 Silver Plated Copper Braid
Shield Layer 2 Silver Plated Copper Braid
Jacket Material FEP, Tan
Jacket Diameter 0.39 in [9.91 mm]
Repeated Minimum Bend Radius 3.9 in [99.06 mm]

N Male Right Angle to N Male Right Angle Cable Using RG393 Coax



PE3C1442

Connectors

Description	Connector 1	Connector 2
Type	N Male Right Angle	N Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Mating Cycles	500	500
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel

Environmental Specifications

Operating Range Temperature -55 to +165 deg C

Compliance Certifications

(see product page for current document)

Plotted and Other Data

Notes:

N Male Right Angle to N Male Right Angle Cable Using RG393 Coax




PE3C1442

Typical Performance Data

How to Order

Part Number Configuration:

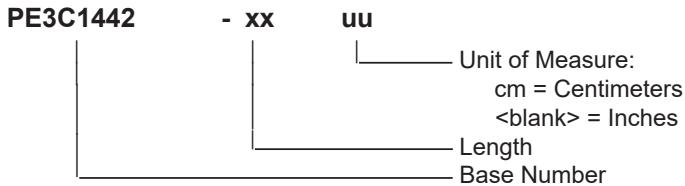

Example: PE3C1442-12 = 12 inches long cable
PE3C1442-100cm = 100 cm long cable

N Male Right Angle to N Male Right Angle Cable Using RG393 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Cable Using RG393 Coax PE3C1442](#)

URL: <https://www.pasternack.com/n-male-right-angle-to-n-male-cable-using-rg393-pe3c1442-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C1442 CAD Drawing

N Male Right Angle to N Male Right Angle Cable Using RG393 Coax

