

SMA Male to N Female Bulkhead Low Loss Cable Using LMR-240-UF Coax with HeatShrink, LF Solder




PE3C4347LF/HS

Configuration

- Connector 1: SMA Male
- Connector 2: N Female Bulkhead
- Cable Type: LMR-240-UF
- Coax Flex Type: Flexible

Features

- Max Frequency 8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- TPE Jacket
- 500 Mating Cycles

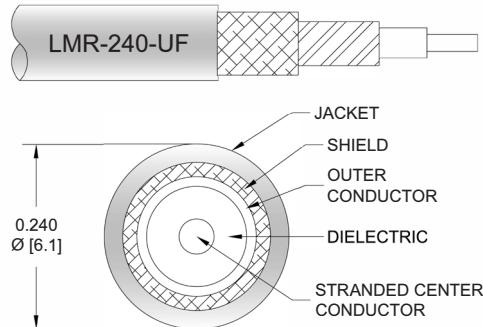

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C4347LF/HS SMA male to type N female bulkhead cable using LMR-240-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to type N cable assembly has a male to female gender configuration with 50 ohm flexible LMR-240-UF coax. The PE3C4347LF/HS SMA male to type N female cable assembly operates to 8 GHz. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.4:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		4.28 [14.04]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ohms/1000ft [Ohms/Km]
Operating Voltage (AC)			333	Vrms

SMA Male to N Female Bulkhead Low Loss Cable Using LMR-240-UF Coax with HeatShrink, LF Solder



PE3C4347LF/HS

Electrical Specifications

Description	Minimum	Typical				Maximum	Units
Dielectric Withstanding Voltage (AC)					1,000		Vrms
Jacket Spark					5,000		Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	500	1000	2000	4000	8000		
PE3C4347LF/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.066	0.096	0.138	0.155	0.244	dB/ft	
			0.22	0.32	0.46	0.51	0.81	dB/m	
PE3C4347LF/HS-12	12 inch	Insertion Loss (Typ.)	0.27	0.3	0.34	0.36	0.45	dB	0.135
PE3C4347LF/HS-24	24 inch	Insertion Loss (Typ.)	0.34	0.4	0.48	0.51	0.69	dB	0.168
PE3C4347LF/HS-36	36 inch	Insertion Loss (Typ.)	0.4	0.49	0.62	0.67	0.94	dB	0.2
PE3C4347LF/HS-60	60 inch	Insertion Loss (Typ.)	0.53	0.68	0.89	0.98	1.42	dB	0.264
PE3C4347LF/HS-300	300 inch	Insertion Loss (Typ.)	1.85	2.6	3.65	4.08	6.3	dB	0.904

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
Loss due to Connector 2: 0.1 dB
Base Weight: 0.135 pounds
Additional Weight per Inch: 0.00267 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
Weight 0.135 lbs [61.23 g]

Cable

Cable Type LMR-240-UF
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper
Dielectric Type PE (F)
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid
Jacket Material TPE, Black
Jacket Diameter 0.24 in [6.1 mm]
One Time Minimum Bend Radius 0.75 in [19.05 mm]
Repeated Minimum Bend Radius 2.5 in [63.5 mm]
Bending Moment 0.13 lbs-ft [0.18 N-m]
Flat Plate Crush 13 lbs/in [0.23 Kg/mm]
Tensile Strength 80 lbs [36.29 Kg]

SMA Male to N Female Bulkhead Low Loss Cable
Using LMR-240-UF Coax with HeatShrink, LF Solder



PE3C4347LF/HS

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	N Female Bulkhead
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	500	500
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification		30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Gold	
Hex Size	5/16 inch	
Torque	3 in-lbs 0.34 Nm	

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

SMA Male to N Female Bulkhead Low Loss Cable
Using LMR-240-UF Coax with HeatShrink, LF Solder




PE3C4347LF/HS

Typical Performance Data

How to Order

Part Number Configuration:

PE3C4347LF/HS - xx uu

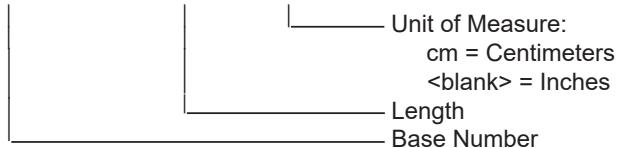

Example: PE3C4347LF/HS-12 = 12 inches long cable
PE3C4347LF/HS-100cm = 100 cm long cable

SMA Male to N Female Bulkhead Low Loss Cable Using LMR-240-UF Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Bulkhead Low Loss Cable Using LMR-240-UF Coax with HeatShrink, LF Solder PE3C4347LF/HS](#)

URL: <https://www.pasternack.com/sma-male-to-n-female-bulkhead-low-loss-cable-using-lmr-240-uf-with-heatshrink-lf-solder-pe3c4347lf-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C4347LF/HS CAD Drawing

SMA Male to N Female Bulkhead Low Loss Cable Using LMR-240-UF Coax with HeatShrink, LF Solder

