

FAKRA Jack Connector Crimp/Solder Attachment
 for RG174, RG316, RG188, .100 inch, PE-
 B100, PE-C100, LMR-100, Black Color



RF Connectors Technical Data Sheet

PE44646A

Configuration

- FAKRA Jack Connector
- 50 Ohms
- Straight Body Geometry
- RG174, RG316, RG188, .100 inch, PE-B100, PE-C100, LMR-100 Interface Type
- Crimp/Solder Attachment

Features

- Max. Operating Frequency 4 GHz
- Good VSWR of 1.3:1
- Gold Plated Phosphor Bronze Contact

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

Pasternack's PE44646A FAKRA jack connector with crimp/solder attachment for RG174, RG316, RG188, .100 inch, PE-B100, PE-C100 and LMR-100 is part of our full line of RF components available for same-day shipping. Our FAKRA jack connector operates up to a maximum frequency of 4 GHz and offers good VSWR of 1.3:1.

Our FAKRA jack connector PE44646A datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.3:1	
Operating Voltage (AC)			335	Vrms
Dielectric Withstanding Voltage (AC)			1,000	Vrms
Inner Conductor DC Resistance			6	mOhms
Outer Conductor DC Resistance			2.5	mOhms
Insulation Resistance	1,000			MOhms

Mechanical Specifications

Size

Length	0.038 in [0.97 mm]
Width/Dia.	0.37 in [9.40 mm]
Height	0.54 in [13.72 mm]
Weight	0.008 lbs [3.63 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [FAKRA Jack Connector Crimp/Solder Attachment for RG174, RG316, RG188, .100 inch, PE-B100, PE-C100, LMR-100, Black Color PE44646A](#)

FAKRA Jack Connector Crimp/Solder Attachment
 for RG174, RG316, RG188, .100 inch, PE-
 B100, PE-C100, LMR-100, Black Color



RF Connectors Technical Data Sheet

PE44646A

Material Specifications

Description	Material	Plating
Contact	Phosphor Bronze	Gold
Insulation	PTFE	
Outer Conductor	Brass	Nickel
Body	Plastic	

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

FAKRA Jack Connector Crimp/Solder Attachment for RG174, RG316, RG188, .100 inch, PE-B100, PE-C100, LMR-100, Black Color from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [FAKRA Jack Connector Crimp/Solder Attachment for RG174, RG316, RG188, .100 inch, PE-B100, PE-C100, LMR-100, Black Color PE44646A](#)

URL: <https://www.pasternack.com/fakra-jack-standard-pe-c100-rg174-rg316-connector-pe44646a-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE44646A CAD Drawing

FAKRA Jack Connector Crimp/Solder Attachment for RG174, RG316, RG188, .100 inch, PE-B100, PE-C100, LMR-100, Black Color

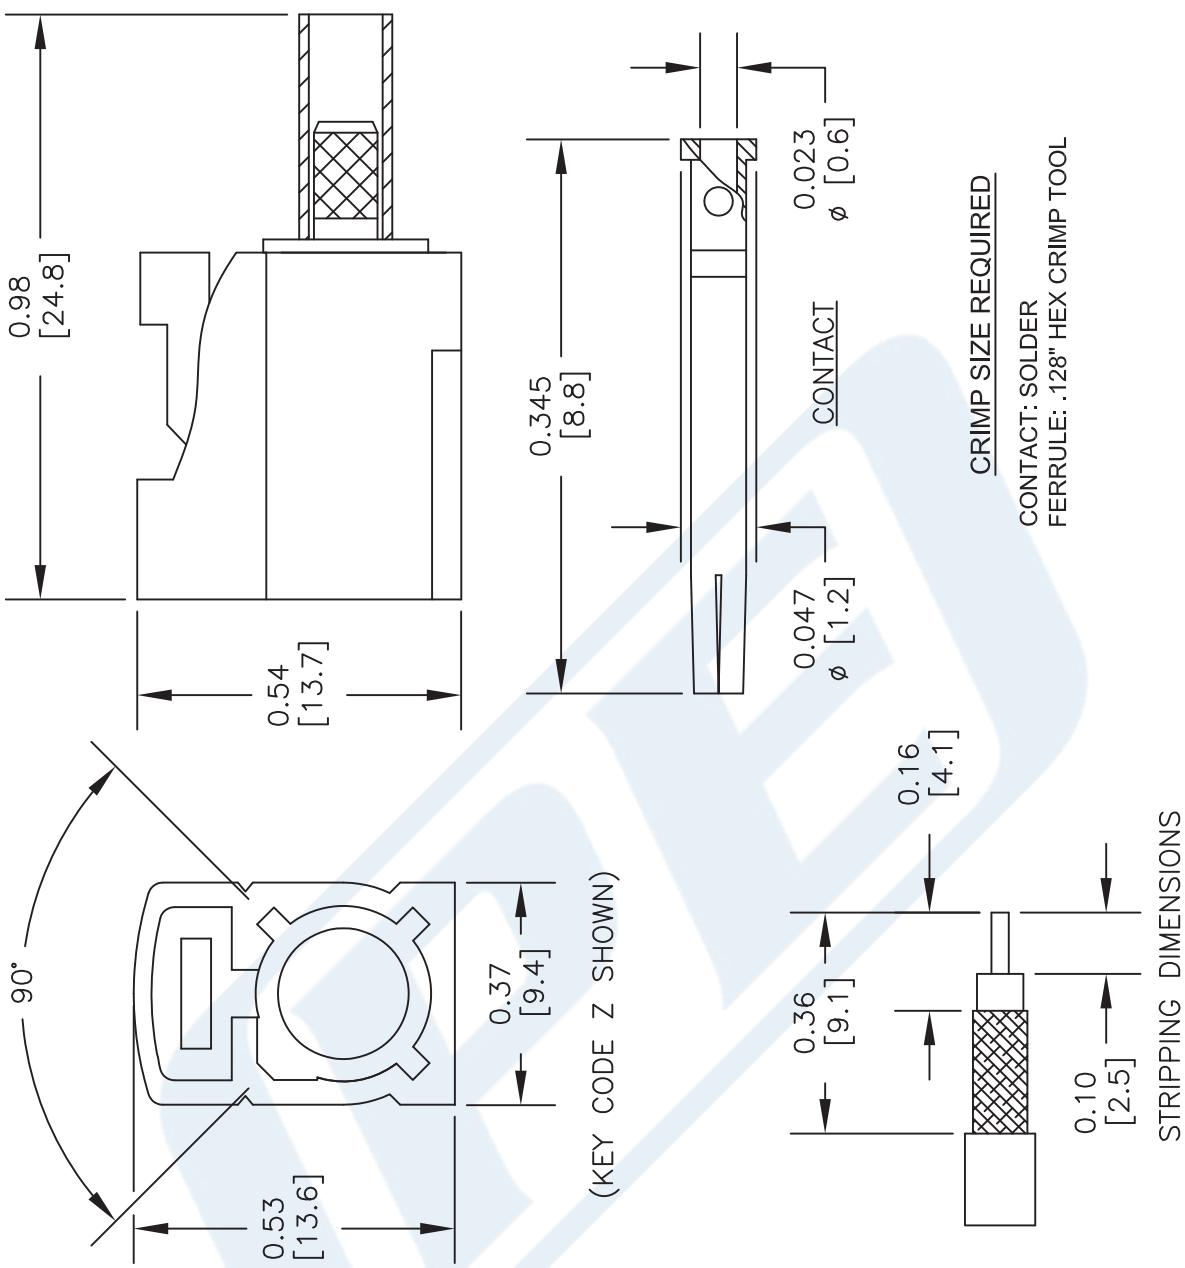

PASTERNAK
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

PE44646/Y

DWG TITLE
PE44646/Y
CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL
CRIMP SIZE REQUIRED
0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

0.36
[9.1]

0.10
[2.5]

0.16
[4.1]

CONTACT
0.023
φ [0.6]

CRIMP SIZE REQUIRED

CONTACT: SOLDER
FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023
φ [0.6]

0.047
φ [1.2]

0.345
[8.8]

0.37
[9.4]

SMB Plug Right Angle Connector Crimp/Solder Attachment for RG174, RG316, RG188, LMR-100, PE-B100, PE-C100, 0.100 inch



RF Connectors Technical Data Sheet

PE4052

Configuration

- SMB Plug Connector
- MIL-STD-348A
- 50 Ohms
- Right Angle Body Geometry
- RG174, RG316, RG188, LMR-100, PE-B100, PE-C100, .100 inch Interface Type
- Crimp/Solder Attachment

Features

- Max. Operating Frequency 4 GHz
- Good VSWR of 1.3:1
- Gold Plated Beryllium Copper Contact
- 30 μ in minimum contact plating

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

Pasternack's PE4052 SMB plug right angle connector with crimp/solder attachment for RG174, RG316, RG188, LMR-100, PE-B100, PE-C100 and .100 inch is part of our full line of RF components available for same-day shipping. Our SMB plug connector operates up to a maximum frequency of 4 GHz and offers good VSWR of 1.3:1. Its right angle body geometry allows for easier connections in tight spaces.

Our SMB plug right angle connector PE4052 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.3:1	
Operating Voltage (AC)			250	Vrms

Mechanical Specifications

Size	
Length	0.622 in [15.8 mm]
Width/Dia.	0.256 in [6.50 mm]
Height	0.528 in [13.41 mm]
Weight	0.012 lbs [5.44 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug Right Angle Connector Crimp/Solder Attachment for RG174, RG316, RG188, LMR-100, PE-B100, PE-C100, 0.100 inch PE4052](#)

SMB Plug Right Angle Connector Crimp/Solder Attachment for RG174, RG316, RG188, LMR-100, PE-B100, PE-C100, 0.100 inch



RF Connectors Technical Data Sheet

PE4052

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold 30 μ in minimum
Insulation	PTFE	
Outer Conductor	Brass	Nickel 100 μ in minimum
Body	Brass	Nickel 100 μ in minimum

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

SMB Plug Right Angle Connector Crimp/Solder Attachment for RG174, RG316, RG188, LMR-100, PE-B100, PE-C100, 0.100 inch from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug Right Angle Connector Crimp/Solder Attachment for RG174, RG316, RG188, LMR-100, PE-B100, PE-C100, 0.100 inch PE4052](#)

URL: <https://www.pasternack.com/smb-plug-standard-rg174-rg316-rg188-connector-pe4052-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE4052 CAD Drawing

SMB Plug Right Angle Connector Crimp/Solder Attachment for RG174,
RG316, RG188, LMR-100, PE-B100, PE-C100, 0.100 inch

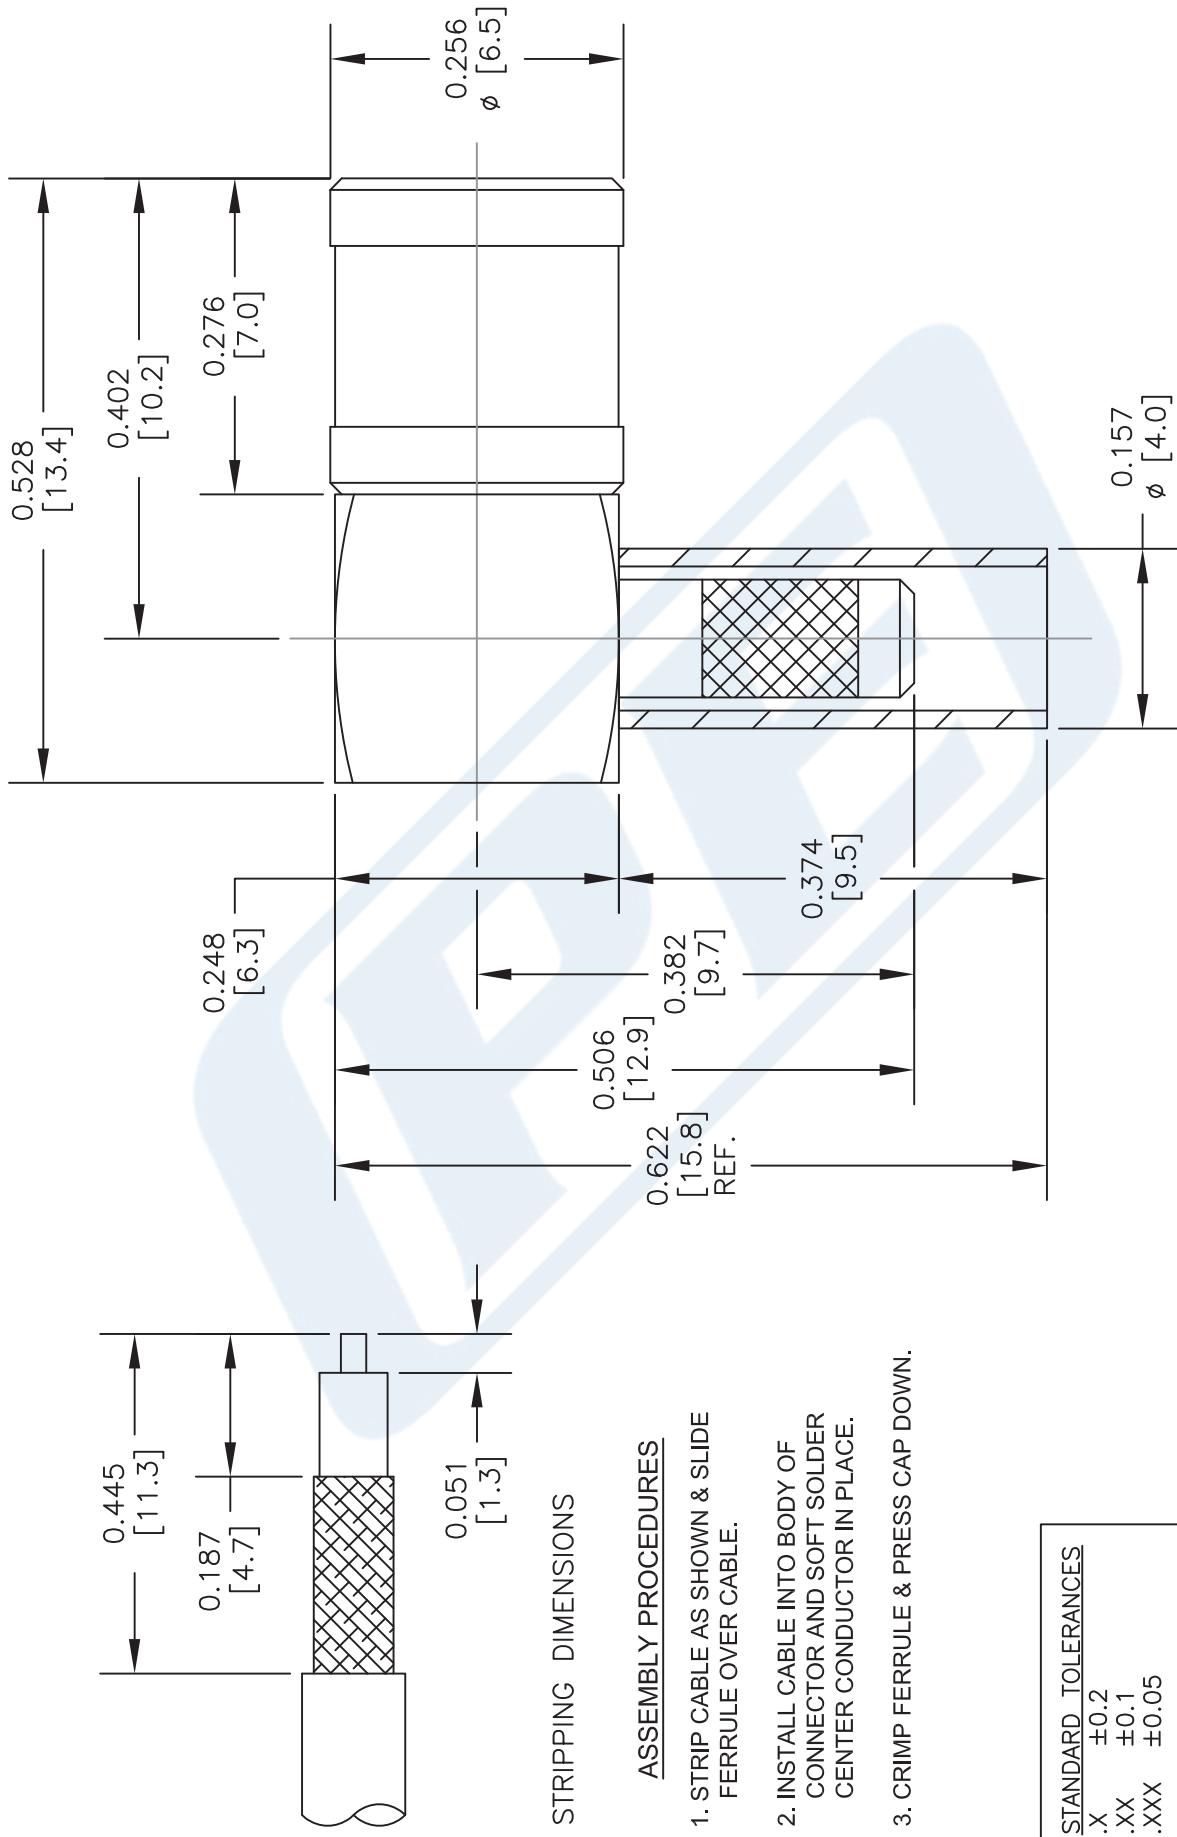

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	PE4052	CAGE CODE	53919	CAD FILE	051517	SCALE	N/A	SIZE	A	2233
PASTERNACK® THE ENGINEER'S RF SOURCE	Pasternack Enterprises, Inc. P.O. Box 16759 Irvine CA 92623 Phone: (949) 261-1920 Fax: (949) 261-7451 Website: www.pasternack.com E-Mail: sales@pasternack.com									



Flexible RG174 Coax Cable Single Shielded with Black PVC Jacket

RF Cables Technical Data Sheet

RG174A/U

Times Microwave Systems Coax Cable Specification

Configuration

- Flexible Cable
- 1 Shield(s)

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
Impedance		50		Ohms
Velocity of Propagation		66		%
Nominal Capacitance		31.08 [101.97]		pF/ft [pF/m]

Performance by Frequency Band

Description	F1	F2	F3	F4	F5	Units
Frequency	100	400	1,000			MHz
Attenuation, Typ	8.4 27.56	19 62.34	32 104.99			dB/100ft dB/100m

Mechanical Specifications

Diameter	0.11 in [2.79 mm]
Weight	0.008 lbs/ft [0.01 kg/m]

Construction Specifications

Description	Material and Plating	Diameter
Inner Conductor	Copper Clad Steel, 7 Strands	0.019 in [0.48 mm]
Conductor Type	Stranded	
Dielectric	PE	0.06 in [1.52 mm]
First Shield	Tinned Copper Braid	0.078 in [1.98 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Flexible RG174 Coax Cable Single Shielded with Black PVC Jacket RG174A/U](#)



Flexible RG174 Coax Cable Single Shielded with Black PVC Jacket

RF Cables Technical Data Sheet

RG174A/U

Jacket	PVC, Black	0.11 in [2.79 mm]
--------	------------	-------------------

Environmental Specifications

Temperature

Operating Range

-40 to +80 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Flexible RG174 Coax Cable Single Shielded with Black PVC Jacket from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Flexible RG174 Coax Cable Single Shielded with Black PVC Jacket RG174A/U](#)

URL: <https://www.pasternack.com/flexible-0.100-rg174-50-ohm-coax-cable-pvc-jacket-rg174a-u-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

RG174A/U CAD Drawing

Flexible RG174 Coax Cable Single Shielded with Black PVC Jacket

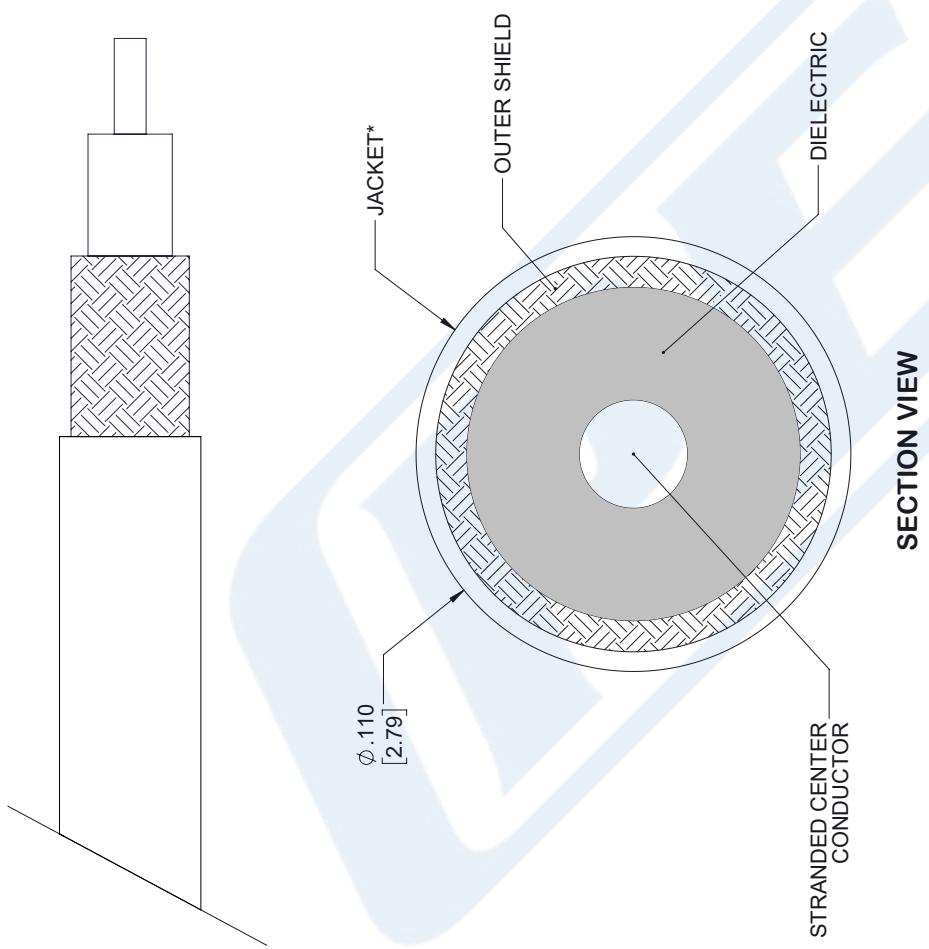

STANDARD TOLERANCES	
.X	± 0.2
.XX	± 0.01
.XXX	± 0.005

NOTE:
*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

NOTES:	
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.	
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.	
3. DIMENSIONS ARE IN INCHES [mm].	
DWG TITLE	RG174A/U
CAGE CODE	53919
CAD FILE	052518
SCALE	N/A
SIZE	A
	7361

PASTERNACK [®] THE ENGINEER'S RESOURCE	
Pasterнак Enterprises, Inc.	
P.O. Box 16759	Irvine CA 92623
Phone: (949) 261-1920	Fax: (949) 261-7451
Website: www.pasterнак.com	E-Mail: sales@pasterнак.com