

Plenum SMA Male Right Angle to NEX10 Male
Low PIM Cable 150 cm Length Using SPP-250-LLPL
Coax Using Times Microwave Parts



PE3C6259-150CM


Configuration

- Connector 1: SMA Male Right Angle TC-SPP250-SM-RA-LP
- Connector 2: NEX10 Male TC-250-NX10M-LP
- Cable Type: SPP-250-LLPL
- Coax Flex Type: Corrugated



Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 100 dB
- 76% Phase Velocity
- FEP Jacket
- 100% Tested with PIM Test Results Marked on Cable
- UL910 Plenum Rated Cable
- Lightweight and Extremely Flexible
- Low Loss with Excellent VSWR
- IP67 (when mated)
- Using Times Microwave Components

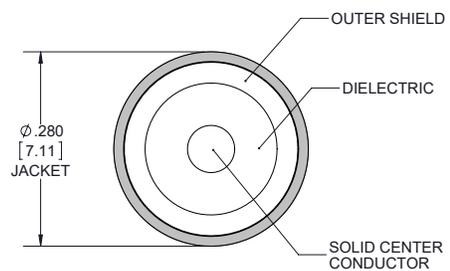

Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Distributed Antenna Systems (DAS)
- Plenum Installations
- Multi-Carrier Communication Systems
- PIM Testing

Description

Pasternack's PE3C6259-150CM SMA male right angle to NEX10 male 150 cm cable using SPP-250-LLPL coax is part of our full line of RF components available for same-day shipping. Pasternack's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. This Pasternack SMA to NEX10 cable assembly has a male to male gender configuration with 50 ohm corrugated SPP-250-LLPL coax. The PE3C6259-150CM SMA male to NEX10 male cable assembly operates to 5.8 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The right angle SMA interface on the SPP-250-LLPL cable allows for easier connections in tight spaces. Times Microwave cable is used in each assembly and TMS components are used to form connections with the super flexible low PIM cable. These cable assemblies are expertly built to satisfy your specific need with high quality Times Microwave Systems manufactured parts.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|---------|---------|-------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 76 | | % |

Plenum SMA Male Right Angle to NEX10 Male
Low PIM Cable 150 cm Length Using SPP-250-LLPL
Coax Using Times Microwave Parts



PE3C6259-150CM

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|---|---------|--------------|---------|-----------------------|
| RF Shielding | 100 | | | dB |
| Passive Intermodulation IM3 (2x43dBm Tones) at 850 MHz or 1900 MHz | | -165 | -160 | dBc |
| Capacitance | | 27 [88.58] | | pF/ft [pF/m] |
| Inductance | | 0.067 [0.22] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 3 [9.84] | | Ohms/1000ft [Ohms/Km] |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency | 0.45 | 0.7 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Max.) | 0.37 | 0.46 | 0.54 | 0.87 | 1.35 | dB |

Electrical Specification Notes:

PIM test results vary between cables

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of $0.15 \cdot \sqrt{FGHz}$ dB for the right angle connector and $0.1 \cdot \sqrt{FGHz}$ dB for the straight connector.

Mechanical Specifications

Cable Assembly

Weight 0.42 lbs [190.51 g]

Cable

Cable Type SPP-250-LLPL
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper
 Dielectric Type PTFE
 Number of Shields 1
 Shield Layer 1 Helically Corrugated Copper Tube
 Outer Conductor 1 Material and Plating Copper
 Outer Conductor Diameter 0.25 in [6.35 mm]
 Jacket Material FEP, Blue
 Jacket Diameter 0.28 in [7.11 mm]
 One Time Minimum Bend Radius 1.25 in [31.75 mm]
 Bending Moment 0.8 lbs-ft [1.08 N-m]

Plenum SMA Male Right Angle to NEX10 Male
Low PIM Cable 150 cm Length Using SPP-250-LLPL
Coax Using Times Microwave Parts



PE3C6259-150CM

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|-------------------------|---------------------|
| Type | SMA Male Right Angle | NEX10 Male |
| Impedance | 50 Ohms | 50 Ohms |
| Configuration | Right Angle | Straight |
| Mating Cycles | | 500 |
| Contact Material and Plating | Phosphor Bronze, Silver | Brass, Silver |
| Contact Plating Specification | 196µ in | 100 µin |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Body Plating Specification | 118µ in | 100 µin |
| Coupling Nut Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Coupling Nut Plating Specification | 118µ in | 100 µin |
| Torque | 10 in-lbs 1.13 Nm | 13.28 in-lbs 1.5 Nm |

Environmental Specifications

| | |
|-----------------------------|-------------------|
| Operating Range Temperature | -55 to +200 deg C |
| Storage Range Temperature | -55 to +200 deg C |
| Plenum Rating | UL910 |

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:
Values at 25°C, sea level.

Plenum SMA Male Right Angle to NEX10 Male
Low PIM Cable 150 cm Length Using SPP-250-LLPL
Coax Using Times Microwave Parts



PE3C6259-150CM

Typical Performance Data




Plenum SMA Male Right Angle to NEX10 Male
Low PIM Cable 150 cm Length Using SPP-250-LLPL
Coax Using Times Microwave Parts



PE3C6259-150CM

How to Order

Part Number Configuration:

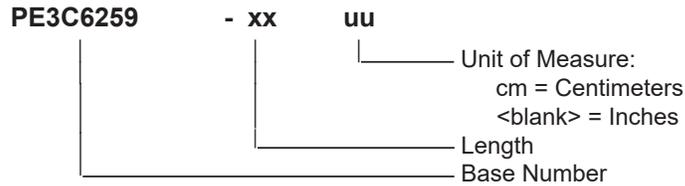

Example: PE3C6259-12 = 12 inches long cable
PE3C6259-100cm = 100 cm long cable

Plenum SMA Male Right Angle to NEX10 Male Low PIM Cable 150 cm Length Using SPP-250-LLPL Coax Using Times Microwave Parts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum SMA Male Right Angle to NEX10 Male Low PIM Cable 150 cm Length Using SPP-250-LLPL Coax Using Times Microwave Parts PE3C6259-150CM](#)

URL: <https://www.pasternack.com/sma-male-nex10-male-spp250llpl-cable-assembly-pe3c6259-150cm-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C6259-150CM CAD Drawing

Plenum SMA Male Right Angle to NEX10 Male Low PIM Cable 150 cm Length
Using SPP-250-LLPL Coax Using Times Microwave Parts

