



SMA Female Connector Clamp/Solder Attachment for RG316,
 RG174, RG188, PE-B100, PE-C100, 0.100 inch, LMR-100

RF Connectors Technical Data Sheet

PE4030

Configuration

- SMA Female Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry
- RG316, RG174, RG188, PE-B100, PE-C100, 0.100 inch, LMR-100 Interface Type
- Clamp/Solder Attachment

Features

- Gold Plated Contact
- Contact plating according to MIL-G-45204

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

Pasternack's PE4030 SMA female connector with clamp/solder attachment for RG316, RG174, RG188, PE-B100, PE-C100, 0.100 inch and LMR-100 is part of our full line of RF components available for same-day shipping.

Our SMA female connector PE4030 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Mechanical Specifications

Size

Length

0.875 in [22.23 mm]

Width/Dia.

0.312 in [7.92 mm]

Weight

0.013 lbs [5.9 g]

Material Specifications

Description	Material	Plating
Contact		Gold MIL-G-45204
Insulation	PTFE	
Body	Brass	Nickel QQ-N-290

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Connector Clamp/Solder Attachment for RG316, RG174, RG188, PE-B100, PE-C100, 0.100 inch, LMR-100 PE4030](#)



SMA Female Connector Clamp/Solder Attachment for RG316,
RG174, RG188, PE-B100, PE-C100, 0.100 inch, LMR-100

RF Connectors Technical Data Sheet

PE4030

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

SMA Female Connector Clamp/Solder Attachment for RG316, RG174, RG188, PE-B100, PE-C100, 0.100 inch, LMR-100 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Connector Clamp/Solder Attachment for RG316, RG174, RG188, PE-B100, PE-C100, 0.100 inch, LMR-100 PE4030](#)

URL: <https://www.pasternack.com/sma-female-standard-rg316-rg174-rg188-connector-pe4030-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE4030 CAD Drawing

SMA Female Connector Clamp/Solder Attachment for RG316,
RG174, RG188, PE-B100, PE-C100, 0.100 inch, LMR-100

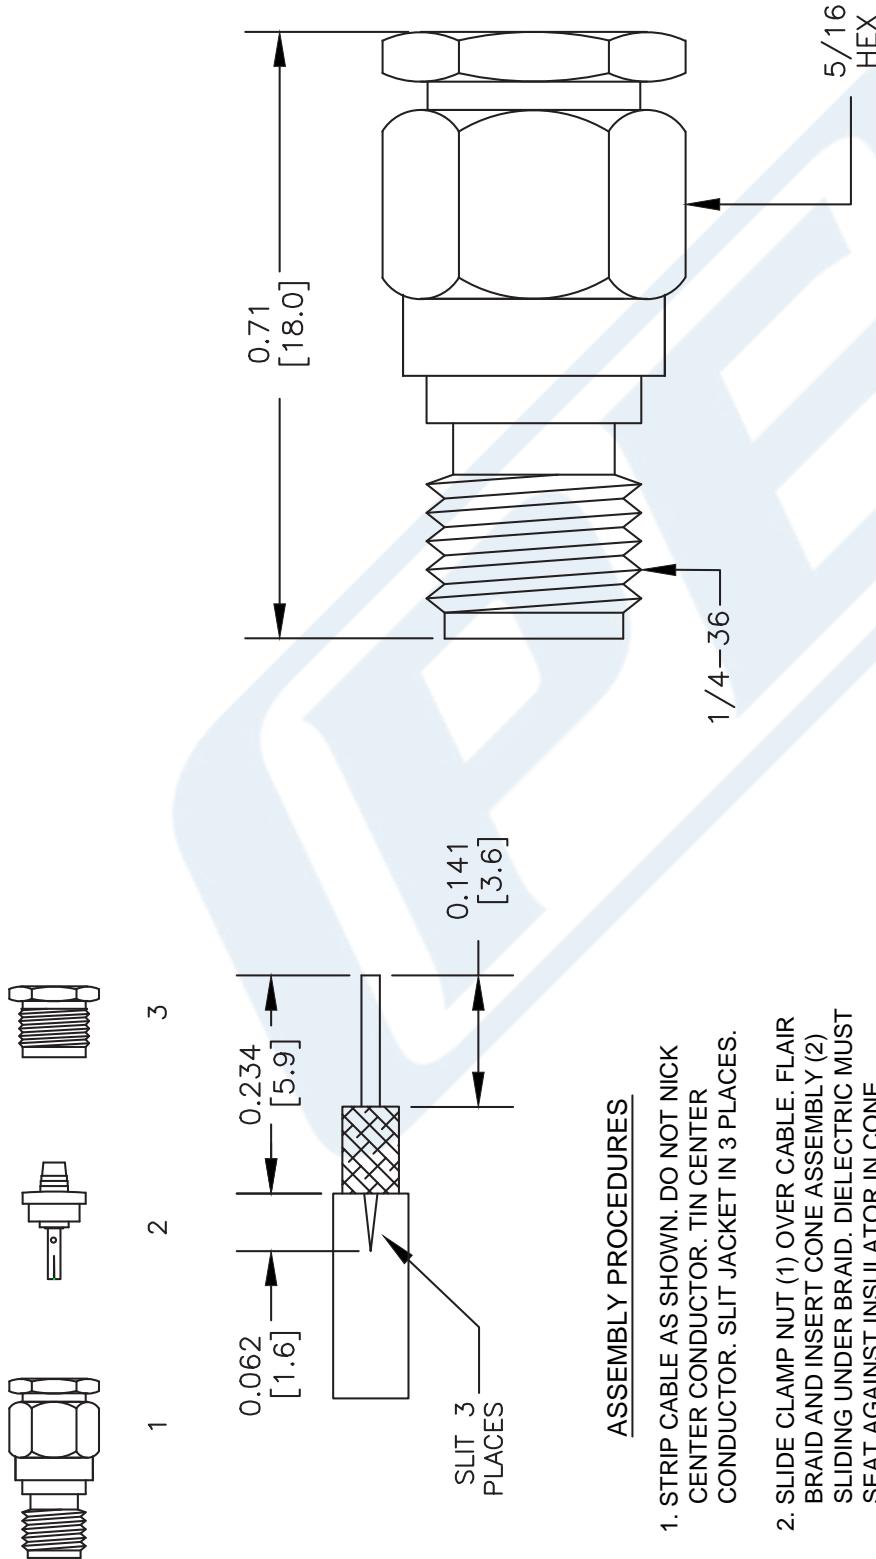

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES (mm).
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

PASTERNACK	DWG TITLE
PE	PE4030
Pasternack Enterprises, Inc. P.O. Box 16759 Irvine CA 92623 Phone: (949) 261-1920 Fax: (949) 261-7451 Website: www.pasternack.com E-Mail: sales@pasternack.com	
FSCM NO. 53919	CAD FILE 061013 SCALE N/A SIZE A 2233



FAKRA Plug Connector Crimp/Solder Attachment
 for RG174, RG316, RG188, .100 inch, PE-
 B100, PE-C100, LMR-100, Beige Color

RF Connectors Technical Data Sheet

PE446471

Configuration

- FAKRA Plug Connector
- 50 Ohms
- Straight Body Geometry
- RG174, RG316, RG188, .100 inch, PE-B100, PE-C100, LMR-100 Interface Type
- Crimp/Solder Attachment

Features

- Max. Operating Frequency 4 GHz
- Good VSWR of 1.3:1
- Gold Plated Phosphor Bronze Contact

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

Pasternack's PE446471 FAKRA plug connector with crimp/solder attachment for RG174, RG316, RG188, .100 inch, PE-B100, PE-C100 and LMR-100 is part of our full line of RF components available for same-day shipping. Our FAKRA plug connector operates up to a maximum frequency of 4 GHz and offers good VSWR of 1.3:1.

Our FAKRA plug connector PE446471 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.3:1	
Operating Voltage (AC)			335	Vrms
Dielectric Withstanding Voltage (AC)			1,000	Vrms
Inner Conductor DC Resistance			6	mOhms
Outer Conductor DC Resistance			2.5	mOhms
Insulation Resistance	1,000			MOhms

Mechanical Specifications

Size

Length	0.887 in [22.53 mm]
Width/Dia.	0.37 in [9.40 mm]
Height	0.433 in [11 mm]
Weight	0.004 lbs [1.81 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [FAKRA Plug Connector Crimp/Solder Attachment for RG174, RG316, RG188, .100 inch, PE-B100, PE-C100, LMR-100, Beige Color PE446471](#)



FAKRA Plug Connector Crimp/Solder Attachment
 for RG174, RG316, RG188, .100 inch, PE-
 B100, PE-C100, LMR-100, Beige Color

RF Connectors Technical Data Sheet

PE446471

Material Specifications

Description	Material	Plating
Contact	Phosphor Bronze	Gold
Insulation	PTFE	
Outer Conductor	Brass	Nickel
Body	Plastic	

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

FAKRA Plug Connector Crimp/Solder Attachment for RG174, RG316, RG188, .100 inch, PE-B100, PE-C100, LMR-100, Beige Color from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [FAKRA Plug Connector Crimp/Solder Attachment for RG174, RG316, RG188, .100 inch, PE-B100, PE-C100, LMR-100, Beige Color PE446471](#)

URL: <https://www.pasternack.com/fakra-plug-standard-pe-c100-rg174-rg316-connector-pe446471-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE44647I CAD Drawing

FAKRA Plug Connector Crimp/Solder Attachment for RG174, RG316, RG188, .100 inch, PE-B100, PE-C100, LMR-100, Beige Color

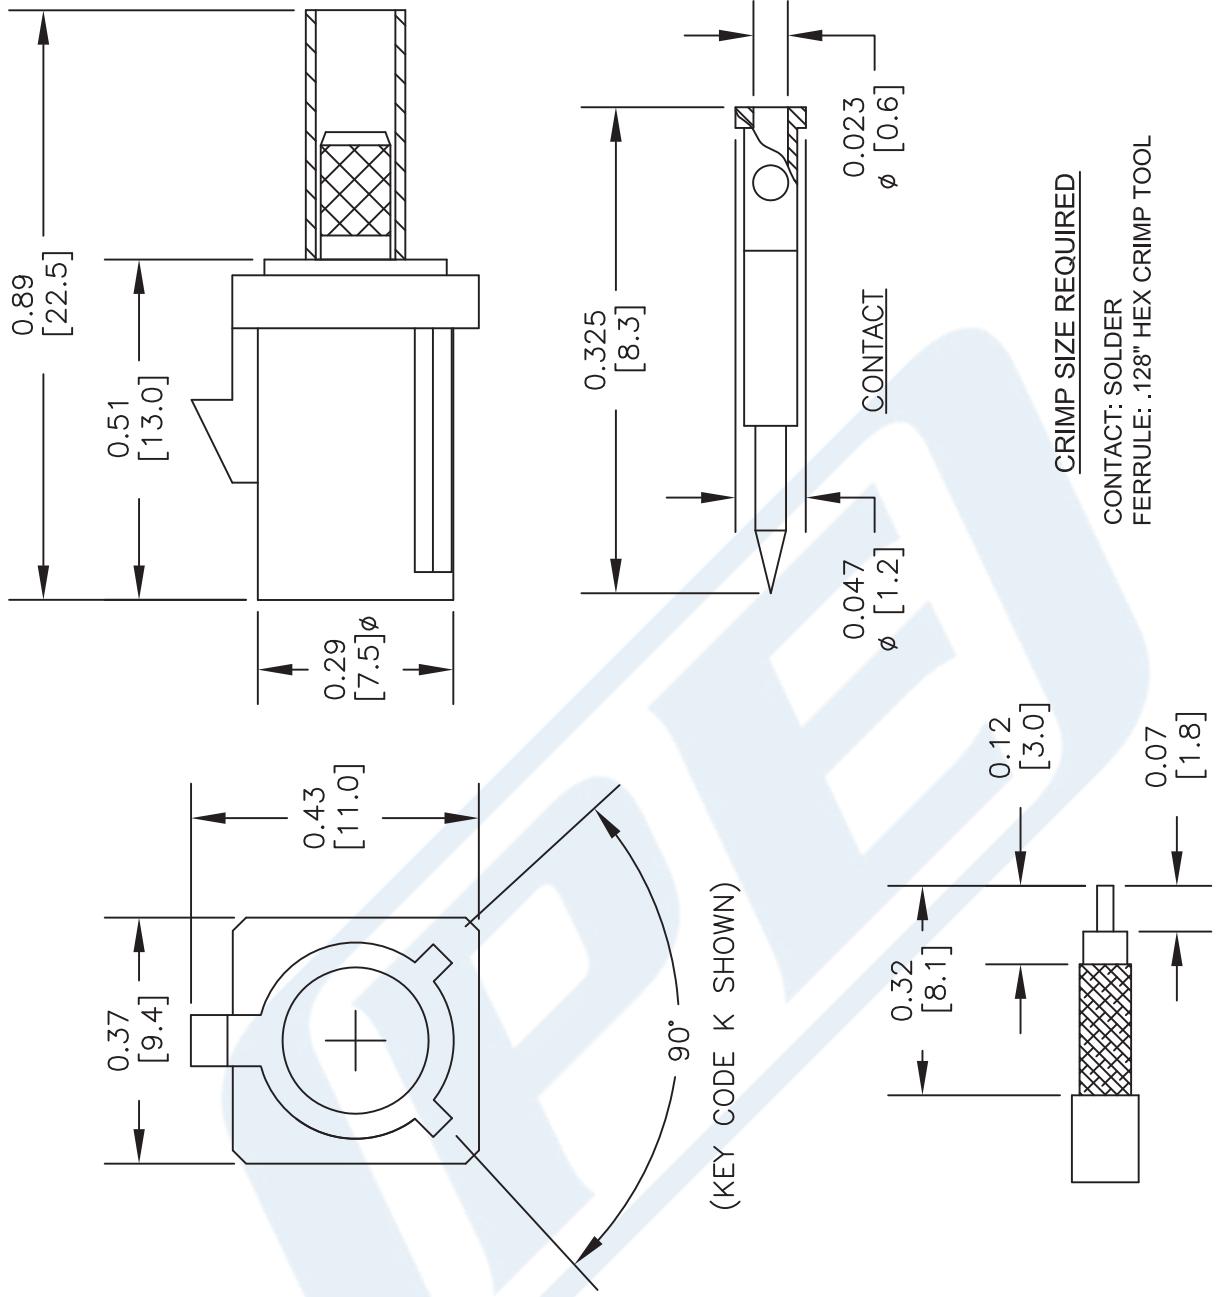

Part Configurator

1. Replace Y with code.

CODING	JACK	COLOR	APPLICATION
A		BLACK	RADIO WITH PHANTOM SUPPLY
B		WHITE	RADIO WITHOUT PHANTOM SUPPLY
C		BLUE	GPS: TELEMATICS OR NAVIGATION
D		BORDEAUX	GSM: CELLULAR PHONE
H		VIOLET	GPS: TELEMATICS AND NAVIGATION
I		BEIGE	BLUETOOTH
K		CURRY	RADIO WITH IF OUTPUT (ANTENNA DIVERSITY)
Z		WATER BLUE	NEUTRAL CODING

STRIPPING DIMENSIONS

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

PE44647/Y

DWG TITLE

CONTACT: SOLDER FERRULE: .128" HEX CRIMP TOOL

CRIMP SIZE REQUIRED

0.023 ø [0.6]

0.047 ø [1.2]

0.325 [8.3]

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

0.325 [8.3]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.07 [1.8]

0.12 [3.0]

0.32 [8.1]

90°

(KEY CODE K SHOWN)

0.37 [9.4]

0.43 [11.0]

0.29 [7.5]ø

0.51 [13.0]

0.89 [22.5]

0.047 ø [1.2]

Flexible RG188 Coax Cable Single Shielded with White PTFE Jacket

TECHNICAL DATA SHEET

RG188A/U

Flexible RG188 Coax Cable Single Shielded with White PTFE Jacket

Configuration

Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Shield Materials	Silver Plated Copper Braid
Jacket Material and Color	PTFE, White

Electrical Specifications

Impedance, Ohms	50
Dielectric Withstanding Voltage, Vrms	2,000

Electrical Specifications by Frequency

Frequency 1

Frequency, MHz	400
Attenuation, dB/100ft [dB/100m]	20 [65.62]

Mechanical Specifications

Temperature

Inner Conductor

Number of Strands	7
Material	Copper Clad Steel
Plating	Silver

0.02 [0.51]

Dielectric:

Type	PTFE
Diameter, in [mm]	0.06 [1.52]

Shield:

Number of	1
Material 1	Silver Plated Copper Braid
Diameter, in [mm]	0.081 [2.06]

Jacket:

Material	PTFE
Diameter, in [mm]	0.11 [2.79]
Color	White
Weight, lbs/ft [Kg/m]	0.011 [0.02]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Flexible RG188 Coax Cable Single Shielded with White PTFE Jacket RG188A/U](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

Flexible RG188 Coax Cable Single Shielded with White PTFE Jacket

TECHNICAL DATA SHEET

RG188A/U

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Yes

Plotted and Other Data

Notes:

Values at 25 °C, sea level


URL: <http://www.pasternack.com/flexible-0.110-rg188-50-ohm-coax-cable-ptfe-jacket-rg188a-u-p.aspx>

Flexible RG188 Coax Cable Single Shielded with White PTFE Jacket from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

RG188A/U CAD Drawing

Flexible RG188 Coax Cable Single Shielded with White PTFE Jacket

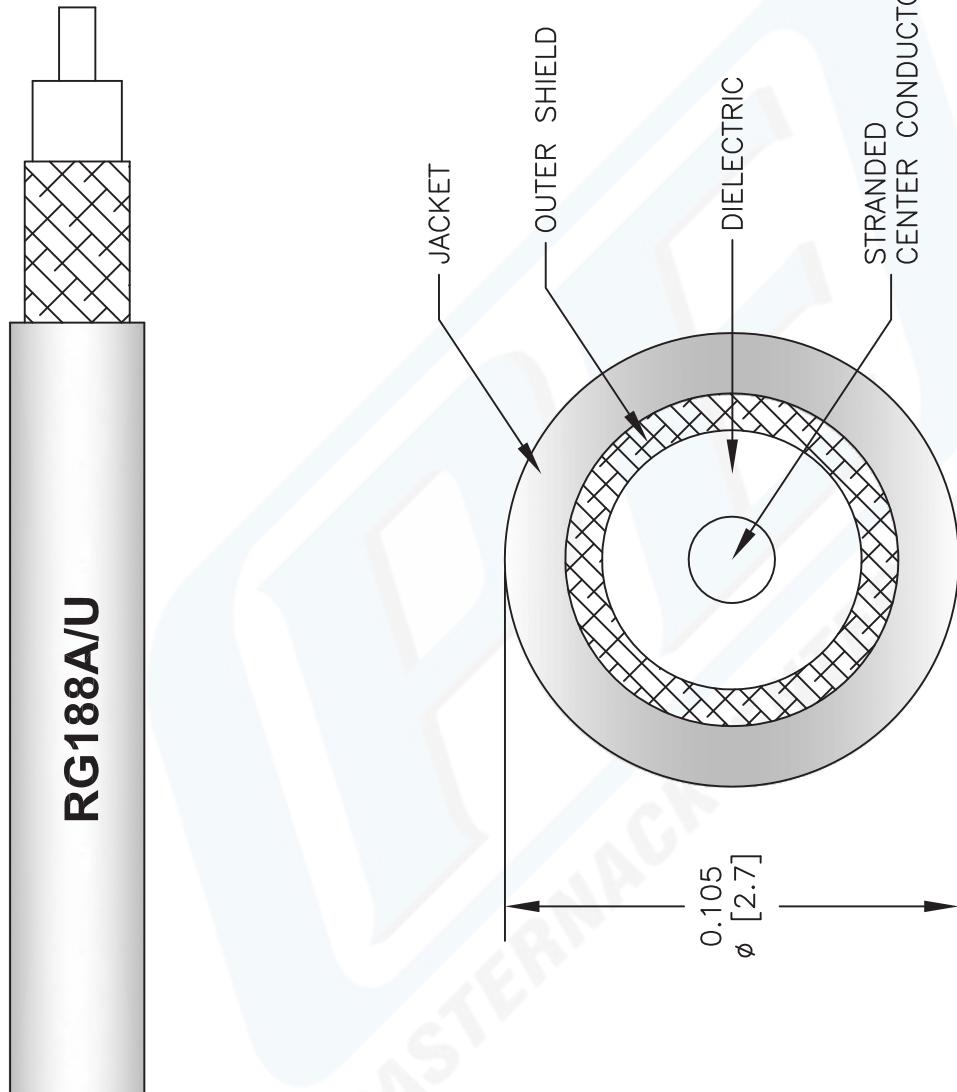

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

PASTERNACK®	DWG TITLE	RG188A/U		
FSCM NO.	CAD FILE	081512-C	SCALE	N/A
			SIZE	A
			2233	

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com