



75 Ohm TNC Male to 75 Ohm TNC Male
Cable Using 75 Ohm RG179 Coax

RF Cable Assemblies Technical Data Sheet

PE3W07820

Configuration

- Connector 1: TNC Male
- Connector 2: TNC Male
- Cable Type: RG179

Features

- 70% Phase Velocity
- FEP Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W07820 75 ohm TNC male to 75 ohm TNC male cable using 75 ohm RG179 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to TNC cable assembly has a male to male gender configuration with 75 ohm flexible RG179 coax.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		70		%
Capacitance		19.4 [63.65]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Weight 0.12 lbs [54.43 g]

Cable

Cable Type RG179
 Impedance 75 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Shield Layer 1 Silver Plated Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm TNC Male to 75 Ohm TNC Male Cable Using 75 Ohm RG179 Coax PE3W07820](#)



75 Ohm TNC Male to 75 Ohm TNC Male
Cable Using 75 Ohm RG179 Coax

RF Cable Assemblies Technical Data Sheet

PE3W07820

Jacket Material	FEP, Tan
Jacket Diameter	0.1 in [2.54 mm]
Repeated Minimum Bend Radius	0.4 in [10.16 mm]

Connectors

Description	Connector 1	Connector 2
Type	TNC Male	TNC Male
Impedance	75 Ohms	75 Ohms
Body Material and Plating	Brass, Nickel	Brass, Nickel

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm TNC Male to 75 Ohm TNC Male Cable Using 75 Ohm RG179 Coax PE3W07820](#)



75 Ohm TNC Male to 75 Ohm TNC Male
Cable Using 75 Ohm RG179 Coax

RF Cable Assemblies Technical Data Sheet

PE3W07820

How to Order

Part Number Configuration:

PE3W07820

- **xx**

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3W07820-12 = 12 inches long cable
PE3W07820-100cm = 100 cm long cable

75 Ohm TNC Male to 75 Ohm TNC Male Cable Using 75 Ohm RG179 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm TNC Male to 75 Ohm TNC Male Cable Using 75 Ohm RG179 Coax PE3W07820](#)

URL: <https://www.pasternack.com/75-ohm-tnc-male-to-75-ohm-tnc-male-cable-using-rg179-pe3w07820-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W07820 CAD Drawing

75 Ohm TNC Male to 75 Ohm TNC Male Cable Using 75 Ohm RG179 Coax

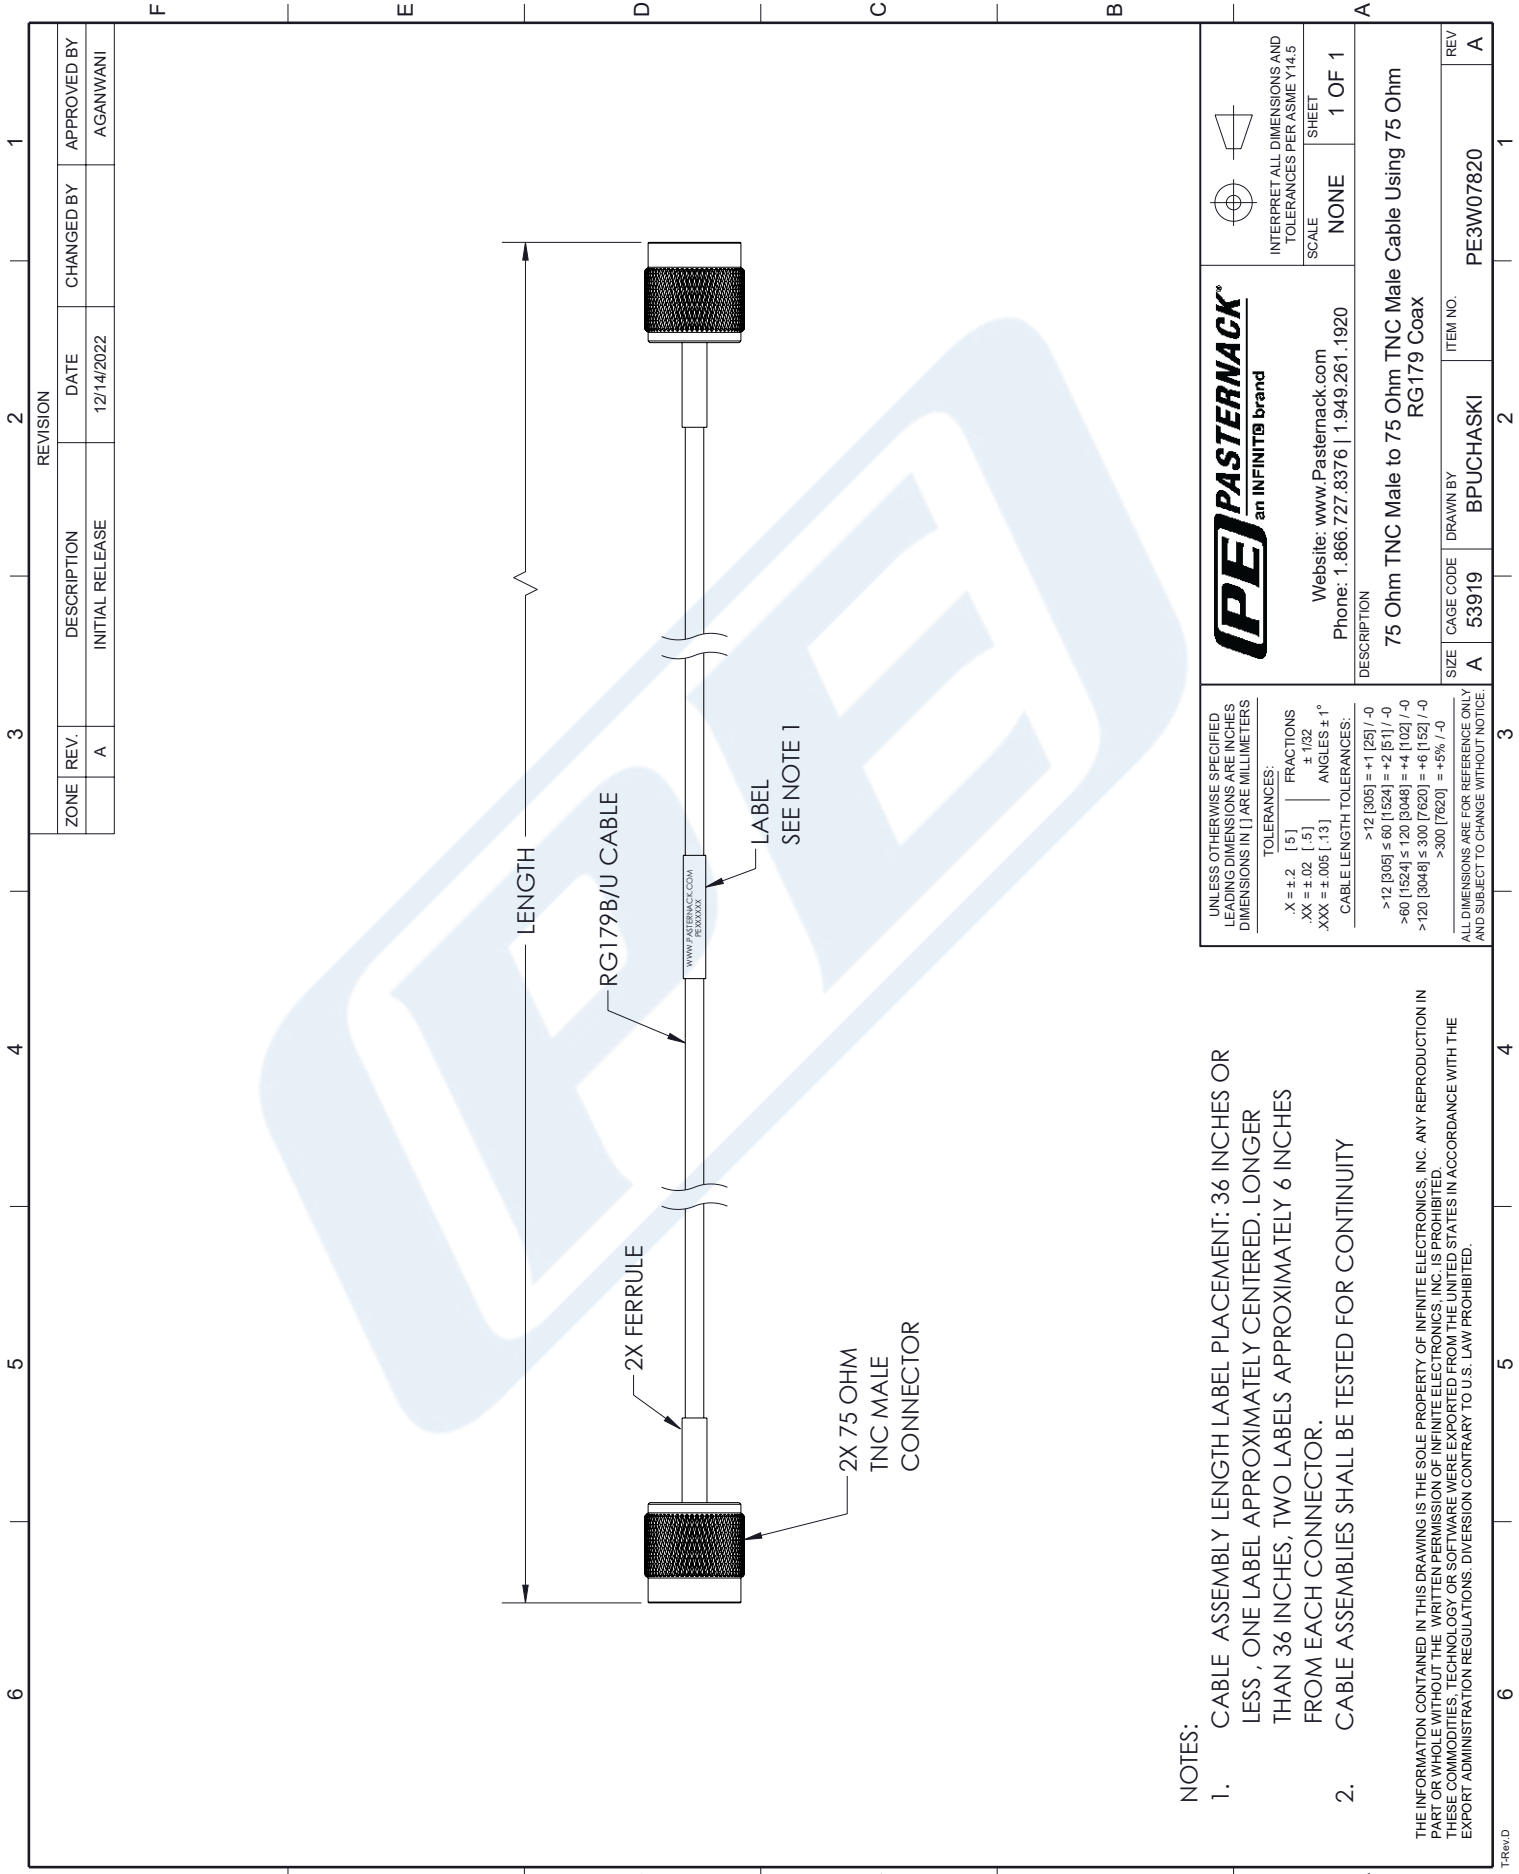

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES:	
.X = ±.2 [.5]	FRACTIONS ± 1/32
.XX = ±.02 [.5]	ANGLES ± 1°
.XXX = ±.005 [.13]	CABLE LENGTH TOLERANCES:
	>12 [305] = +1 [25] / -0
	>12 [305] ≤ 60 [1524] = +2 [51] / -0
	>60 [1524] ≤ 120 [3048] = +4 [102] / -0
	>120 [3048] ≤ 300 [7620] = +6 [152] / -0
	>300 [7620] = +5% / -0
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.	

PE PASTERNAK an INFINITO brand		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5
Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920		SCALE NONE
DESCRIPTION 75 Ohm TNC Male to 75 Ohm TNC Male Cable Using 75 Ohm RG179 Coax		SHEET 1 OF 1
SIZE A	CAGE CODE 53919	REV A
DRAWN BY BPUCHASKI		ITEM NO. PE3W07820