

Water Blue FAKRA Jack Right Angle to SMA Male Cable  
60 Inch Length Using LMR-100 Coax , LF Solder



RF Cable Assemblies Technical Data Sheet


PE3W08152LF-60

**Configuration**

- Connector 1: FAKRA Jack Right Angle
- Connector 2: SMA Male
- Cable Type: LMR-100A

**Features**

- Max Frequency 4 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

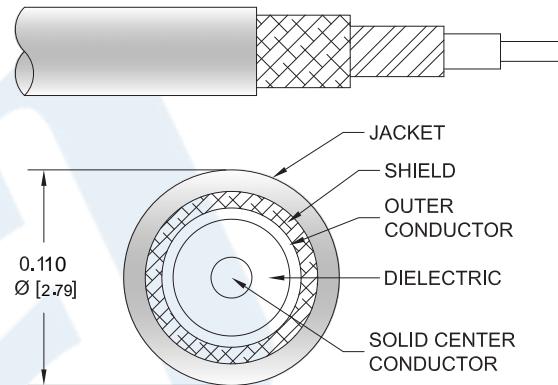

**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3W08152LF-60 water blue FAKRA jack right angle to SMA male 60 inch cable using LMR-100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack FAKRA to SMA cable assembly has a jack to male gender configuration with 50 ohm flexible LMR-100A coax. The PE3W08152LF-60 FAKRA jack to SMA male cable assembly operates to 4 GHz. The right angle FAKRA interface on the LMR-100A cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Water Blue FAKRA Jack Right Angle to SMA Male Cable 60 Inch Length Using LMR-100 Coax , LF Solder PE3W08152LF-60](#)



## Water Blue FAKRA Jack Right Angle to SMA Male Cable 60 Inch Length Using LMR-100 Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

PE3W08152LF-60

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.45:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ω/1000ft [Ω/Km]
Jacket Spark			2,000	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
Insertion Loss (Max.)	0.6	0.65	0.8	1.05	2.6	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. Insertion Loss is estimated as 0.2 dB for the FAKRA connector and 0.1 dB for the SMA connector.

#### Mechanical Specifications

##### Cable Assembly

Length\* 60 in [152.4 cm]

##### Cable

Cable Type	LMR-100A
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.11 in [2.79 mm]

One Time Minimum Bend Radius 0.25 in [6.35 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Water Blue FAKRA Jack Right Angle to SMA Male Cable 60 Inch Length Using LMR-100 Coax , LF Solder PE3W08152LF-60](#)



## Water Blue FAKRA Jack Right Angle to SMA Male Cable 60 Inch Length Using LMR-100 Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

PE3W08152LF-60

Repeated Minimum Bend Radius  
Bending Moment  
Flat Plate Crush  
Tensile Strength

1 in [25.4 mm]  
0.1 lbs-ft [0.14 N-m]  
10 lbs/in [0.18 Kg/mm]  
15 lbs [6.8 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	FAKRA Jack Right Angle	SMA Male
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Phosphor Bronze, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Nickel	
Body Material and Plating	Plastic	Brass, Gold
Coupling Nut Material and Plating		Brass, Gold
Hex Size		5/16 in
Torque		5 in-lbs [0.57 Nm]

#### Compliance Certifications (see product page for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Water Blue FAKRA Jack Right Angle to SMA Male Cable 60 Inch Length Using LMR-100 Coax , LF Solder PE3W08152LF-60](#)



## Water Blue FAKRA Jack Right Angle to SMA Male Cable 60 Inch Length Using LMR-100 Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

PE3W08152LF-60

#### How to Order

Part Number Configuration:

**PE3W08152LF**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W08152LF-12 = 12 inches long cable  
PE3W08152LF-100cm = 100 cm long cable

Water Blue FAKRA Jack Right Angle to SMA Male Cable 60 Inch Length Using LMR-100 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Water Blue FAKRA Jack Right Angle to SMA Male Cable 60 Inch Length Using LMR-100 Coax , LF Solder PE3W08152LF-60](#)

URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3W08152LF-60 CAD Drawing**  
 Water Blue FAKRA Jack Right Angle to SMA Male Cable  
 60 Inch Length Using LMR-100 Coax , LF Solder

REVISIONS					
REV.	DESCRIPTION	DATE	APPROVED		
A	INITIAL RELEASE	8/20/2020	S.SELLIS		

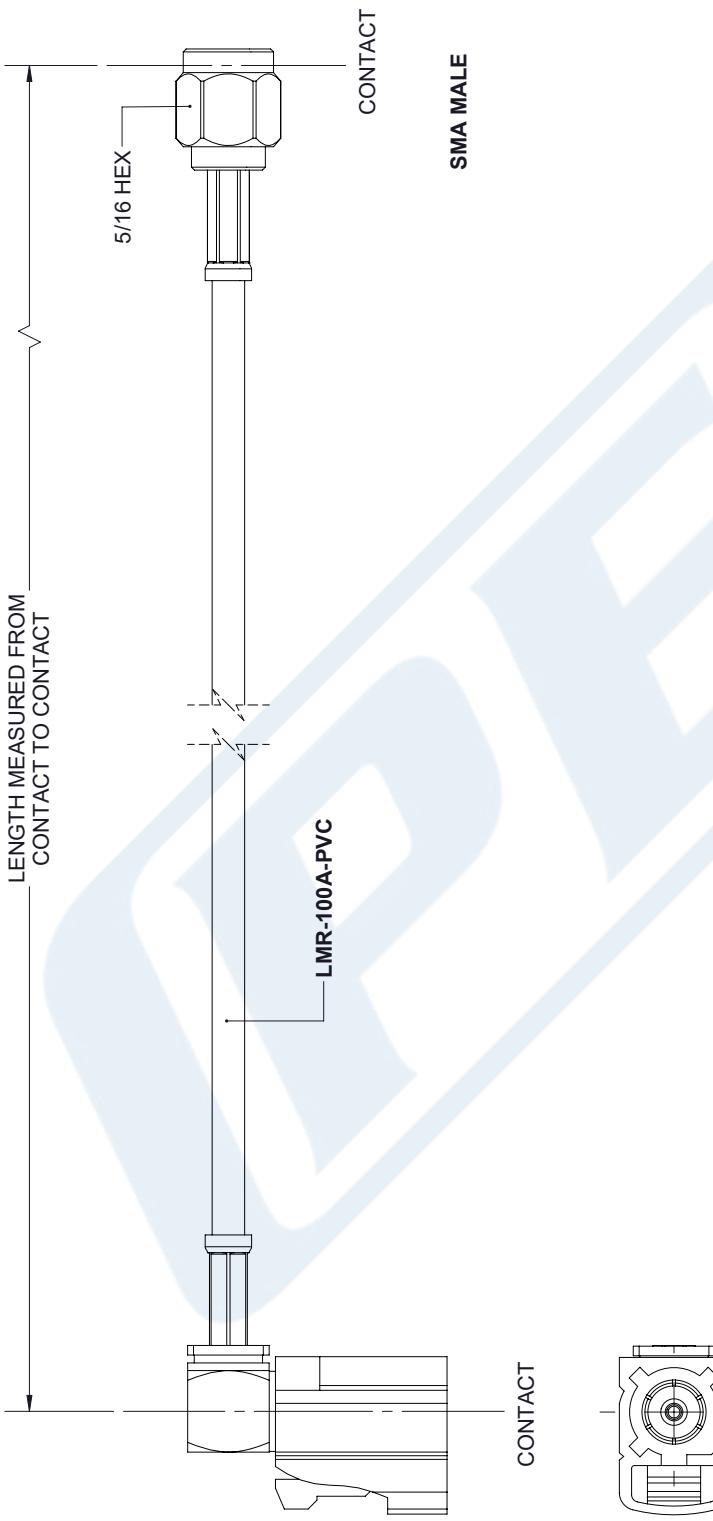

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS		THIRD-ANGLE PROJECTION			
TOLERANCES:		THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.			
$X = \pm 2$ [5.08]      FRACTIONS $.XX = \pm .02$ [.51] $\pm 1/32$ $XXX = \pm .005$ [.13]      ANGLES $\pm 1^\circ$ CABLE LENGTH (L) TOLERANCES: $L \leq 12$ [305] = $+1 [25]$ / -0 $12 [305] < L \leq 60$ [1524] = $+2 [51]$ / -0 $60 [1524] < L \leq 120$ [3048] = $+4 [102]$ / -0 $120 [3048] < L \leq 300$ [7620] = $+6 [152]$ / -0 $300 [7620] < L = +5\% L$ / -0					
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.					
PASTERNAK® an INFINITE® brand		OF			
Pasterнак Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920   1.866.727.8376 Fax: 1.949.261.7451 Website: <a href="http://www.pasterнак.com">www.pasterнак.com</a> E-mail: <a href="mailto:sales@pasterнак.com">sales@pasterнак.com</a>		SHEET 1 OF 1			
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	SCALE	REV
A	53919	K.DANG	PE3W08152LF	N/A	A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE  
 WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.