



TNC Male Right Angle to SMA Male
Right Angle Cable Using RG400 Coax

RF Cable Assemblies Technical Data Sheet

PE3W08659

Configuration

- Connector 1: TNC Male Right Angle
- Connector 2: SMA Male Right Angle
- Cable Type: RG400

Features

- Max Frequency 11 GHz
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W08659 TNC male right angle to SMA male right angle cable using RG400 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to SMA cable assembly has a male to male gender configuration with 50 ohm flexible RG400 coax. The PE3W08659 TNC male to SMA male cable assembly operates to 11 GHz. The right angle TNC and right angle SMA interfaces on the RG400 cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to SMA Male Right Angle Cable Using RG400 Coax PE3W08659](#)



TNC Male Right Angle to SMA Male
Right Angle Cable Using RG400 Coax

RF Cable Assemblies Technical Data Sheet

PE3W08659

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
Capacitance		32 [104.99]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	11	GHz
Insertion Loss (Typ.)	0.089	0.147	0.162	0.36	0.579	dB/ft
	0.29	0.48	0.53	1.18	1.9	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB per connector.

Mechanical Specifications

Cable Assembly

Weight	0.15 lbs [68.04 g]
Cable	
Cable Type	RG400
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.195 in [4.95 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to SMA Male Right Angle Cable Using RG400 Coax PE3W08659](#)



TNC Male Right Angle to SMA Male
Right Angle Cable Using RG400 Coax

RF Cable Assemblies Technical Data Sheet

PE3W08659

Connectors

Description	Connector 1	Connector 2
Type	TNC Male Right Angle	SMA Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	50 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100 µin minimum
Hex Size		16-May inch
Torque		3 in-lbs [0.34 Nm]

Environmental Specifications

Temperature

Operating Range -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to SMA Male Right Angle Cable Using RG400 Coax PE3W08659](#)



TNC Male Right Angle to SMA Male Right Angle Cable Using RG400 Coax

RF Cable Assemblies Technical Data Sheet

PE3W08659

How to Order

Part Number Configuration:

PE3W08659

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W08659-12 = 12 inches long cable
PE3W08659-100cm = 100 cm long cable

TNC Male Right Angle to SMA Male Right Angle Cable Using RG400 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to SMA Male Right Angle Cable Using RG400 Coax PE3W08659](https://www.pasternack.com/tnc-male-right-angle-to-sma-male-right-angle-cable-using-rg400-pe3w08659-p.aspx)

URL: <https://www.pasternack.com/tnc-male-right-angle-to-sma-male-cable-using-rg400-pe3w08659-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

TNC Male Right Angle to SMA Male Right Angle Cable Using RG400 Coax

TNC Male Right Angle to SMA Male Right Angle Cable Using RG400 Coax

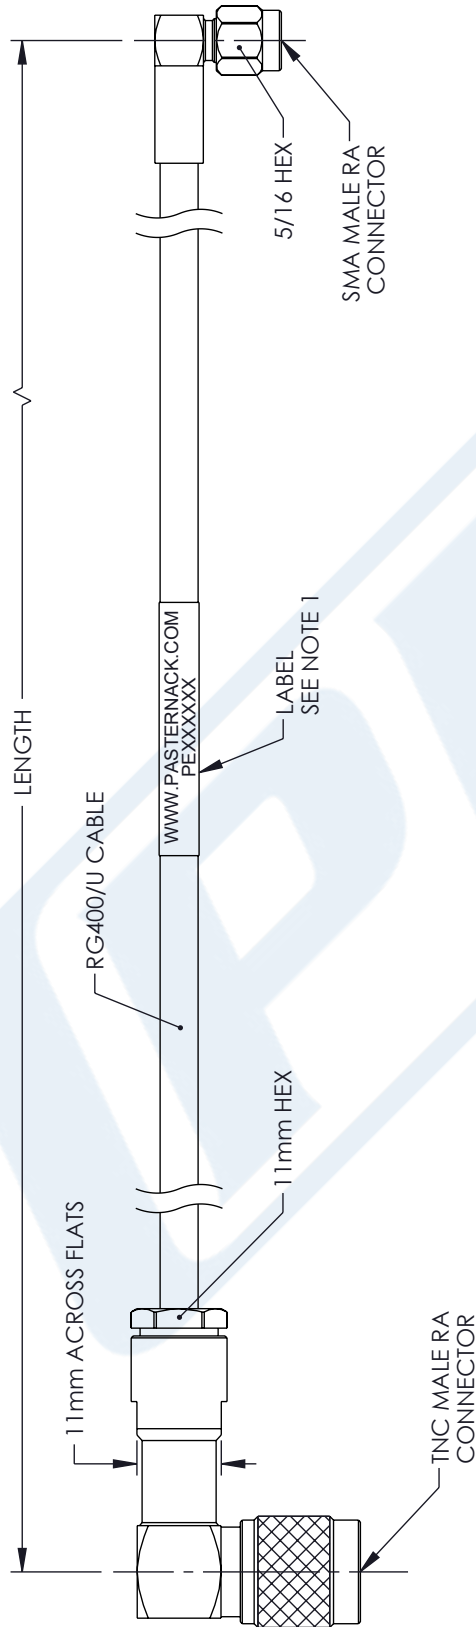

REVISION					
ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED BY
	A	INITIAL RELEASE	01/13/2023	DZINN	AGANWANI

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES LEADING DIMENSIONS IN [] ARE MILLIMETERS		 		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES:		SCALE		SHEET	
$X \pm .2$ [.5]		NONE		1 OF 1	
$XX \pm .02$ [.5]					
$XXX \pm .005$ [.13]					
CABLE LENGTH TOLERANCES:					
>12 [305] $\pm$.125 [1] / -0					
>12 [305] $\leq$ 60 [1524] $\pm$.42 [5] / -0					
>60 [1524] $\leq$ 120 [3048] $\pm$.44 [1.02] / -0					
>120 [3048] $\leq$ 300 [7620] $\pm$.46 [1.52] / -0					
>300 [7620] $\pm$.45% / -0					
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.					

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES
FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.