

## NEX10 Male to QMA Male Right Angle Low PIM Cable 36 Inch Length Using TFT-5G-402 Coax with Times Microwave Components




### PE3W14945-36

#### Configuration

- Connector 1: NEX10 Male
- Connector 2: QMA Male Right Angle
- Cable Type: TFT-5G-402
- Coax Flex Type: Flexible

#### Features

- Max Frequency 3 GHz
- Low PIM: -150 dBc Max
- Shielding Effectivity > 80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket
- 100 Mating Cycles

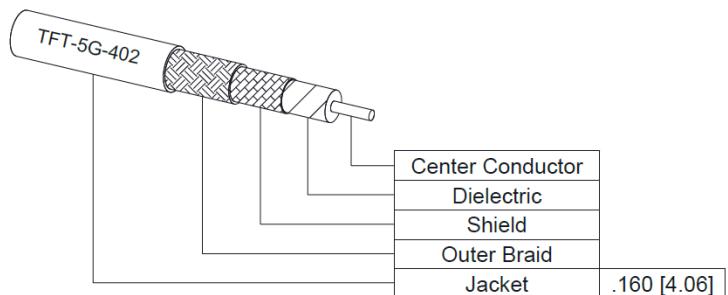

#### Applications

- General Purpose
- Laboratory Use
- Low PIM Applications

#### Description

Pasternack's PE3W14945-36 NEX10 male to QMA male right angle 36 inch cable using TFT-5G-402 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack NEX10 to QMA cable assembly has a male to male gender configuration with 50 ohm flexible TFT-5G-402 coax. The PE3W14945-36 NEX10 male to QMA male cable assembly operates to 3 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -150 dBc. The right angle QMA interface on the TFT-5G-402 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	80			dB
Passive Intermodulation			-150	dBc
IM3 (2x43dBm Tones) at 850 MHz or 1900 MHz				
Capacitance		26.7 [87.6]		pF/ft [pF/m]

#### Specifications by Frequency

## NEX10 Male to QMA Male Right Angle Low PIM Cable 36 Inch Length Using TFT-5G-402 Coax with Times Microwave Components



### PE3W14945-36

Part Number	Length	Description	F1	F2	F3	Units	Weight (lbs)
		Frequency	500	1000	3000	MHz	
PE3W14945	Custom Lengths Available	Insertion Loss (Typ.)	0.081	0.111	0.205	dB/ft	
			0.27	0.37	0.68	dB/m	
PE3W14945-12	12 in	Insertion Loss (Typ.)	0.57	0.6	0.69	dB	0.088
PE3W14945-24	24 in	Insertion Loss (Typ.)	0.65	0.71	0.89	dB	0.117
PE3W14945-36	36 in	Insertion Loss (Typ.)	0.73	0.82	1.1	dB	0.145
PE3W14945-60	60 in	Insertion Loss (Typ.)	0.89	1.04	1.51	dB	0.201
PE3W14945-200CM	200 CM	Insertion Loss (Typ.)	1.02	1.21	1.83	dB	0.245

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.24 dB  
Loss due to Connector 2: 0.24 dB  
Base Weight: 0.088 pounds  
Additional Weight per Inch: 0.00234 pounds

### Mechanical Specifications

#### Cable Assembly

Length 36 in [914.4 mm]  
Width/Diameter .5 in [12.7 mm]  
Weight 0.145 lbs [65.77 g]

#### Cable

Cable Type TFT-5G-402  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper  
Dielectric Type PTFE  
Number of Shields 2  
Shield Layer 1 Tin  
Outer Conductor 1 Material and Plating Copper, Tin  
Jacket Material FEP, Blue  
Jacket Diameter 0.16 in [4.06 mm]  
One Time Minimum Bend Radius 0.75 in [19.05 mm]

NEX10 Male to QMA Male Right Angle Low PIM  
 Cable 36 Inch Length Using TFT-5G-402 Coax with  
 Times Microwave Components



**PE3W14945-36**

### Connectors

Description	Connector 1	Connector 2
Type	NEX10 Male	QMA Male Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Mating Cycles	100	100
Contact Material and Plating	Brass, Silver	Beryllium Copper, Silver
Contact Plating Specification	100 $\mu$ in	200 $\mu$ in
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Silver	Brass, Tri-Metal
Body Plating Specification	100 $\mu$ in	80 $\mu$ in
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	100 $\mu$ in	80 $\mu$ in
Torque	9 in-lbs 1.02 Nm	

### Environmental Specifications

Operating Range Temperature -40 to +85 deg C

**Compliance Certifications** (see product page for current document)

### Plotted and Other Data

Notes:

NEX10 Male to QMA Male Right Angle Low PIM  
Cable 36 Inch Length Using TFT-5G-402 Coax with  
Times Microwave Components




## PE3W14945-36

### Typical Performance Data

### How to Order

Part Number Configuration:

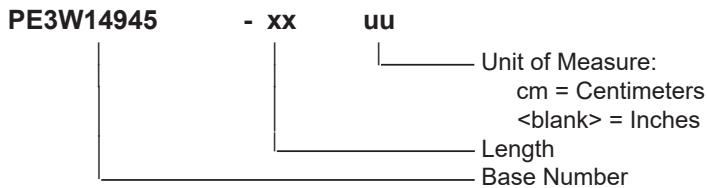

Example: PE3W14945-12 = 12 inches long cable  
PE3W14945-100cm = 100 cm long cable

NEX10 Male to QMA Male Right Angle Low PIM Cable 36 Inch Length Using TFT-5G-402 Coax with Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [NEX10 Male to QMA Male Right Angle Low PIM Cable 36 Inch Length Using TFT-5G-402 Coax with Times Microwave Components PE3W14945-36](#)

URL: <https://www.pasternack.com/nex10-male-to-qma-male-low-pim-cable-36-inch-length-using-tft-5g-402-pe3w14945-36-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3W14945-36 CAD Drawing

NEX10 Male to QMA Male Right Angle Low PIM Cable 36 Inch Length Using TFT-5G-402 Coax with Times Microwave Components

