

2.4mm Female Precision Calibration Kit Component Load Operating from DC to 50 GHz

Calibration Kits Components Technical Data Sheet

PE5TR1006

Features

- Precision Controlled Impedance
- Ultra Low VSWR
- Replaces Existing Calibrating Kit Components
- Serial Numbers on Shorts, Opens and Loads
- In Stock and Ready to Ship

Applications

- Vector Network Analyzer Calibration
- SOLT or OSLT Calibration
- Device Characterization
- De-embedding
- Precision Calibrating Kits

Description

Pasternack's PE5TR1006 2.4mm female precision load is part of our full line of RF components available for same-day shipping. This 2.4mm, precision load is suitable for calibrating on most network and site analyzers. The controlled impedance of this broadband 2.4mm load delivers low VSWR and supports calibrations through the entire frequency range of the precision connector interface.

Our 2.4mm female precision load datasheet, specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave components allow designers to configure and customize their test solutions however they like. Whether the need is to provide precise SOLT / OSLT network analyzer calibrations or calibration kit replacement, Pasternack can ship you the right components same day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		50	GHz
Impedance		50		Ohms
Input Power, CW			0.5	Watts
Input Power, Peak			250	Watts
...				

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 4	4 to 50				GHz
VSWR, Max	1.02:1	1.15:1				

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Female Precision Calibration Kit Component Load Operating from DC to 50 GHz PE5TR1006](#)

2.4mm Female Precision Calibration Kit Component
Load Operating from DC to 50 GHz



Calibration Kits Components Technical Data Sheet

PE5TR1006

Mechanical Specifications

Size

Length

1.52 in [38.61 mm]

Width/Diameter

0.36 in [9.14 mm]

Pin Depth

0 to 0.002 in

Connector 1

Connector Type

2.4mm Female

Body Material and Plating

Beryllium Copper, Gold

Connector 2

Environmental Specifications


Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Typical Performance Data

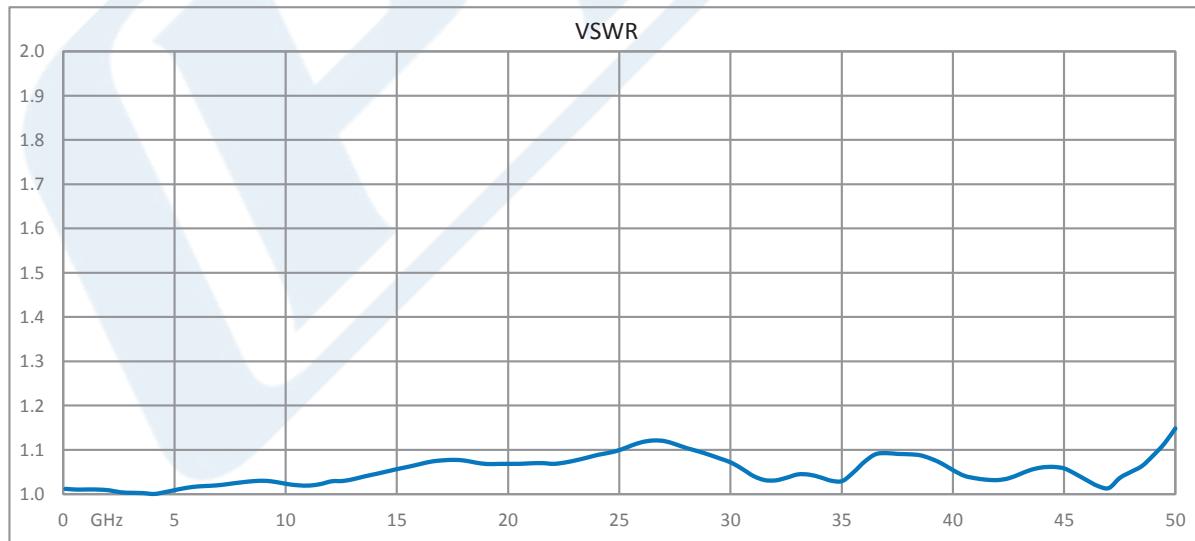

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Female Precision Calibration Kit Component Load Operating from DC to 50 GHz PE5TR1006](#)

2.4mm Female Precision Calibration Kit Component Load Operating from DC to 50 GHz

Calibration Kits Components Technical Data Sheet

PE5TR1006

2.4mm Female Precision Calibration Kit Component Load Operating from DC to 50 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Female Precision Calibration Kit Component Load Operating from DC to 50 GHz PE5TR1006](#)

URL: <https://www.pasternack.com/2.4mm-female-calibration-kit-component-load-50-ghz-pe5tr1006-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE5TR1006 CAD Drawing

2.4mm Female Precision Calibration Kit Component Load Operating from DC to 50 GHz

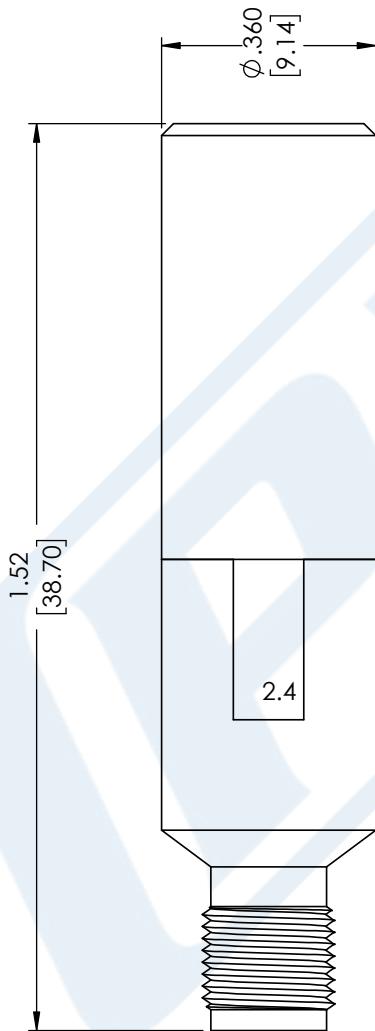

2.4mm FEMALE TERMINATION

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

	PASTERNACK[®] PASTERNACK Enterprises, Inc. P.O. Box 16759 Irvine CA 92623 Phone: (949) 261-1920 Fax: (949) 261-7451 Website: www.pasternack.com E-Mail: sales@pasternack.com	
	DWG TITLE PE5TR1006	CAGE CODE 53919