



SP4T, IP64 Rated Electromechanical Relay Latching
 Switch, DC to 18 GHz, 90W, 28VDC, SMA

Electromechanical Relay Switches Technical Data Sheet

PE71S6548

Features

- SP4T Electromechanical Relay Switch
- IP64 Level 1 Rated
- DC to 18 GHz Frequency Range
- Latching Actuator
- 5M Lifecycle Rating
- Insertion Loss 0.2 dB typ
- Isolation > 80 dB typ
- VSWR as low as 1.25:1 max
- SMA Female Connectors
- +28 Volt DC Bias
- 15 Pin D-Sub Connector for DC Control
- -54°C to +85°C Operating Temperature
- Up to 90 Watt Average Power Handling
- 50 Ohm Design
- Hot Switching Capability - Consult Factory
- S-Parameter Data available upon request
- Rugged Design meets Mil-STD-202 Test Conditions
- Actuating Set/Reset Feature

Applications

- Aerospace & Defense
- Test & Measurement
- Microwave Radio Systems
- Military & Commercial Communication Systems
- Research & Development
- SATCOM
- Wireless Communications
- Enterprise
- IoT

Description

The PE71S6548 is a Ruggedized SP4T electromechanical relay switch that operates across a broadband frequency range from DC to 18 GHz and can handle up to 90W of average power in a break before make condition. The 50 Ohm design is IP64 compliant with a Level 1 moisture seal and specially designed to operate reliably in harsh usage environments and conditions, such as over extreme temperatures and wet or dusty environments. Intrusion protection offers full protection against dust and other particulates. Moisture protection enables resistance to splashes in all directions. The switch has a Latching Actuator that magnetically latches in place after the control voltage is removed. For power sensitive applications, this is the best actuator option. Impressive typical performance includes 0.2 dB insertion loss and isolation greater than 80 dB. This switch requires +28Vdc bias voltage, operates over a temperature range of -54°C to +85°C, and is rated for 5 million lifecycles. The rugged and compact package assembly supports SMA female connectors and a 15 pin D-Sub connector for DC control. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions for shock and random vibration.

Electrical Specifications (TA = 25°C, DC Voltage = 28 Vdc)

Switch Type
 Actuator Type

SP4T
 Latching

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
Operating Voltage	26	28	30	Volts
Actuating Set Current			110	mA
Actuating Reset Current			440	mA
VSWR		1.1:1	1.5:1	
Insertion Loss		0.2	0.5	dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T, IP64 Rated Electromechanical Relay Latching Switch, DC to 18 GHz, 90W, 28VDC, SMA PE71S6548](#)



SP4T, IP64 Rated Electromechanical Relay Latching
Switch, DC to 18 GHz, 90W, 28VDC, SMA

Electromechanical Relay Switches Technical Data

PE71S6548

Isolation	80	90	dB
Switching Time		<20	ms Typ

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 12	12 to 18			GHz
VSWR, Max	1.25:1	1.4:1	1.5:1			
Insertion Loss, Max	0.2	0.4	0.5			dB
Isolation, Min	80	80	80			dB

Mechanical Specifications

Size

Length	1.75 in [44.45 mm]
Width/Diameter	1.75 in [44.45 mm]
Height	1.75 in [44.45 mm]
Weight	0.164 lbs [74.39 g]

Connectors

RF Connector Type	SMA Female
Control Connector	D-Subminiature

Environmental Specifications

Temperature

Operating Range	-54 to +85 deg C
Storage Range	-55 to +100 deg C

Ingress Protection (IP) Rating	IP64
Shock	MIL-STD-202 Method 213, Condition D, 500 G (non oper)
Vibration	MIL-STD-202 Method 204, Condition D, 10G RMS (non oper)

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T, IP64 Rated Electromechanical Relay Latching Switch, DC to 18 GHz, 90W, 28VDC, SMA PE71S6548](#)




SP4T, IP64 Rated Electromechanical Relay Latching
Switch, DC to 18 GHz, 90W, 28VDC, SMA

Electromechanical Relay Switches Technical Data

PE71S6548

Typical Performance Data

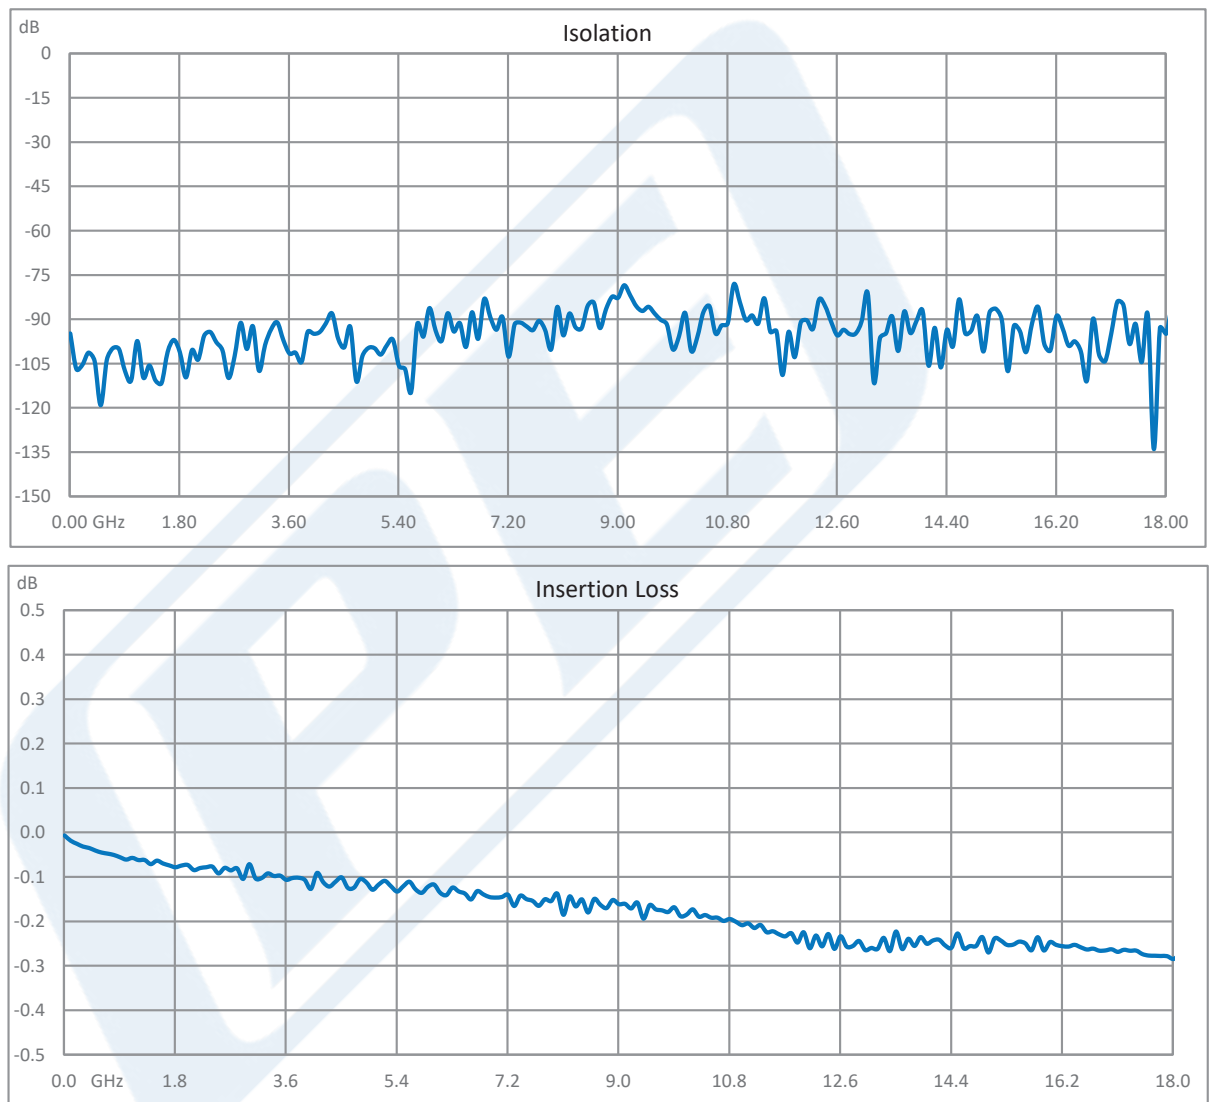


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T, IP64 Rated Electromechanical Relay Latching Switch, DC to 18 GHz, 90W, 28VDC, SMA PE71S6548](#)



SP4T, IP64 Rated Electromechanical Relay Latching
Switch, DC to 18 GHz, 90W, 28VDC, SMA

Electromechanical Relay Switches Technical Data

PE71S6548

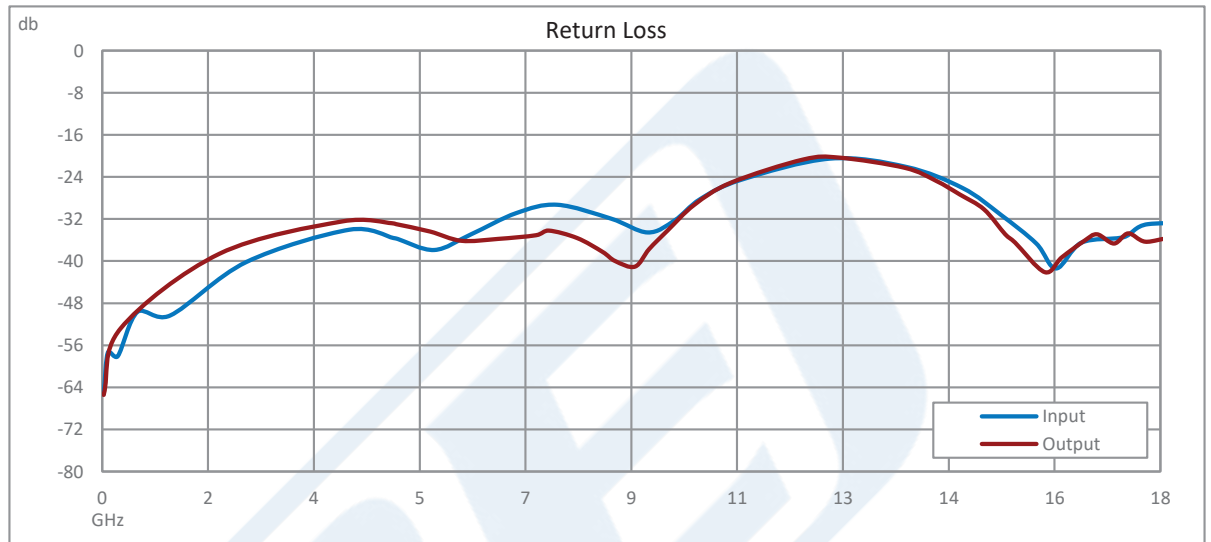

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T, IP64 Rated Electromechanical Relay Latching Switch, DC to 18 GHz, 90W, 28VDC, SMA PE71S6548](#)





SP4T, IP64 Rated Electromechanical Relay Latching
Switch, DC to 18 GHz, 90W, 28VDC, SMA

Electromechanical Relay Switches Technical Data

PE71S6548

Power Handling vs. Frequency

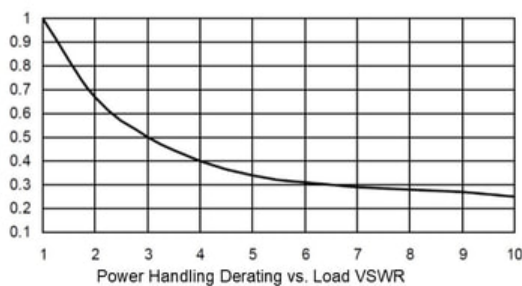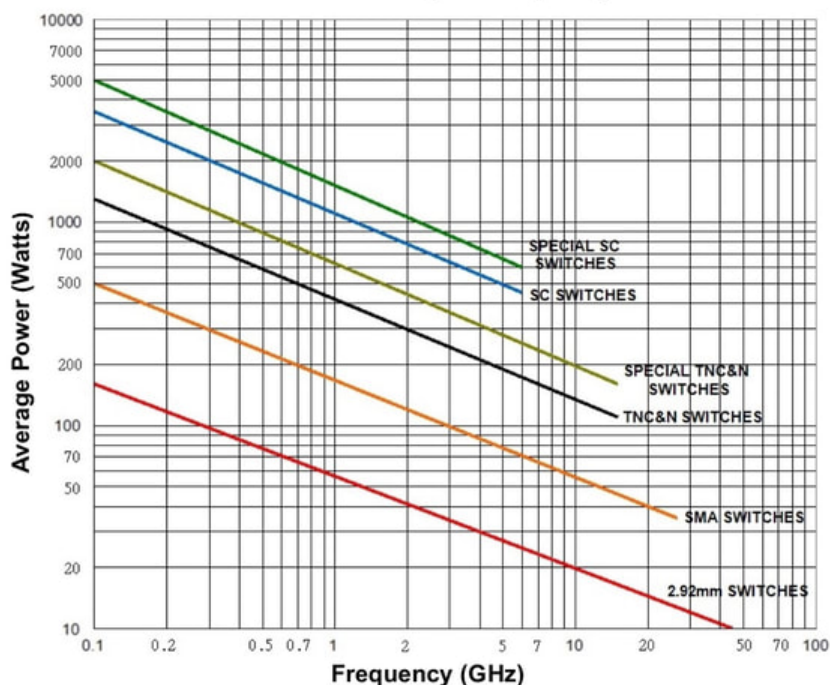

Power handling chart and derating curves based on the following conditions:

- Ambient temperature: 40°C or less
- Altitude: Sea level
- Load VSWR: 1.20:1 Maximum
- Relative Humidity: 40-50%
- Cold switching: RF signal off

Note: specifications subject to change without notice

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T, IP64 Rated Electromechanical Relay Latching Switch, DC to 18 GHz, 90W, 28VDC, SMA PE71S6548](#)



SP4T, IP64 Rated Electromechanical Relay Latching
Switch, DC to 18 GHz, 90W, 28VDC, SMA

Electromechanical Relay Switches Technical Data

PE71S6548

SP4T, IP64 Rated Electromechanical Relay Latching Switch, DC to 18 GHz, 90W, 28VDC, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T, IP64 Rated Electromechanical Relay Latching Switch, DC to 18 GHz, 90W, 28VDC, SMA PE71S6548](https://www.pasternack.com/sp4t-electromechanical-relay-latching-switch-18-ghz-sma-pe71s6548-p.aspx)

URL: <https://www.pasternack.com/sp4t-electromechanical-relay-latching-switch-18-ghz-sma-pe71s6548-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE71S6548 CAD Drawing

SP4T, IP64 Rated Electromechanical Relay Latching Switch, DC to 18 GHz, 90W, 28VDC, SMA

ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED BY
	A	INITIAL RELEASE	02/07/2023	DMAY	TGALLA

REVISION	1
----------	---

REVISION	2
----------	---

REVISION	3
----------	---

REVISION	4
----------	---

REVISION	5
----------	---

REVISION	6
----------	---

REVISION	7
----------	---

REVISION	8
----------	---

REVISION	9
----------	---

REVISION	10
----------	----

REVISION	11
----------	----

REVISION	12
----------	----

REVISION	13
----------	----

REVISION	14
----------	----

REVISION	15
----------	----

REVISION	16
----------	----

REVISION	17
----------	----

REVISION	18
----------	----

REVISION	19
----------	----

REVISION	20
----------	----

REVISION	21
----------	----

REVISION	22
----------	----

REVISION	23
----------	----

REVISION	24
----------	----

REVISION	25
----------	----

REVISION	26
----------	----

REVISION	27
----------	----

REVISION	28
----------	----

REVISION	29
----------	----

REVISION	30
----------	----

REVISION	31
----------	----

REVISION	32
----------	----

REVISION	33
----------	----

REVISION	34
----------	----

REVISION	35
----------	----

REVISION	36
----------	----

REVISION	37
----------	----

REVISION	38
----------	----

REVISION	39
----------	----

REVISION	40
----------	----

REVISION	41
----------	----

REVISION	42
----------	----

REVISION	43
----------	----

REVISION	44
----------	----

REVISION	45
----------	----

REVISION	46
----------	----

REVISION	47
----------	----

REVISION	48
----------	----

REVISION	49
----------	----

REVISION	50
----------	----

REVISION	51
----------	----

REVISION	52
----------	----

REVISION	53
----------	----

REVISION	54
----------	----

REVISION	55
----------	----

REVISION	56
----------	----

REVISION	57
----------	----

REVISION	58
----------	----

REVISION	59
----------	----

REVISION	60
----------	----

REVISION	61
----------	----

REVISION	62
----------	----

REVISION	63
----------	----

REVISION	64
----------	----

REVISION	65
----------	----

REVISION	66
----------	----

REVISION	67
----------	----

REVISION	68
----------	----

REVISION	69
----------	----

REVISION	70
----------	----

REVISION	71
----------	----

REVISION	72
----------	----

REVISION	73
----------	----

REVISION	74
----------	----

REVISION	75
----------	----

REVISION	76
----------	----

REVISION	77
----------	----

REVISION	78
----------	----

REVISION	79
----------	----

REVISION	80
----------	----

REVISION	81
----------	----

REVISION	82
----------	----

REVISION	83
----------	----

REVISION	84
----------	----

REVISION	85
----------	----

REVISION	86
----------	----

REVISION	87
----------	----

REVISION	88
----------	----

REVISION	89
----------	----

REVISION	90
----------	----

REVISION	91
----------	----

REVISION	92
----------	----

REVISION	93
----------	----

REVISION	94
----------	----

REVISION	95
----------	----

REVISION	96
----------	----

REVISION	97
----------	----

REVISION	98
----------	----

REVISION	99
----------	----

REVISION	100
----------	-----

REVISION	101
----------	-----

REVISION	102
----------	-----

REVISION	103
----------	-----

REVISION	104
----------	-----

REVISION	105
----------	-----

REVISION	106
----------	-----

REVISION	107
----------	-----

REVISION	108
----------	-----

REVISION	109
----------	-----

REVISION	110
----------	-----

REVISION	111
----------	-----

REVISION	112
----------	-----

REVISION	113
----------	-----

REVISION	114
----------	-----

REVISION	115
----------	-----

REVISION	116
----------	-----

REVISION	117
----------	-----

REVISION	118
----------	-----

REVISION	119
----------	-----

REVISION	120
----------	-----

REVISION	121
----------	-----

REVISION	122
----------	-----

REVISION	123
----------	-----

REVISION	124
----------	-----

REVISION	125
----------	-----

REVISION	126
----------	-----

REVISION	127
----------	-----

REVISION	128
----------	-----

REVISION	129
----------	-----

REVISION	130
----------	-----

REVISION	131
----------	-----

REVISION	132
----------	-----

REVISION	133
----------	-----

REVISION	134
----------	-----

REVISION	135
----------	-----

REVISION	136
----------	-----

REVISION	137
----------	-----

REVISION	138
----------	-----

REVISION	139
----------	-----

REVISION	140
----------	-----

REVISION	141
----------	-----

REVISION	142
----------	-----

REVISION	143
----------	-----

REVISION	144
----------	-----

REVISION	145
----------	-----

REVISION	146
----------	-----

REVISION	147
----------	-----

REVISION	148
----------	-----

REVISION	149
----------	-----

REVISION	150
----------	-----

REVISION	151
----------	-----

REVISION	152
----------	-----

REVISION	153
----------	-----

REVISION	154
----------	-----

REVISION	155
----------	-----

REVISION	156
----------	-----

REVISION	157
----------	-----

REVISION	158
----------	-----

REVISION	159
----------	-----

REVISION	160
----------	-----

REVISION	161
----------	-----

REVISION	162
----------	-----

REVISION	163
----------	-----

REVISION	164
----------	-----

REVISION	165
----------	-----

REVISION	166
----------	-----

REVISION	167
----------	-----

REVISION	168
----------	-----

REVISION	169
----------	-----

REVISION	170
----------	-----

REVISION	171
----------	-----

REVISION	172
----------	-----

REVISION	173
----------	-----

REVISION	174
----------	-----

REVISION	175
----------	-----

REVISION	176
----------	-----

REVISION	177
----------	-----

REVISION	178
----------	-----

REVISION	179
----------	-----

REVISION	180
----------	-----

REVISION	181
----------	-----

REVISION	182
----------	-----

REVISION	183
----------	-----

REVISION	184
----------	-----

REVISION	185
----------	-----

REVISION	186
----------	-----

REVISION	187
----------	-----

REVISION	188
----------	-----

REVISION	189
----------	-----

REVISION	190
----------	-----

REVISION	191
----------	-----

REVISION	192
----------	-----

REVISION	193
----------	-----

REVISION	194
----------	-----

REVISION	195
----------	-----

REVISION	196
----------	-----

REVISION	197
----------	-----

REVISION	198
----------	-----

REVISION	199
----------	-----

REVISION	200
----------	-----

REVISION	201
----------	-----

REVISION	202
----------	-----

REVISION	203
----------	-----

REVISION	204
----------	-----

REVISION	205
----------	-----

REVISION	206
----------	-----

REVISION	207
----------	-----

REVISION	208
----------	-----

REVISION	209
----------	-----

REVISION	210
----------	-----

REVISION	211
----------	-----

REVISION	212
----------	-----

REVISION	213
----------	-----

REVISION	214
----------	-----

REVISION	215
----------	-----


REVISION	216
----------	-----

REVISION	217
----------	-----

REVISION	218
----------	-----

||
||
||

15-PIN D-SUB CONNECTOR

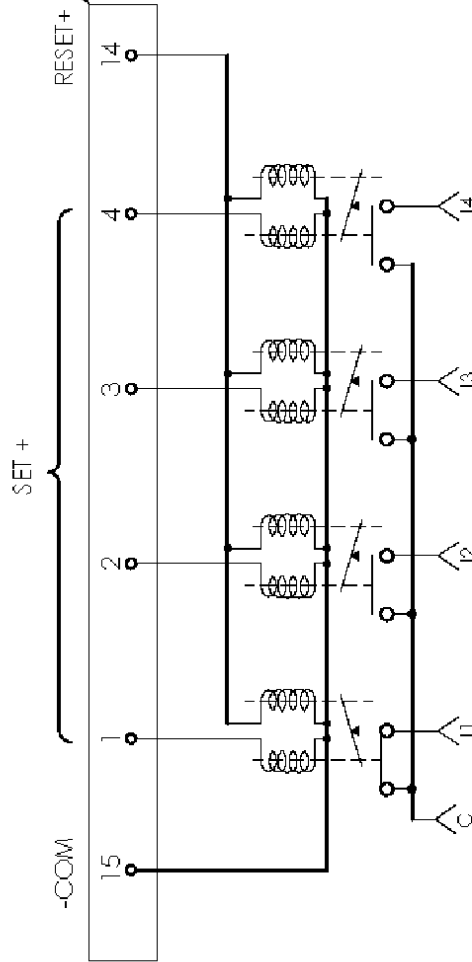


SCHEMATIC

(COIL 1 SHOWN LAST ENERGIZED)

ACTION

CHARACTERISTICS:

- REQUIRES TWO (2) SEQUENTIAL PULSES (RESET & SET)
- T1 & T2 = 30mSEC MIN
- T3 = 10mSEC MIN
- T4 & T5 = 20mSEC MAX

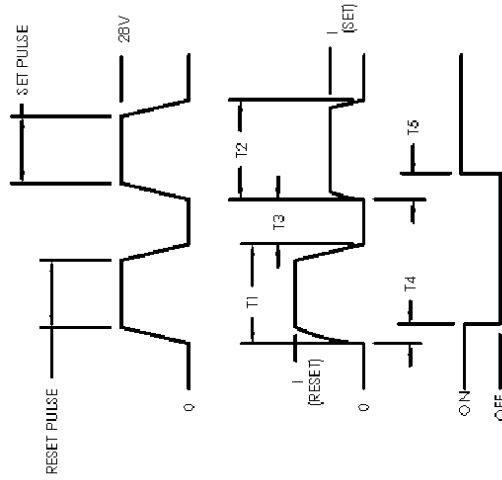

TRUTH TABLE/PIN ASSIGNMENT :
PIN ASSIGNMENT

TERMINALS	RF PATH			
	J1	J2	J3	J4
D-SUB PIN ASSIGNMENT				
1 (SET+)	ON	OFF	OFF	OFF
2 (SET+)	OFF	ON	OFF	OFF
3 (SET+)	OFF	OFF	ON	OFF
4 (SET+)	OFF	OFF	OFF	ON
14 (RESET+)	ALL OFF			

PIN 15, -COM

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [5] FRACTIONS
.XX = ±.02 [.5] ANGLES ± 1°
XXX = ±.005 [.13]
CABLE LENGTH TOLERANCES:
≤ 12 [305] = ±.125 [-0
> 12 [305] ≤ 60 [1524] = ±.25 [-0
> 60 [1524] ≤ 120 [3048] = ±.5 [-0
> 120 [3048] ≤ 300 [7620] = ±.75 [-0
> 300 [7620] = ±1.5 [-0
ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE

PE PASTERNAK
an INFINITI® brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION

SP4T, SMA, LATCHING, 18GHz, 28VDC, D-SUB, RUGGEDIZED



SCALE NONE
SHEET 2 OF 2

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.