



Isolator With 15 dB Isolation From 2 GHz to 8 GHz, 10 Watts And SMA Female

Isolators Technical Data Sheet

PE8316

Features

- 2 to 8 GHz Frequency Range
- Max Forward and Reverse Power 10 Watts CW
- Insertion Loss < 1.5 dB
- VSWR < 1.35:1
- Isolation > 15 dB
- SMA Female Connectors

Applications

- Radar Systems
- Military
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

Description

The PE8316 is a single junction isolator offering a forward and reverse power rating of 10 Watts CW over an operational frequency band of 2 to 8 GHz. This coaxial isolator uses SMA female connectors on all ports and has a minimum of 15 dB isolation.

Pasternack offers a wide variety of isolators to fit your needs. These are two-port devices that transmit microwave or radio frequency power in one direction only and block the signal in the opposite direction. They can be thought of as a diode for RF energy. Isolators are used to isolate equipment from the effects of conditions outside of the equipment. For instance they are used to prevent a microwave source being detuned by a mismatched load. Pasternack's isolators feature excellent insertion loss, high isolation and reliability.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		8	GHz
Impedance		50		Ohms
Insertion Loss			1.5	dB
Isolation	15			dB
VSWR			1.35:1	
Forward Power, CW			10	Watts
Reverse Power, CW			10	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Isolator With 15 dB Isolation From 2 GHz to 8 GHz, 10 Watts And SMA Female PE8316](#)



Isolator With 15 dB Isolation From 2 GHz to 8 GHz, 10 Watts And SMA Female

Isolators Technical Data Sheet

PE8316

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	2 to 2.2	2.2 to 6	6 to 8			GHz
Insertion Loss, Max	1.5	1.1	1.1			dB
Isolation, Min	20	20	15			dB

Electrical Specification Notes:
 Values at 25°C, sea level.

Mechanical Specifications

Size

Length	3.2 in [81.28 mm]
Width	1.75 in [44.45 mm]
Height	0.63 in [16 mm]
Weight	0.55 lbs [249.48 g]

Configuration

Design	Single Junction
Direction	1 to 2
Package Style	Connectorized
Connector 1	SMA Female
Connector 2	SMA Female

Environmental Specifications

Temperature

Operating Range	-20 to +70 deg C
-----------------	------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Isolator With 15 dB Isolation From 2 GHz to 8 GHz, 10 Watts And SMA Female PE8316](#)



Isolator With 15 dB Isolation From 2 GHz to 8 GHz, 10 Watts And SMA Female

Isolators Technical Data Sheet

PE8316

Isolator With 15 dB Isolation From 2 GHz to 8 GHz, 10 Watts And SMA Female from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Isolator With 15 dB Isolation From 2 GHz to 8 GHz, 10 Watts And SMA Female PE8316](#)

URL: <https://www.pasternack.com/50-ohm-sma-isolator-2-8-ghz-10-watts-15-db-pe8316-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE8316 CAD Drawing

Isolator With 15 dB Isolation From 2 GHz to 8 GHz, 10 Watts And SMA Female

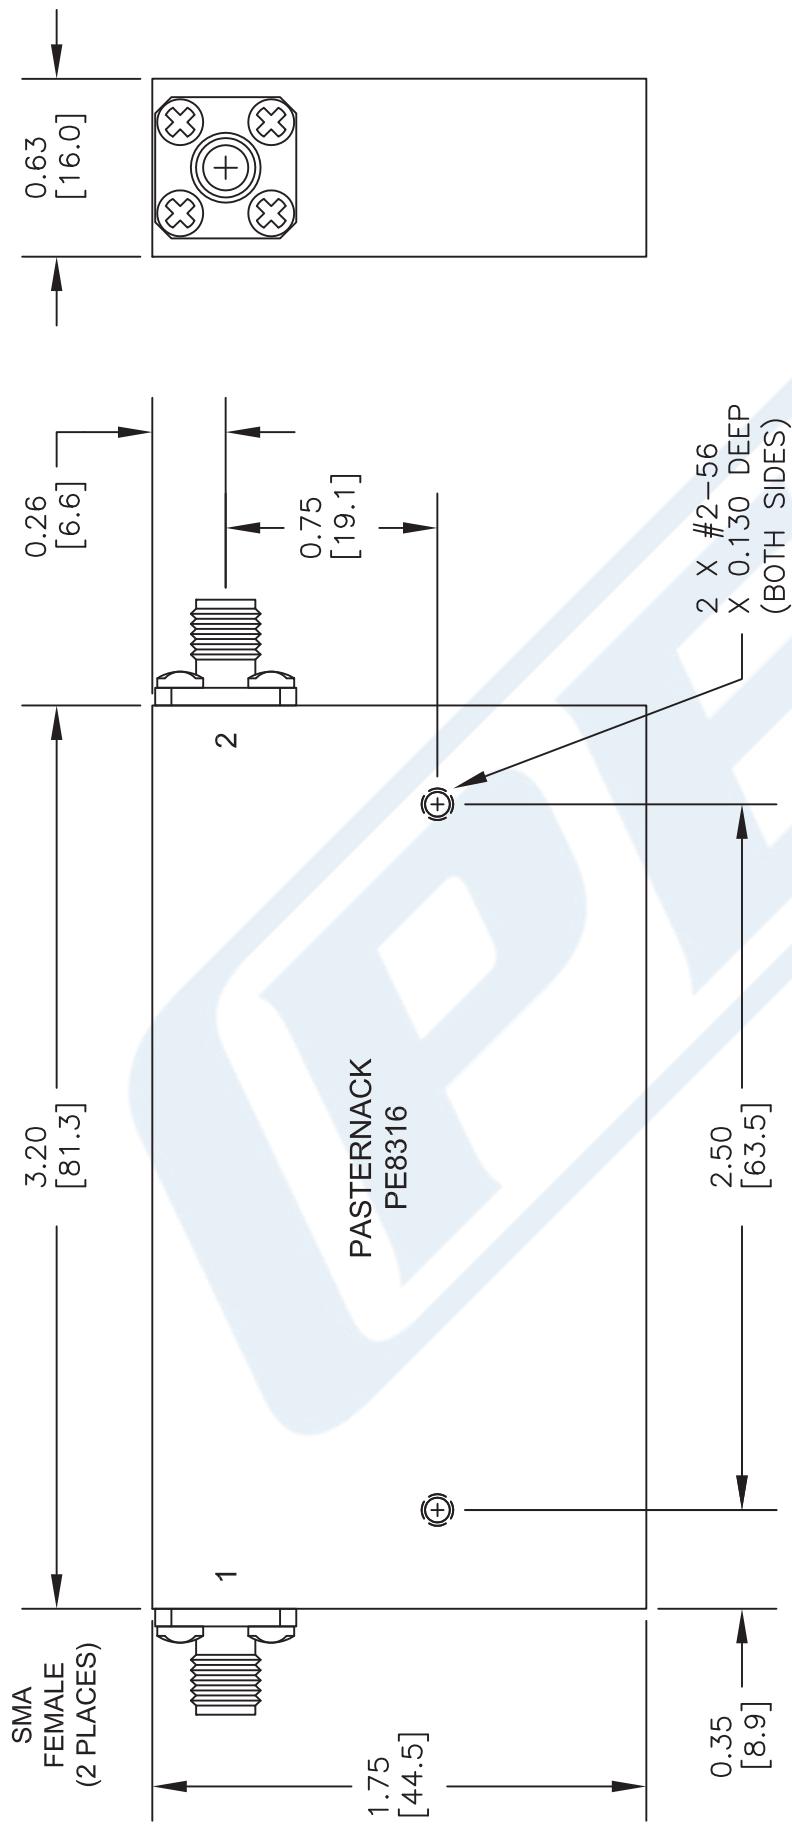

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	PE8316
FSCM NO.	53919
CAD FILE	072716
SCALE	N/A
SIZE	A
	2233

PASTERNACK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com