



2 Way N Power Divider From 2 GHz to 4 GHz Rated at 10 Watts

Power Dividers Technical Data Sheet

PE2034

Features

- 2-Way Power Divider
- Wilkinson Design
- 2 to 4 GHz Frequency Range
- Max Power 10 Watts (CW)
- Insertion Loss < 3.4 dB
- Isolation > 18 dB

Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

Description

Pasternack carries a wide selection of power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase. Pasternack's resistive and Wilkinson power dividers come with excellent performance featuring minimal loss, high isolation and low VSWR. They are available in both narrow and broad bandwidths with a variety of connector types such as 2.92mm, BNC, N and SMA.

The PE2034 is a 2-way Wilkinson power divider that operates from 2 to 4 GHz and can handle up to 10 Watts (CW) with 3.4 dB max insertion loss and 18 dB min isolation. The package interface uses N female connectors and is REACH and RoHS compliant.

Electrical Specifications

Design: Wilkinson
 Number of Output Ports: 2

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		4	GHz
Impedance		50		Ohms
Input VSWR			1.45:1	
Output VSWR			1.45:1	
Insertion Loss			3.4	dB
Isolation	18			dB
Amplitude Balance			0.2	dB
Phase Balance			4	Degrees
Input Power (CW)			10	Watts

Electrical Specification Notes:
 Max input power rated for load VSWR better than 2.0:1.
 Insertion loss includes splitting loss.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way N Power Divider From 2 GHz to 4 GHz Rated at 10 Watts PE2034](#)



2 Way N Power Divider From 2 GHz to 4 GHz Rated at 10 Watts

Power Dividers Technical Data Sheet

PE2034

Mechanical Specifications

Size

Length	1.5 in [38.1 mm]
Width	2 in [50.8 mm]
Height	0.8 in [20.32 mm]
Weight	0.329 lbs [149.23 g]

Configuration

Package Type	Connectorized
Input Connector	N Female
Output Connectors	N Female

Environmental Specifications

Temperature

Operating Range	-30 to +70 deg C
-----------------	------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

2 Way N Power Divider From 2 GHz to 4 GHz Rated at 10 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way N Power Divider From 2 GHz to 4 GHz Rated at 10 Watts PE2034](#)

URL: <https://www.pasternack.com/8-way-n-reactive-power-divider-2-ghz-4-ghz-10-watts-pe2034-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE2034 CAD Drawing

2 Way N Power Divider From 2 GHz to 4 GHz Rated at 10 Watts

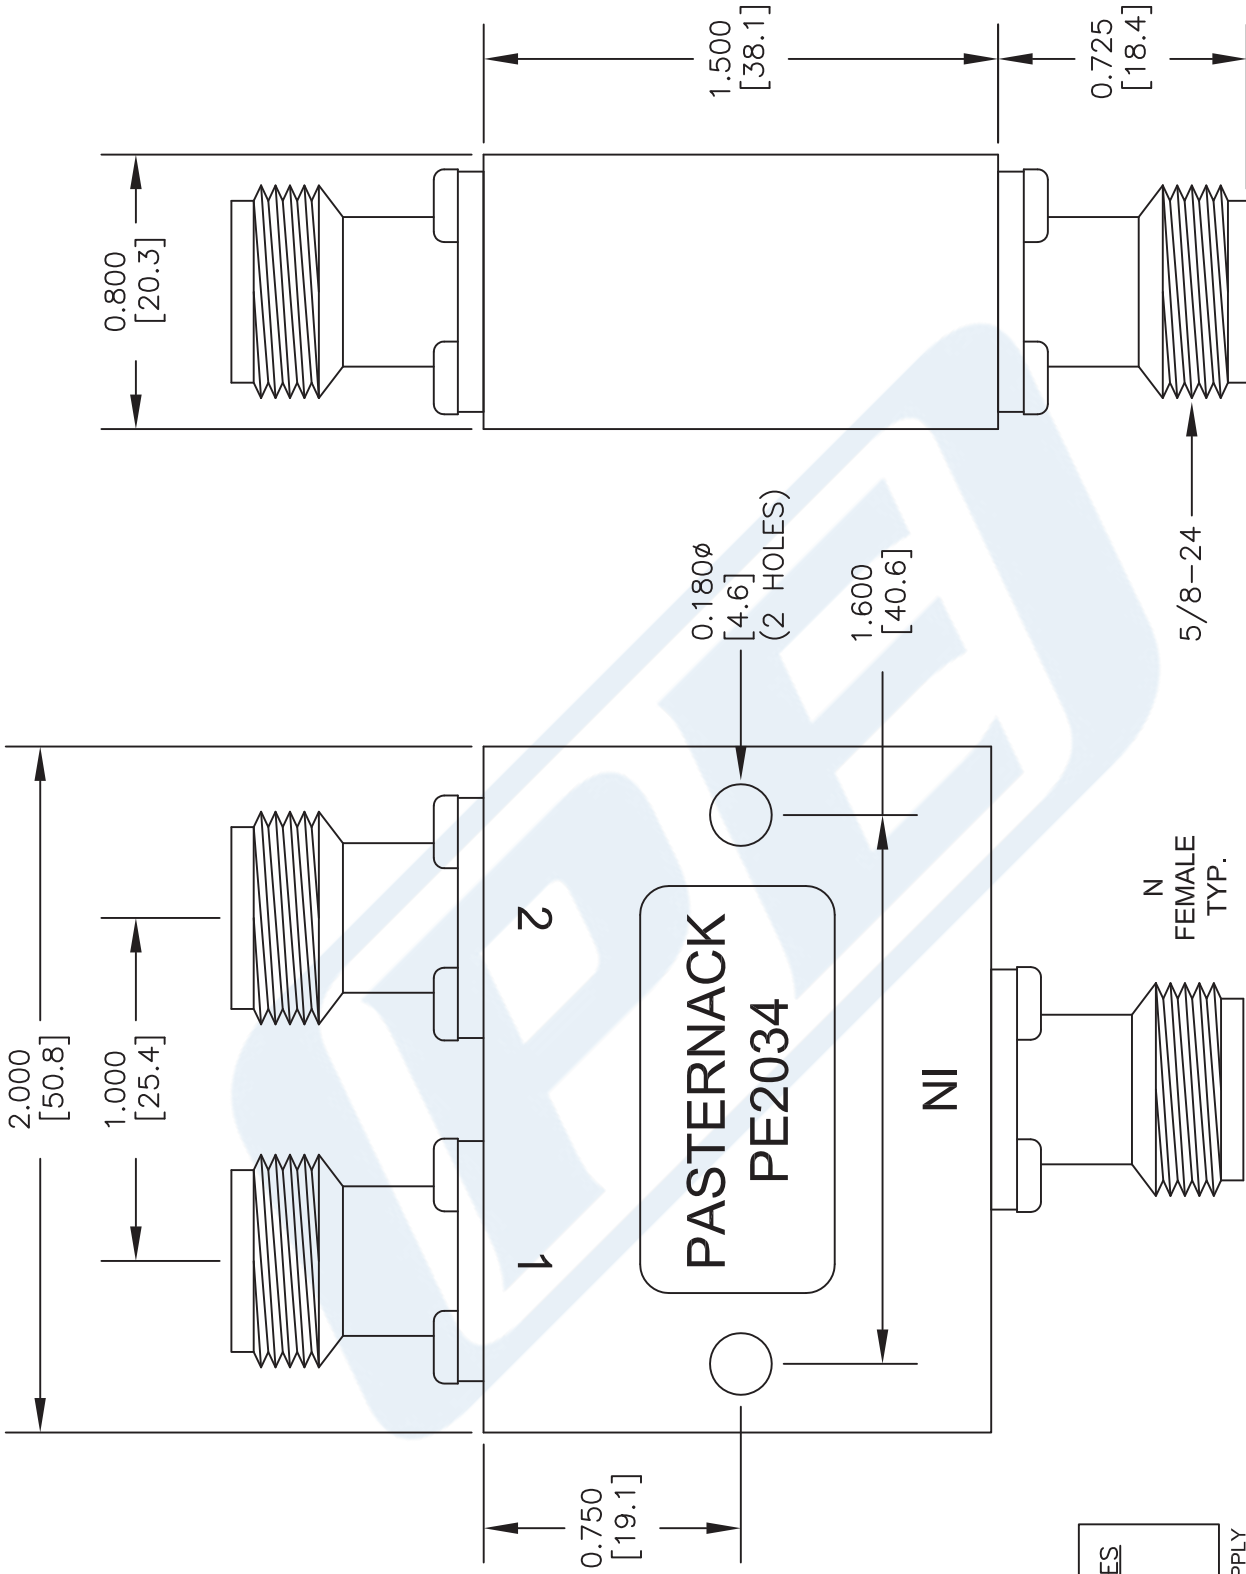

STANDARD TOLERANCES
 DECIMAL ±0.01
 .XX ±0.005
 .XXX ±0.005
 *STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE2034
 CAGE CODE 53919
 CAD FILE 020617
 SCALE N/A
 SIZE A
 2233

(PE) PASTERNAK®
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com