



## 55 Watts WR-51 RF Load Up To 18 GHz

### TECHNICAL DATA SHEET

PE6821

#### 55 Watts WR-51 RF Load Up To 18 GHz

##### Configuration

Connector	WR-51
Heat Sink	Aluminum

##### Electrical Specifications

Frequency Range, GHz	15 to 18
Impedance, Ohms	50
Maximum VSWR	1.07:1
Maximum Input Power, Watts	55

##### Mechanical Specifications

###### Size

Length, in [mm]	4 [101.6]
Width/Dia., in [mm]	1.325 [33.66]
Height, in [mm]	1.325 [33.66]

###### Connector

Type	WR-51
------	-------

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

##### Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------


55 Watts WR-51 RF Load Up To 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [55 Watts WR-51 RF Load Up To 18 GHz PE6821](#)

URL: <http://www.pasternack.com/medium-power-waveguide-termination-frequency-range-1500-2200-ghz-pe6821-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

**PE6821 CAD Drawing**  
55 Watts WR-51 RF Load Up To 18 GHz

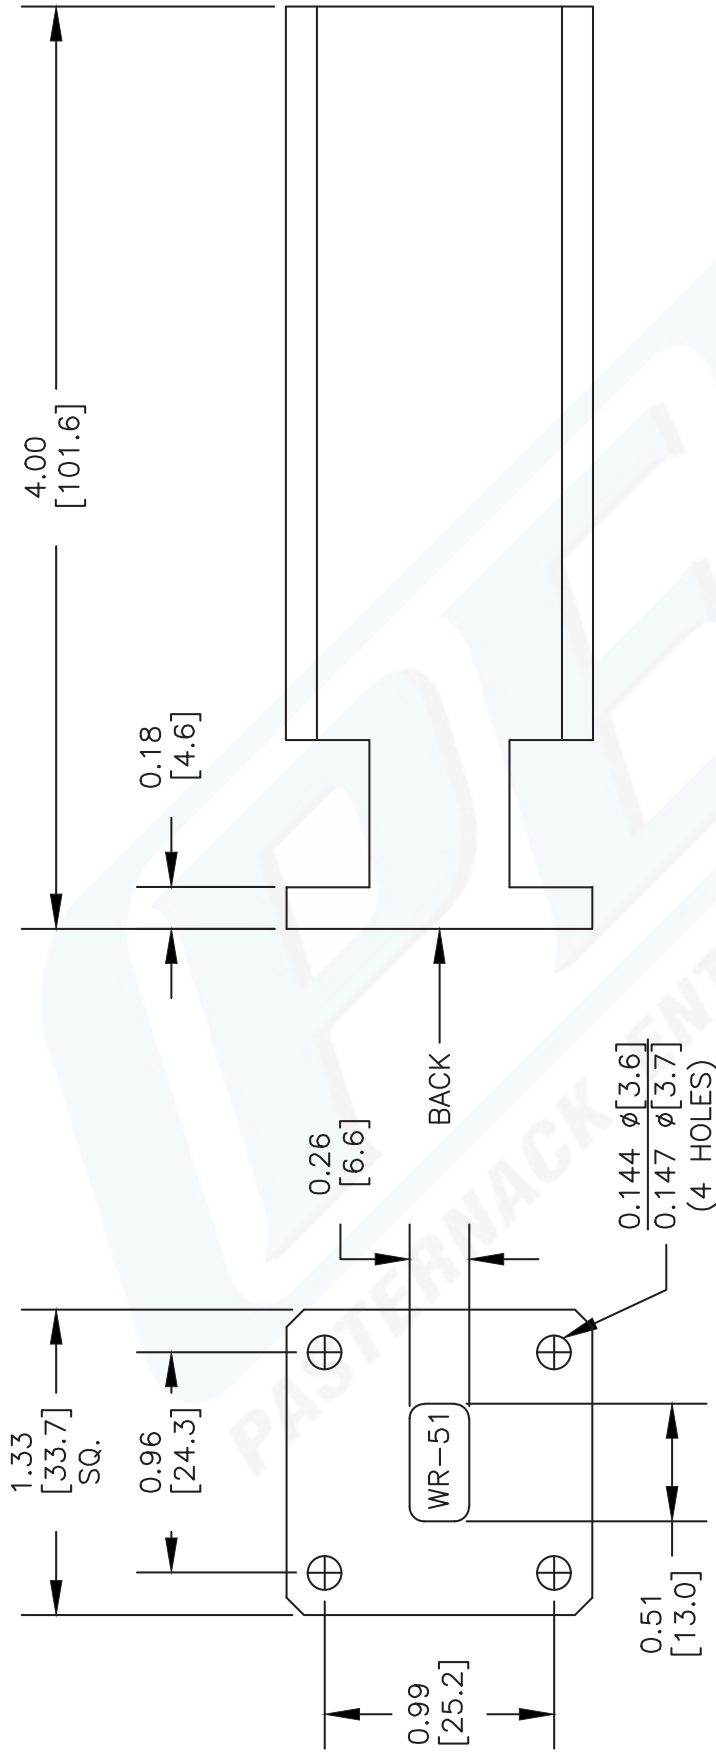

BACK VIEW

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE6821**

FSCM NO. 53919

127

SIZE A

SCALE N/A

CAD FILE 061804

**PE PASTERNAK®**  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com