

WR-430 Waveguide Standard Gain Horn Antenna

Operating From 1.7 GHz to 2.6 GHz With a
Nominal 20 dBi Gain With CPR-430F Flange

Gain Horns Technical Data Sheet

PE9864-20

Features

- Rectangular Waveguide Interface
- 1.7 GHz to 2.6 GHz
- 20 dBi Nominal Gain
- CPR-430F Flange

Applications

- Antenna Measurements
- Laboratory Use
- Wireless Communication
- Microwave Radio Systems

Description

Pasternack's PE9864-20 WR-430 waveguide standard gain horn antenna operating from 1.7 GHz to 2.6 GHz with a nominal 20 dBi gain is part of our full line of RF components available for same-day shipping. This Pasternack pyramidal horn antenna has a lightweight anodized aluminum body and a precision tolerance CPR-430F flange. The PE9864-20 WR-430 waveguide standard gain horn antenna offers low gain variation across its operating frequency range and 17.4 degrees of half power beam width.

Waveguide standard gain horn antennas are used in a wide variety of applications due to their high power handling capability, low loss, high directivity, and near constant electrical performance across a broad bandwidth. Pasternack's WR-430 standard gain horns are available in 10, 15 and 20 dB models with pyramidal shape and rectangular waveguide input.

Configuration

Design	WR-430 Standard Gain Horn
Pattern	Directional
Polarization	Linear

Electrical Specifications


Description	Minimum	Typical	Maximum	Units
Frequency Range	1.7		2.6	GHz
Nominal Gain		20		dBi
Horizontal Half Power Beam Width		17.4		Degrees
Vertical Half Power Beam Width		17.3		Degrees

Electrical Specification Notes:
Half power beam width is calculated by computer simulation.

Mechanical Specifications

Size	
Length	40.5 in [102.87 cm]
Width	22.25 in [565.15 mm]
Height	16.2 in [411.48 mm]
Weight	22.65 lbs [10.27 Kg]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-430 Waveguide Standard Gain Horn Antenna Operating From 1.7 GHz to 2.6 GHz With a Nominal 20 dBi Gain With CPR-430F Flange PE9864-20](#)



WR-430 Waveguide Standard Gain Horn Antenna
Operating From 1.7 GHz to 2.6 GHz With a
Nominal 20 dBi Gain With CPR-430F Flange

Gain Horns Technical Data Sheet

PE9864-20

Waveguide Interface

Waveguide Size

WR-430

Flange Type

CPR-430F

Body Material and Plating

Anodized Aluminum, Paint


Environmental Specifications

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:

Typical Performance Data

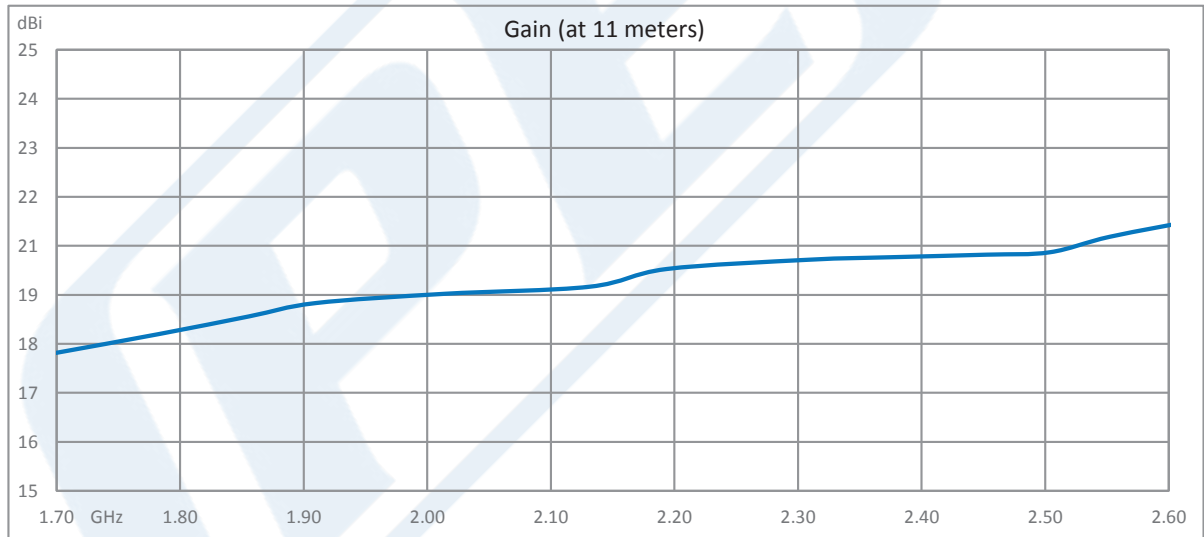

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-430 Waveguide Standard Gain Horn Antenna Operating From 1.7 GHz to 2.6 GHz With a Nominal 20 dBi Gain With CPR-430F Flange PE9864-20](#)



WR-430 Waveguide Standard Gain Horn Antenna
Operating From 1.7 GHz to 2.6 GHz With a
Nominal 20 dBi Gain With CPR-430F Flange

Gain Horns Technical Data Sheet

PE9864-20

WR-430 Waveguide Standard Gain Horn Antenna Operating From 1.7 GHz to 2.6 GHz With a Nominal 20 dBi Gain With CPR-430F Flange from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.






Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-430 Waveguide Standard Gain Horn Antenna Operating From 1.7 GHz to 2.6 GHz With a Nominal 20 dBi Gain With CPR-430F Flange PE9864-20](#)

URL: <https://www.pasternack.com/standard-gain-horn-waveguide-size-wr430-pe9864-20-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9864-20 CAD Drawing

WR-430 Waveguide Standard Gain Horn Antenna Operating From 1.7 GHz to 2.6 GHz With a Nominal 20 dBi Gain With CPR-430F Flange

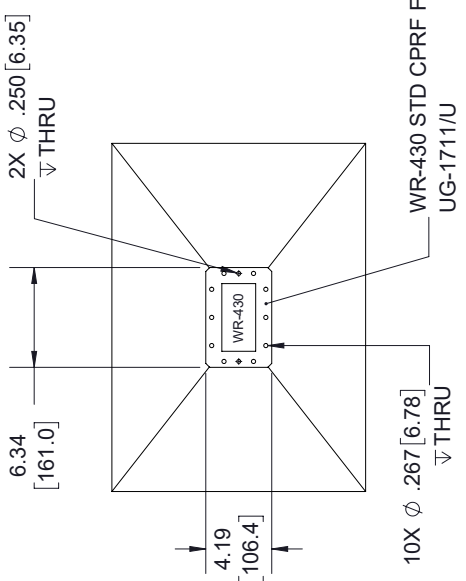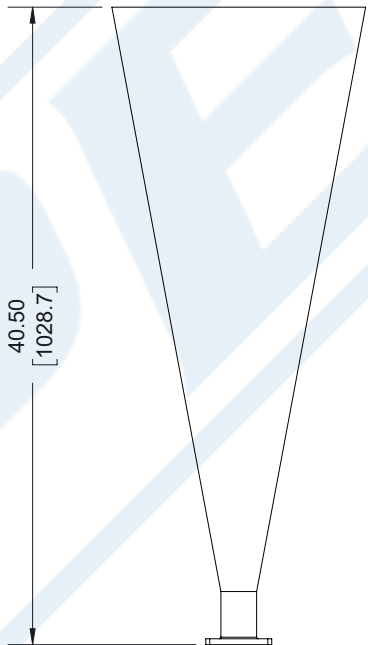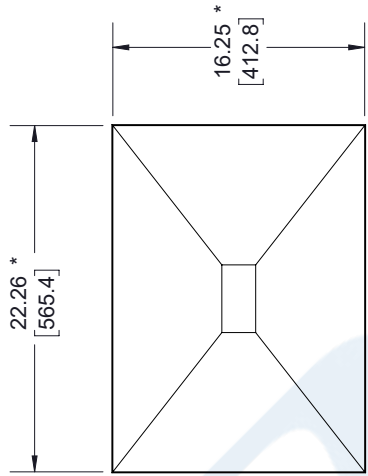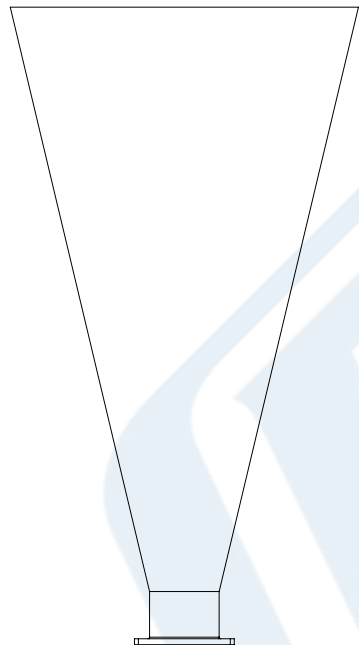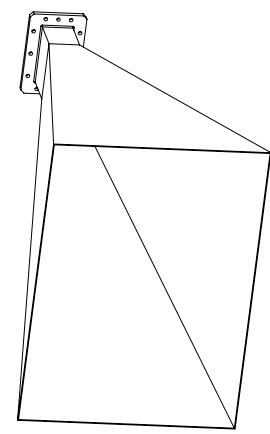

STANDARD TOLERANCES	
.X	± 0.2
.XX	± 0.01
.XXX	± 0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

* INSIDE DIMENSION

<p>PE PASTERNAK THE ENGINEER'S RF SOURCE Pasternack Enterprises, Inc. P.O. Box 16759 Irvine CA 92623 Phone: (949) 261-1920 Fax: (949) 261-7451 Website: www.pasternack.com E-Mail: sales@pasternack.com</p>	DWG TITLE	PE9864-20	CAD FILE	06/06/18	SCALE	N/A	SIZE	A	7361
	NOTES:		1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
CAGE CODE		53919							