



50 dB Gain, 28 dBm IP3, 1 dB NF, 18 dBm P1dB, 10 MHz to 1 GHz, Low Noise High Gain Amplifier SMA

TECHNICAL DATA SHEET

PE15A1013

PE15A1013 is a wideband low noise RF coaxial power amplifier operating in the 10 MHz to 1 GHz frequency range. The amplifier offers 1 dB typical noise figure, 18 dBm of P1dB and 50 dB small signal gain with gain flatness of ± 1.25 dB. This exceptional technical performance is achieved through the use of hybrid MIC design and advanced GaAs PHEMT devices. The low noise amplifier requires typically a +12V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation, bias sequencing, and reverse bias protection for added reliability. The amplifier operates over the temperature range of -40°C and $+85^{\circ}\text{C}$.

Features

- 10 MHz to 1 GHz Frequency Range
- P1dB: 18 dBm
- Flat Small Signal Gain: 50 dB
- Gain Flatness: ± 1.25 dB
- Gain Variance over OTR: ± 1.5 dB
- Noise Figure: 1 dB typ
- Reverse Isolation: 65 dB
- 50 Ohm Input and Output Matched
- -40 to 85°C Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply
- Built-in Voltage Regulator

Applications

- Laboratory Applications
- R&D Labs
- Military Radio
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Military & Space
- Communication Systems
- Wireless Communication
- Microwave Radio Systems
- Cellular Base Stations
- Low Noise Amplifier
- General Purpose Amplification
- General Purpose Wireless
- Wideband Gain Block
- IF Amplifier/RF Driver Amplifier
- RF Wideband Front Ends
- RF Pre-amplification

Electrical Specifications (TA = $+25^{\circ}\text{C}$, DC Voltage = 12Vdc, DC Current = 140mA)

| Description | Minimum | Typical | Maximum | Units |
|------------------------------------|---------|------------|-----------|--------------------|
| Frequency Range | 10 | | 1,000 | MHz |
| Small Signal Gain | 47 | 50 | 54 | dB |
| Gain Flatness | | ± 1.25 | ± 1.5 | dB |
| Gain Variance at OTR* | | ± 1.5 | | dB |
| Output at 1 dB Compression Point | +16 | +18 | | dBm |
| Output 3rd Intercept Point | +26 | +28 | | dBm |
| Noise Figure (50 MHz to 1,000 MHz) | | 1 | 1.1 | dB |
| Input VSWR | | 1.5:1 | 1.7:1 | |
| Output VSWR | | 1.6:1 | 1.8:1 | |
| Reverse Isolation | 60 | 65 | | dB |
| Spurious | | | -70 | dBc |
| Operating DC Voltage | 10 | 12 | 15 | Volts |
| Operating DC Current | 120 | 140 | 160 | mA |
| Operating Temperature Range | -40 | | +85 | $^{\circ}\text{C}$ |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 dB Gain, 28 dBm IP3, 1 dB NF, 18 dBm P1dB, 10 MHz to 1 GHz, Low Noise High Gain Amplifier SMA PE15A1013](#)



50 dB Gain, 28 dBm IP3, 1 dB NF, 18 dBm P1dB, 10 MHz to 1 GHz, Low Noise High Gain Amplifier SMA

TECHNICAL DATA SHEET

PE15A1013

*OTR= Base Plate Operating Temperature Range

Absolute Maximum Rating

| Parameter | Rating | Units |
|------------------------------------|-------------|-------|
| Source Voltage | +15 | Volts |
| RF input Power | +13 | dBm |
| Operating Temperature (base-plate) | -55 to +125 | °C |
| Storage Temperature | -40 to +85 | °C |



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Mechanical Specifications

Size

| | |
|------------------|---------------------|
| Length | 1.5 in [38.1 mm] |
| Width | 0.85 in [21.59 mm] |
| Height | 0.375 in [9.53 mm] |
| Weight | 0.053 lbs [24.04 g] |
| Input Connector | SMA Female |
| Output Connector | SMA Female |

Environmental Specifications

Temperature

| | |
|-----------------|-------------------|
| Operating Range | -40 to +85 deg C |
| Storage Range | -55 to +125 deg C |

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 dB Gain, 28 dBm IP3, 1 dB NF, 18 dBm P1dB, 10 MHz to 1 GHz, Low Noise High Gain Amplifier SMA PE15A1013](#)





50 dB Gain, 28 dBm IP3, 1 dB NF, 18 dBm P1dB, 10 MHz to 1 GHz, Low Noise High Gain Amplifier SMA

TECHNICAL DATA SHEET

PE15A1013

Typical Performance Data

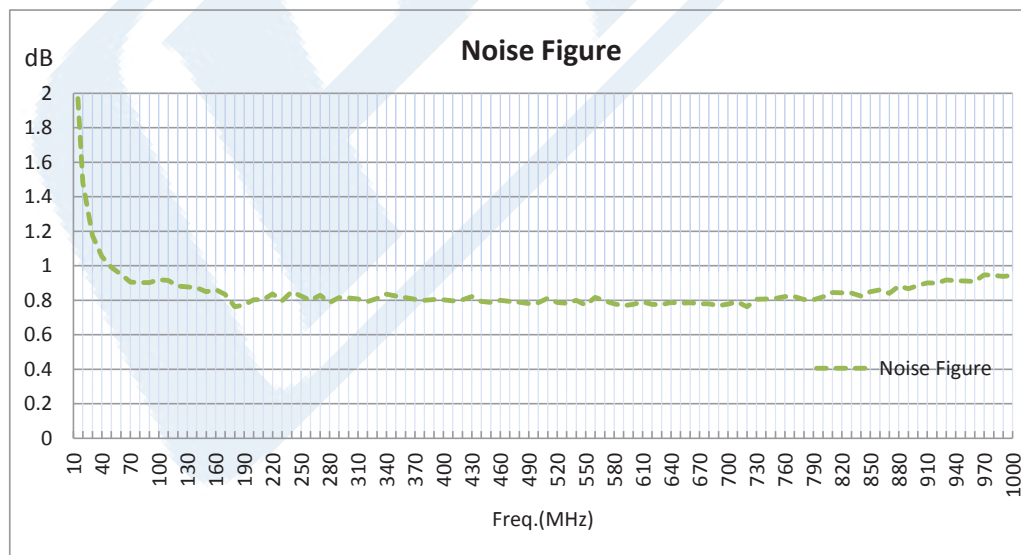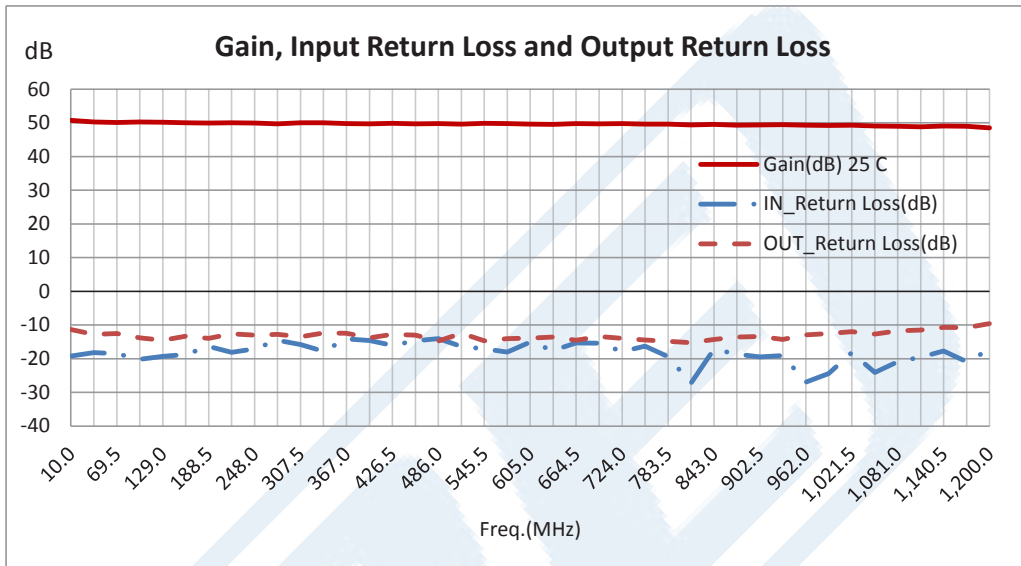

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 dB Gain, 28 dBm IP3, 1 dB NF, 18 dBm P1dB, 10 MHz to 1 GHz, Low Noise High Gain Amplifier SMA PE15A1013](#)



50 dB Gain, 28 dBm IP3, 1 dB NF, 18 dBm P1dB, 10 MHz
to 1 GHz, Low Noise High Gain Amplifier SMA

TECHNICAL DATA SHEET

PE15A1013

50 dB Gain, 28 dBm IP3, 1 dB NF, 18 dBm P1dB, 10 MHz to 1 GHz, Low Noise High Gain Amplifier SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 dB Gain, 28 dBm IP3, 1 dB NF, 18 dBm P1dB, 10 MHz to 1 GHz, Low Noise High Gain Amplifier SMA PE15A1013](https://www.pasternack.com/50-db-gain-1000-mhz-low-noise-high-gain-amplifier-sma-pe15a1013-p.aspx)

URL: <https://www.pasternack.com/50-db-gain-1000-mhz-low-noise-high-gain-amplifier-sma-pe15a1013-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A1013 CAD Drawing

50 dB Gain, 28 dBm IP3, 1 dB NF, 18 dBm P1dB, 10 MHz to 1 GHz, Low Noise High Gain Amplifier SMA

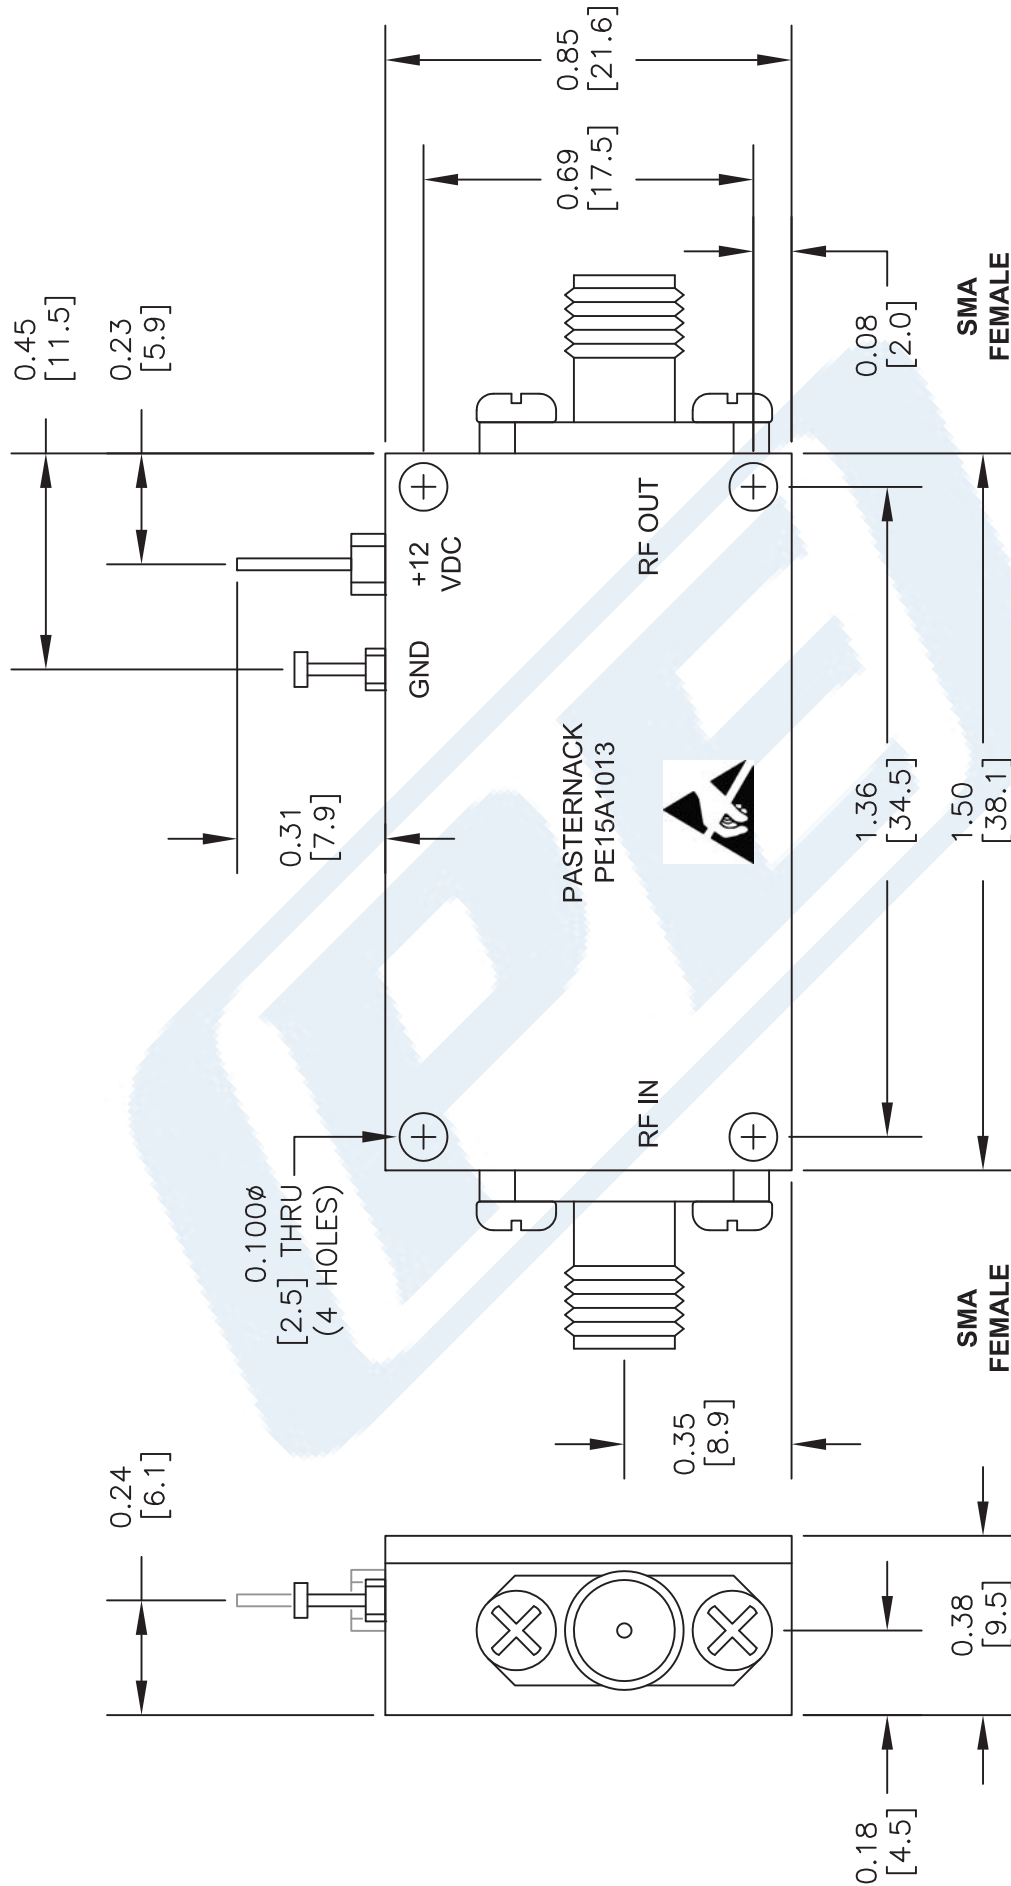

DWG TITLE

PE15A1013

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 021714

SCALE N/A

SIZE A

2233



PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com