



1 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 33 dB Gain, 39 dBm IP3, 5 dB NF, SMA

TECHNICAL DATA SHEET

PE15A4005

PE15A4005 is a 1W wideband coaxial power amplifier operating in the 2 to 6 GHz frequency range. The amplifier offers 30 dBm min of P1dB and 33 dB small signal gain with the excellent gain flatness of ± 1.0 dB max and an outstanding output IP3 performance of 39 dBm. This performance is achieved through the use of hybrid MIC design and advanced GaAs PHEMT devices. The amplifier requires typically a +12V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation, bias sequencing, and reverse bias protection for added reliability. The amplifier operates over the temperature range of -55°C and $+85^{\circ}\text{C}$.

Features

- 2 GHz to 6 GHz Frequency Range
- P1dB: 30 dBm min
- Small Signal Gain: 33 dB Typical
- Excellent Gain Flatness: ± 1.0 dB max
- High output IP3: 39 dBm
- Noise Figure: 5 dB
- Reverse Isolation: 50 dB
- 50 Ohms Input and Output Matched
- -55 to $+85^{\circ}\text{C}$ Operating Temperature
- Unconditionally Stable
- Regulated Supply & Bias Sequencing
- Hermetically Sealed Module
- Overvoltage External Protection for Easy Repair

Applications

- Electronic Warfare
- Electronic Countermeasures
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Military & Space
- Communication Systems
- Satellite Communications
- Microwave Radio Systems
- Driver Amplifier
- High Power Output Amplifier

Electrical Specifications (TA= 25°C, VDC1 = 12 Vdc)

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		6	GHz
Gain	31	33		dB
Small Signal Gain at OTR*	30			dB
Gain Flatness			± 1	dB
Output at 1 dB Compression Point	+30			dBm
Output 3 rd Intercept Point		+39		dBm
Reverse Isolation		50		dB
Noise Figure		5	5.5	dB
Noise Figure at OTR*			6	dB
Input VSWR			2:1	
Output VSWR			2:1	
Operating DC Voltage 1	11	12	15	Volts
Operating DC Current		1,000		mA
Operating Temperature Range (OTR)	-55		+85	$^{\circ}\text{C}$

*OTR= Base Plate Operating Temperature Range

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 33 dB Gain, 39 dBm IP3, 5 dB NF, SMA PE15A4005](#)



1 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 33 dB Gain, 39 dBm IP3, 5 dB NF, SMA

TECHNICAL DATA SHEET

PE15A4005

Absolute Maximum Rating

Parameter	Rating	Units
Source Voltage	+15	Volts
RF input Power	+17	dBm
Operating Temperature (base-plate)	-55 to +85	°C
Storage Temperature	-65 to +95	°C



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Mechanical Specifications

Size

Length	1.837 in [46.66 mm]
Width	1.15 in [29.21 mm]
Height	0.67 in [17.02 mm]
Weight	0.164 lbs [74.39 g]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-55 to +85 deg C
-----------------	------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
- Heat Sink Required for Proper Operation, Unit is cooled by conduction to heat sink.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 33 dB Gain, 39 dBm IP3, 5 dB NF, SMA PE15A4005](#)





1 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 33 dB Gain, 39 dBm IP3, 5 dB NF, SMA

TECHNICAL DATA SHEET

PE15A4005

Typical Performance Data

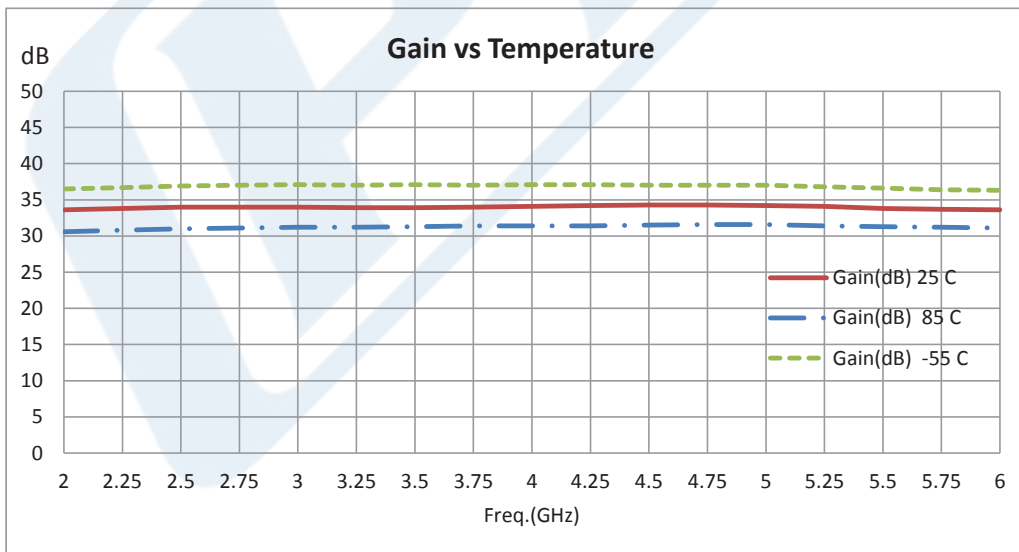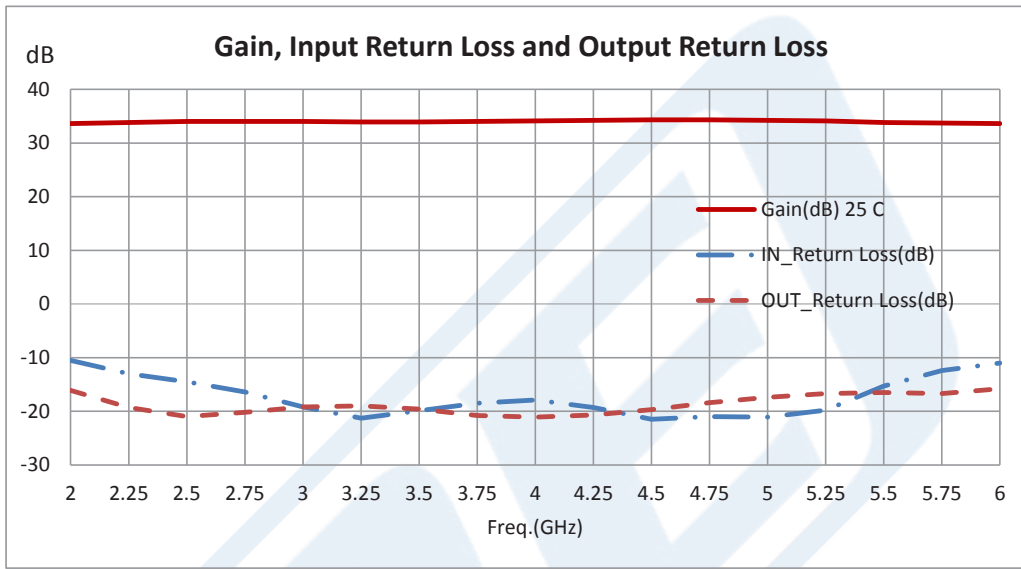



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 33 dB Gain, 39 dBm IP3, 5 dB NF, SMA PE15A4005](#)



1 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 33 dB Gain, 39 dBm IP3, 5 dB NF, SMA

TECHNICAL DATA SHEET

PE15A4005

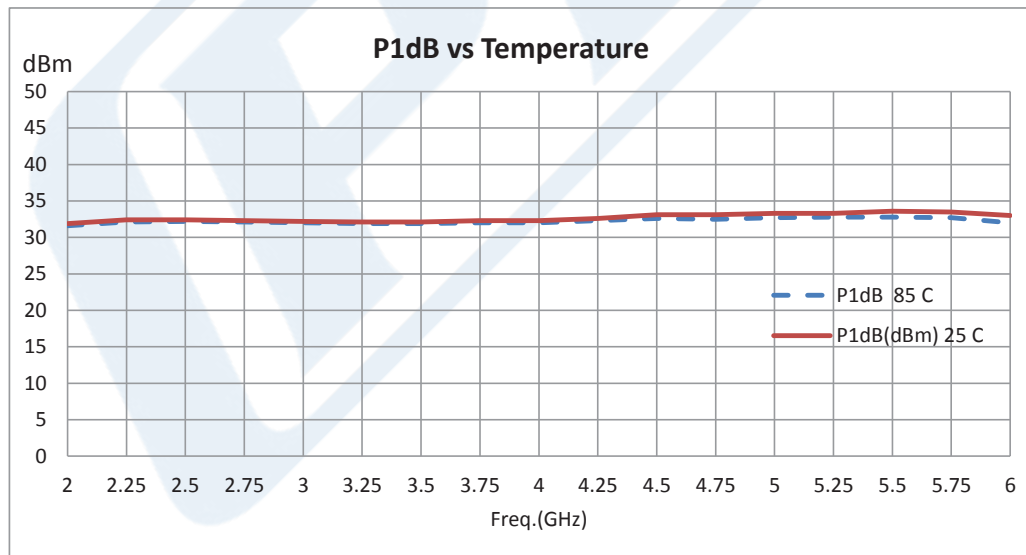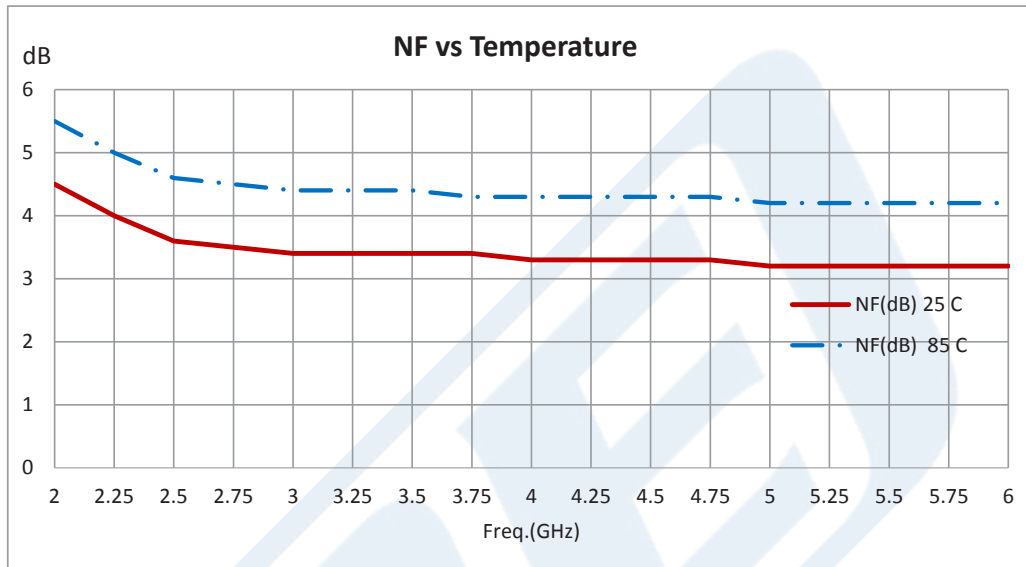

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 33 dB Gain, 39 dBm IP3, 5 dB NF, SMA PE15A4005](#)



1 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband
Amplifier, 33 dB Gain, 39 dBm IP3, 5 dB NF, SMA

TECHNICAL DATA SHEET

PE15A4005

1 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 33 dB Gain, 39 dBm IP3, 5 dB NF, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.




Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 33 dB Gain, 39 dBm IP3, 5 dB NF, SMA PE15A4005](https://www.pasternack.com/6-ghz-medium-power-broadband-amplifier-33-db-gain-5-db-nf-sma-pe15a4005-p.aspx)

URL: <https://www.pasternack.com/6-ghz-medium-power-broadband-amplifier-33-db-gain-5-db-sma-pe15a4005-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A4005 CAD Drawing

1 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 33 dB Gain, 39 dBm IP3, 5 dB NF, SMA

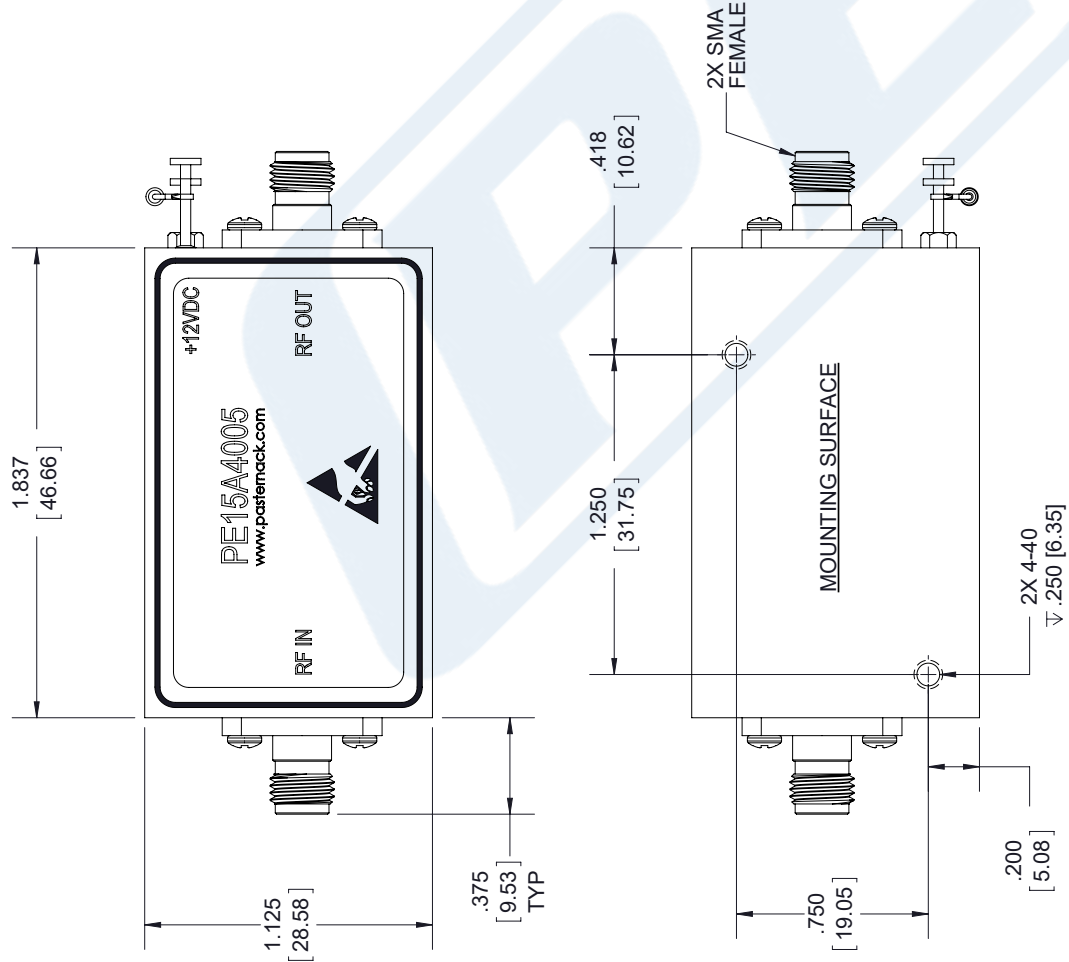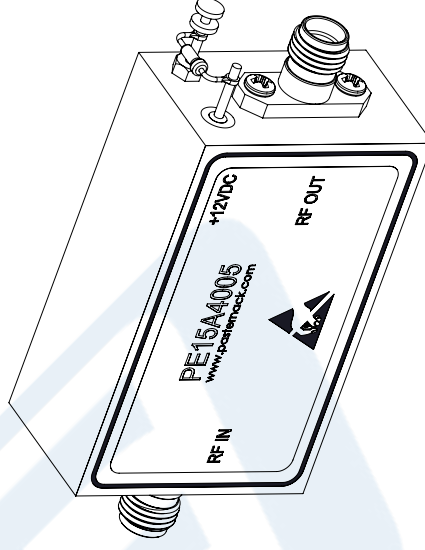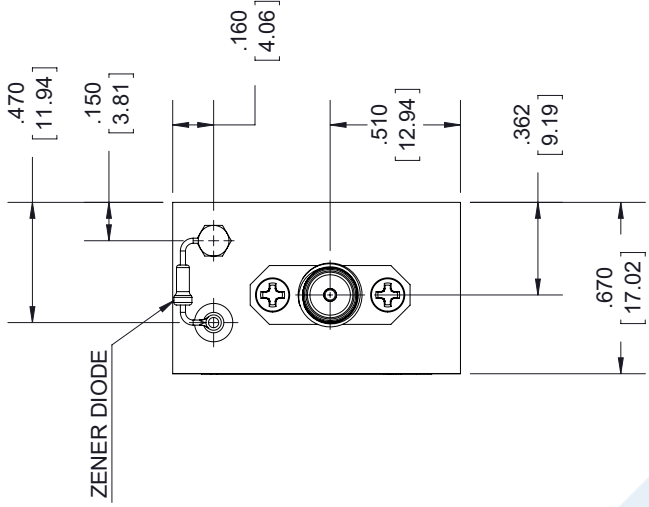

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE	PE15A4005
CAGE CODE	53919

NOTES:	1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
	2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
	3. DIMENSIONS ARE IN INCHES [mm].
CAD FILE	072617
SCALE	N/A
SIZE	A
	9999