

Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 195 MHz to 240 MHz, Phase Noise of -125 dBc/Hz and 0.5 inch Package



Voltage Control Oscillators Technical Data Sheet

PE1V12001

Features

- · 195 to 240 MHz Bandwidth
- -125 dBc/Hz @ 10kHz offset
- Tuning Voltage 0V to 15V
- Pout = +8.5 dBm
- Harmonics = -15 dBc
- · Seperate Modulation Port

• Electronic Jamming Equipment

- Local Oscillator
- · Wireless Communications
- SATCOM

- RoHs Compliant Assembly
- 0.5" SMT package
- Industry Standard Mounting Footprint
- Designed to meet MIL-STD-202 Environmental Conditions

Applications

- · Phase Locked Loop
- · Function Generators
- Frequency Synthesizers
- Receivers

- Optical Communications
- · Military Electronic Systems
- · Transmit Modulation

Description

The PE1V12001 is a High Reliability Low Noise Voltage Controlled Oscillator (VCO) which covers a 195 MHz to 240 MHz frequency band with a voltage tuning range from 0V to 15V. This design features exceptional phase noise performance of -125 dBc/Hz @ 10 kHz offset. Supply Voltage is +5V with a generated output power level of +8.5 dBm and 2nd harmonic output of -15 dBc typical. The VCO has a separate modulation port for increased design flexibility and ideal for transmit applications. The assembly is RoHs compliant and available in a compact 0.5 inch SMT package with an industry standard mounting footprint. The bottom surface is copper clad with 2-5 micro inches of immersion Gold over 150 - 250 micro inches of Electro less Nickel which makes it resistant to oxidation for ease of soldering. The VCO operates over a temperature range of -40°C to +85°C and is designed to meet a variety of MIL-STD-202 test conditions including Humidity, Shock, and Vibration.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	195		240	MHz
Tuning Voltage	0		15	Vdc
Supply Voltage (DC)	4.5	5	5.5	Vdc
Supply Current (DC)		20	22	mA
Phase Noise @ 1kHz Offset		-98	-93	dBc/Hz
Phase Noise @ 10kHz Offset		-125	-123	dBc/Hz
Phase Noise @ 100kHz Offset		-146	-142	dBc/Hz
Modulation Sensitivity		-40 to -20		kHz/Volt
Output Power	+8	+8.5	+9	dBm
Output Power Delta @-40 deg C			-0.8	dBm
Output Power Delta @+85 deg C			+0.5	dBm
Tuning Sensitivity (Kvco)	2		6	MHz/V
Pushing		0.2	0.5	MHz/V
Pulling (pk-pk)		50	100	KHz

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 195 MHz to 240 MHz, Phase Noise of -125 dBc/Hz and 0.5 inch Package PE1V12001

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com



Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 195 MHz to 240 MHz, Phase Noise of -125 dBc/Hz and 0.5 inch Package



Voltage Control Oscillators Technical Data Sheet

PE1V12001

330		pF
50		Ohms
	2	MHz
	-2400	KHz
-15	-12	dBc
	50	50 2 -2400

Mechanical Specifications

Size

Length Width Height

Weight

Body Material and Plating

Design

0.5 in [12.7 mm] 0.5 in [12.7 mm] 0.162 in [4.11 mm]

0.01 lbs [4.54 g]

Copper Clad, Nickel, Gold

Commercial

Environmental Specifications

Temperature

Operating Range Storage Range

Humidity Shock

Temperature Cycle **ESD Sensitivity**

Vibration

-40 to +85 deg C -55 to +125 deg C

MIL-STD-202, Method 103, 90% RH, +65 C

MIL-STD-202, Method 213I MIL-STD-202, Method 204D MIL-STD-202, Method 107B

ESD Sensitive Material, Transport material in Approved

ESD bags. Handle only in ESD Workstation.



Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant

12/17/2015

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 195 MHz to 240 MHz, Phase Noise of -125 dBc/Hz and 0.5 inch Package PE1V12001

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com




Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 195 MHz to 240 MHz, Phase Noise of -125 dBc/Hz and 0.5 inch Package




Voltage Control Oscillators Technical Data Sheet

PE1V12001

Typical Performance Data

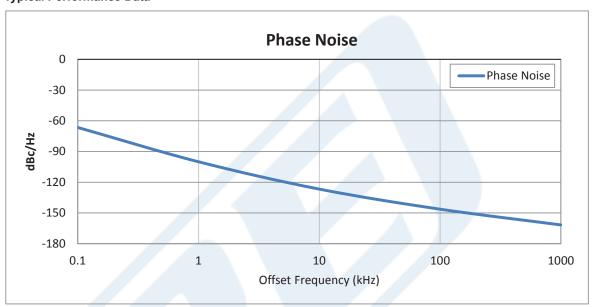

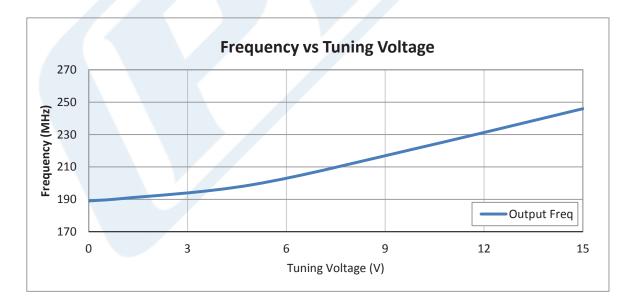

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 195 MHz to 240 MHz, Phase Noise of -125 dBc/Hz and 0.5 inch Package PE1V12001

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451



Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 195 MHz to 240 MHz, Phase Noise of -125 dBc/Hz and 0.5 inch Package



Voltage Control Oscillators Technical Data Sheet

PE1V12001

Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 195 MHz to 240 MHz, Phase Noise of -125 dBc/Hz and 0.5 inch Package from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 195 MHz to 240 MHz, Phase Noise of -125 dBc/Hz and 0.5 inch Package PE1V12001

URL: http://www.pasternack.com/surface-mount-smt-voltage-controlled-oscillator-vco-240-mhz-pe1v12001-p.aspx


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com


PE1V12001 CAD Drawing

Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 195 MHz to 240 MHz, Phase Noise of -125 dBc/Hz and 0.5 inch Package

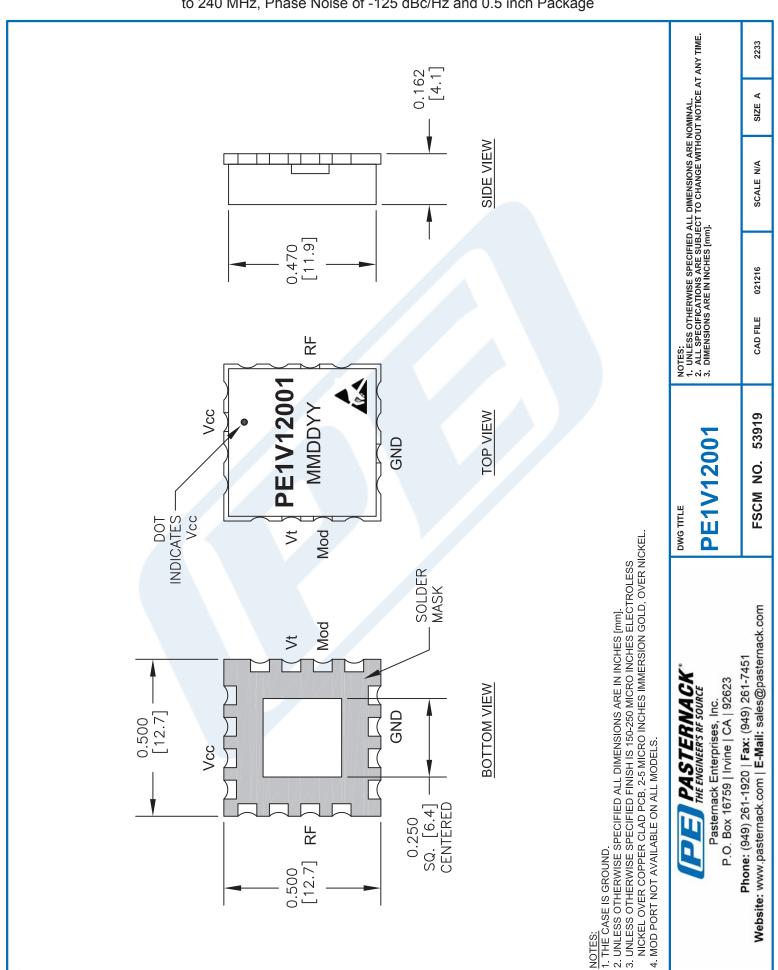

PE1V12001 CAD Drawing

Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 195 MHz to 240 MHz, Phase Noise of -125 dBc/Hz and 0.5 inch Package

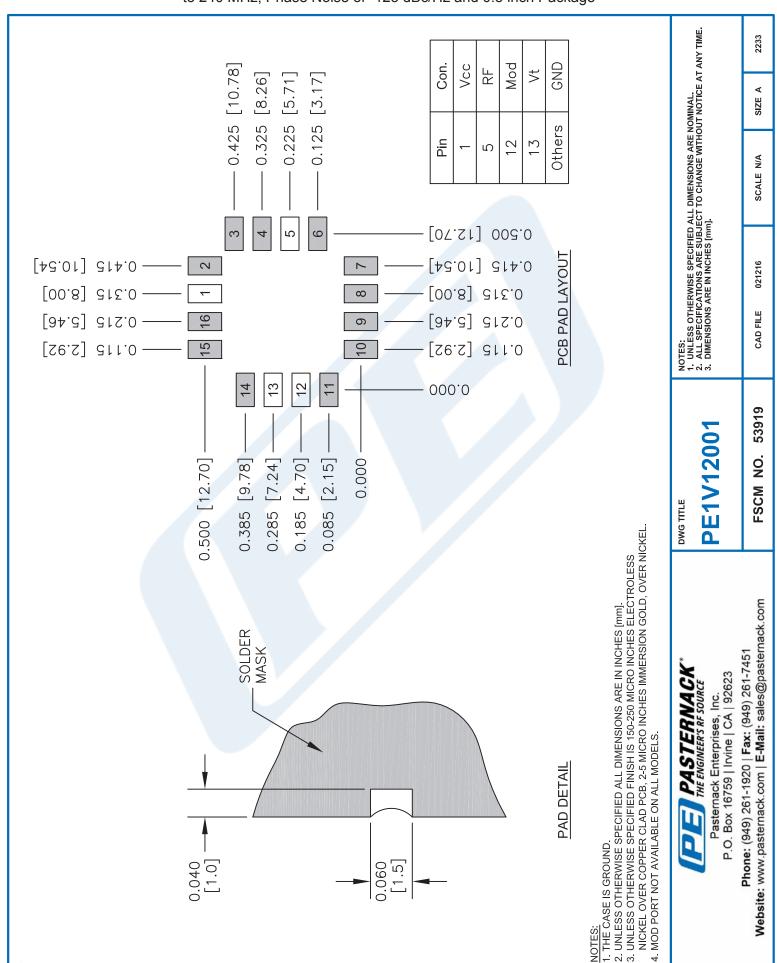

PE1V12001 CAD Drawing

Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 195 MHz to 240 MHz, Phase Noise of -125 dBc/Hz and 0.5 inch Package

