

RF Cable Assemblies Technical Data Sheet

Configuration

- · Connector 1: 3.5mm Male
- Connector 2: 3.5mm Female
- Cable Type: PE-FF430

Features

- Excellent VSWR and Insertion Loss
- Excellent Amplitude and Phase Stability with Flexure
- · Rugged Armor provides crush and torque resistence
- UV resistant jacket
- · Each serialized assembly includes test data
- · In stock and ready to ship

Applications

- · Field Testing
- Tower Measurements
- Base Station Analyzers
- Handheld Network Analyzers
- Portable Spectrum Analyzers
- Site Maintenance
- Distance-To-Fault Measurements

Description

Pasternack's Handheld RF Analyzer Phase Stable cable assemblies are designed for use with portable and handheld network analyzers, spectrum analyzers and base station analyzers. These rugged portable analyzer cable assemblies offer a unique combination of low loss, phase stability, low VSWR and durability. The tough analyzer cable armor offers crush resistance, torque resistance, water resistance and UV resistance while still maintaining a high level of flexibility. These rugged handheld analyzer cable assemblies are compatible with Fieldfox®, Site Master, CellAdvisor® and Sitehawk® analyzers, supporting site maintenance, field testing, antenna testing and distance-to-fault measurements.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|----------------------------------|---------|---------|---------|---------|
| Frequency Range | DC | | 27 | GHz |
| VSWR | | | 1.3:1 | |
| Phase Stability with Flexure | | | 4 | Degrees |
| Amplitude Stability with Flexure | | | 0.2 | dB |
| | | | | |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Handheld RF Analyzer Rugged Phase Stable Cable 3.5mm Male to 3.5mm Female Cable 100 cm Length Using PE-FF430 Coax, RoHS PE3C4012-100CM

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com





PE3C4012-100CM





RF Cable Assemblies Technical Data Sheet

PE3C4012-100CM

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|--------------------------------------------------------|-------------|------|----------------------------|------------------|------------|-------|
| Frequency | 12 | 18 | 27 | | | GHz |
| Insertion Loss (Max.) | 2.06 | 2.66 | 3.46 | | | dB |
| Power Handling (Max.) | 114 | 85 | 62 | | | Watts |
| Electrical Specification N Values at 25°C, sea leve | | | | | | |
| chanical Specification | ıs | | | | | |
| Cable Assembly Length* | | | | 39.37 in [100 cn | n] | |
| Cable | | | | | | |
| Cable Type | | | | PE-FF430 | | |
| Impedance | | | | 50 Ohms | | |
| Inner Conductor Type | | | | Solid | | |
| Inner Conductor Materia | and Plating | | | Copper, Silver | | |
| Dielectric Type Number of Shields | | | | 6 | | |
| Shield Layer 1 | | | | Silver Plated Co | opper Tape | |
| Shield Layer 2 | | | | Metalized Polym | | |
| Shield Layer 3 | | | | Silver Plated Co | | |
| Jacket Material | | | | TPE | _ | |
| Jacket Diameter | | | | 0.43 in [10.92 n | nm] | |
| One Time Minimum Ben | d Radius | | | 1.5 in [38.1 mm] | 1 | |
| | | | 1,200 lbs/in [21.43 Kg/mm] | | | |

Connectors

| Description | Connector 1 | Connector 2 3.5mm Female | |
|--------------------------------------|----------------------------|-----------------------------|--|
| Туре | 3.5mm Male | | |
| Impedance | 50 Ohms | 50 Ohms | |
| Contact Material and Plating | Beryllium Copper, Gold | Beryllium Copper, Gold | |
| Dielectric Type | PTFE | PTFE | |
| Outer Conductor Material and Plating | | Passivated Stainless Steel | |
| Body Material and Plating | Passivated Stainless Steel | Passivated Stainless Stee | |
| Coupling Nut Material and Plating | Passivated Stainless Steel | | |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Handheld RF Analyzer Rugged Phase Stable Cable 3.5mm Male to 3.5mm Female Cable 100 cm Length Using PE-FF430 Coax, RoHS PE3C4012-100CM

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451



RF Cable Assemblies Technical Data Sheet



PE3C4012-100CM

Mechanical Specification Notes: *All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater. Fieldfox® is a registered trademark of Keysight Technologies CellAdvisor® is registered trademark Viavi Solutions SiteHawk® is a registered trademark of Bird Technologies

Environmental Specifications

Temperature Operating Range

-55 to +105 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

• Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Handheld RF Analyzer Rugged Phase Stable Cable 3.5mm Male to 3.5mm Female Cable 100 cm Length Using PE-FF430 Coax, RoHS PE3C4012-100CM


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451





RF Cable Assemblies Technical Data Sheet

PE3C4012-100CM

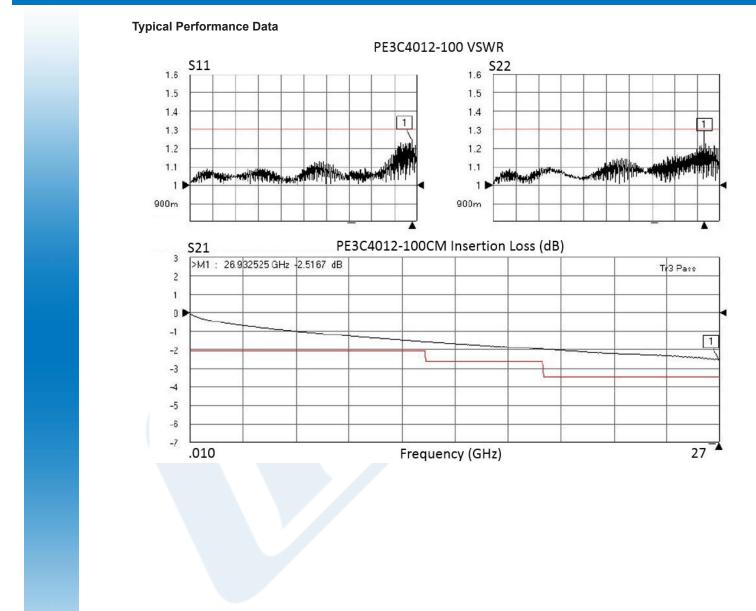

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Handheld RF Analyzer Rugged Phase Stable Cable 3.5mm Male to 3.5mm Female Cable 100 cm Length Using PE-FF430 Coax, RoHS PE3C4012-100CM


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451





RF Cable Assemblies Technical Data Sheet

PE3C4012-100CM

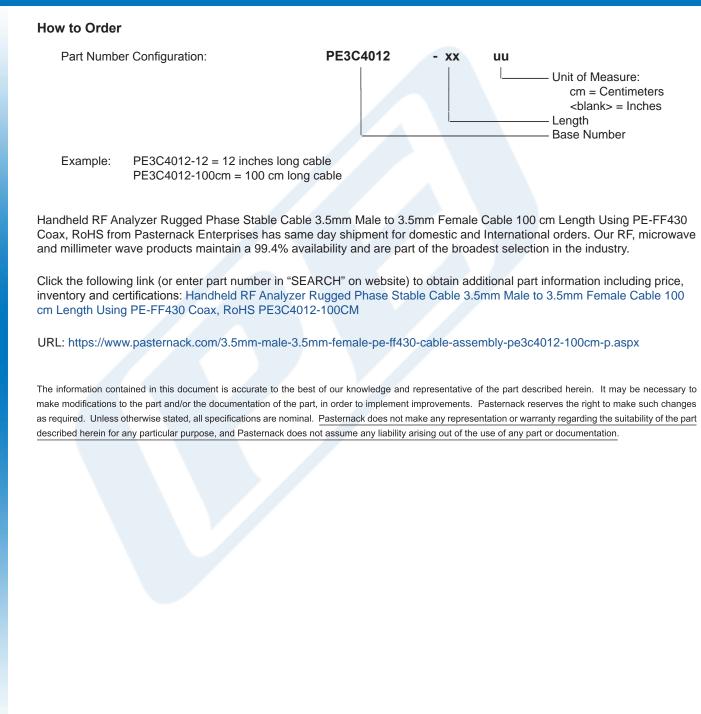

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

PE3C4012-100CM CAD Drawing Handheld RF Analyzer Rugged Phase Stable Cable 3.5mm Male to 3.5mm Female Cable 100 cm Length Using PE-FF430 Coax, RoHS

