



10 Watt RF Load Up to 18 GHz With N Female Input Black Anodized Aluminum Heatsink

RF Terminations Technical Data Sheet

PE6102

Features

- DC to 18 GHz Frequency Range
- VSWR 1.4:1 Max
- Max Power 10 Watt (CW)
- N Female Coaxial Interface

Applications

- Wireless
- Radar Systems
- Commercial and Military Communication
- SatCom
- Test and Measurement

Description

Pasternack's PE6102 is an RF termination (also called RF load or dummy load) that operates from DC to 18 GHz and handles up to 10 Watt (CW). Our N termination / load has a female gender. PE6102 N load termination offers 1.4:1 max VSWR. This Pasternack 10W N terminator has a heatsink body which is designed to provide adequate heat dissipation within its full frequency of operation.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
VSWR			1.4:1	
Input Power (CW) derated linearly to 2W at +125°C			10	Watts
Input Power (Peak) 5µs pulse, 0.05% duty cycle			500	Watts

Mechanical Specifications

Size	
Length	1.73 in [43.94 mm]
Width	1 in [25.4 mm]
Weight	0.089 lbs [40.37 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 Watt RF Load Up to 18 GHz With N Female Input Black Anodized Aluminum Heatsink PE6102](#)



10 Watt RF Load Up to 18 GHz With N Female Input
Black Anodized Aluminum Heatsink

RF Terminations Technical Data Sheet

PE6102

Configuration

Connector N Female
Connector Specification MIL-STD-348

Material Specifications

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Gold
Body	Passivated Stainless Steel	
Housing	Black Anodized Aluminum Heatsink	

Environmental Specifications

Temperature
Operating Range -65 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

10 Watt RF Load Up to 18 GHz With N Female Input Black Anodized Aluminum Heatsink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 Watt RF Load Up to 18 GHz With N Female Input Black Anodized Aluminum Heatsink PE6102](#)

URL: <https://www.pasternack.com/10-watts-n-female-rf-load-up-to-18-ghz-pe6102-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6102 CAD Drawing

10 Watt RF Load Up to 18 GHz With N Female Input Black Anodized Aluminum Heatsink

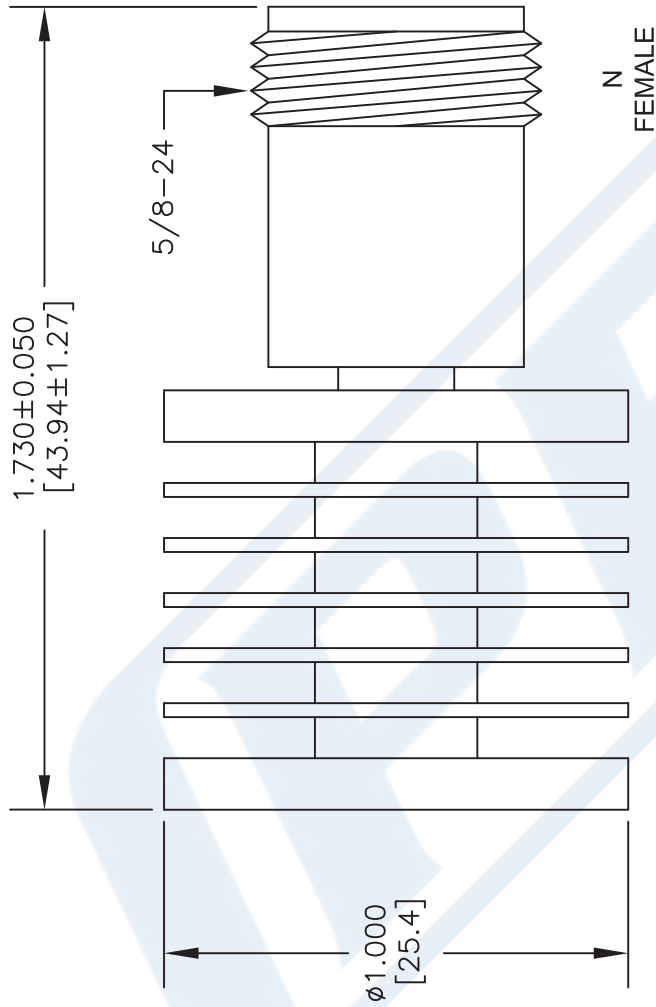

STANDARD TOLERANCES

DECIMAL ±0.01
 .XX ±0.005
 .XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE

PE6102

CAGE CODE **53919**

CAD FILE 060817

SCALE N/A

SIZE A

2233

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].