



SP6T Electromechanical Relay Normally Open Switch
DC to 10 GHz, N, 160 Watts, 28V Control

Electromechanical Relay Switches Technical Data Sheet

PE71S6195

Features

- Single Pole Six Throw Relay Switch
- DC to 10 GHz Frequency Range
- 1M Cycle Min Operating Life
- Normally Open Actuator
- Insertion Loss 0.6 dB max
- Isolation 60 dB min
- 160 Watts Avg Power Max
- Switching Sequence Break Before Make

Applications

- Test & Measurement
- Communications System
- Instrumentation

Description

The PE71S6195 is a Single Pole Six Throw Electromechanical Relay Switch that operates from DC to 10 GHz and has a rating of 160 Watts input power (CW) in a Break Before Make condition. The design features a Normally Open Actuator and is rated for 1M Life Cycles for high reliability operation. Insertion loss is specified from 0.25 dB max and Isolation from 80 dB min, with +28 Vdc operating voltage and performance is guaranteed over -25°C to +65°C. The package interface uses solder terminals and N Female connectors.

Electrical Specifications

Switch Type	SP6T, Reflective
Actuator Type	Normally Open
Switching Sequence	Break Before Make

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
Impedance		50		Ohms
Operating Voltage		28		Volts
Actuating Current @ 28 Volts		150		mA
VSWR			1.6:1	
Insertion Loss			0.6	dB
Isolation	60			dB
Input Power (CW) (at 10 GHz)			160	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T Electromechanical Relay Normally Open Switch DC to 10 GHz, N, 160 Watts, 28V Control PE71S6195](#)



SP6T Electromechanical Relay Normally Open Switch
DC to 10 GHz, N, 160 Watts, 28V Control

Electromechanical Relay Switches Technical Data

PE71S6195

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 4	4 to 8	8 to 10			GHz
VSWR, Max	1.25:1	1.4:1	1.6:1			
Insertion Loss, Max	0.25	0.4	0.6			dB
Isolation, Min	80	70	60			dB

Mechanical Specifications

Size

Length	2.3 in [58.42 mm]
Width/Diameter	2.47 in [62.74 mm]
Height	2.47 in [62.74 mm]
Weight	1.156 lbs [524.35 g]
Body Material and Plating	Aluminum
Package Type	Connectorized Module
Operating Life	1,000,000 Cycles
Switching Time	50 ms Max

Connectors

RF Connector Type	N Female
RF Connector Contact Material and Plating	Beryllium Copper, Gold
RF Connector Body Material and Plating	Passivated Stainless Steel
Control Connector	Solder Pin

Environmental Specifications

Temperature

Operating Range	-25 to +65 deg C
ESD Sensitivity	ESD Sensitive Material. Transport material in Approved ESD bags. Handle in approved ESD Workstation.



Environmental Specification Notes:
Designed to meet MIL-DTL-3928

Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T Electromechanical Relay Normally Open Switch DC to 10 GHz, N, 160 Watts, 28V Control PE71S6195](#)





SP6T Electromechanical Relay Normally Open Switch
DC to 10 GHz, N, 160 Watts, 28V Control

Electromechanical Relay Switches Technical Data

PE71S6195

Typical Performance Data

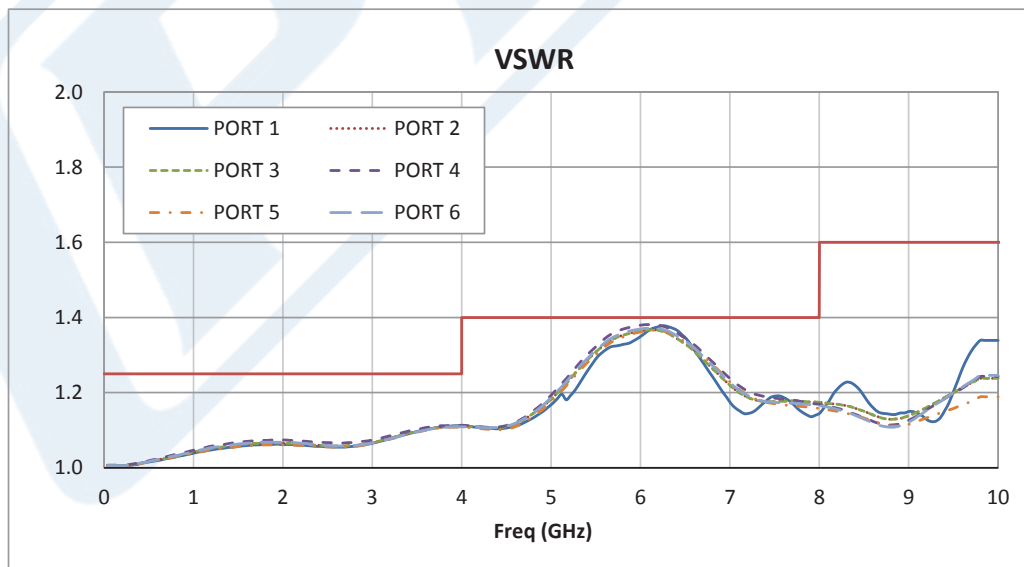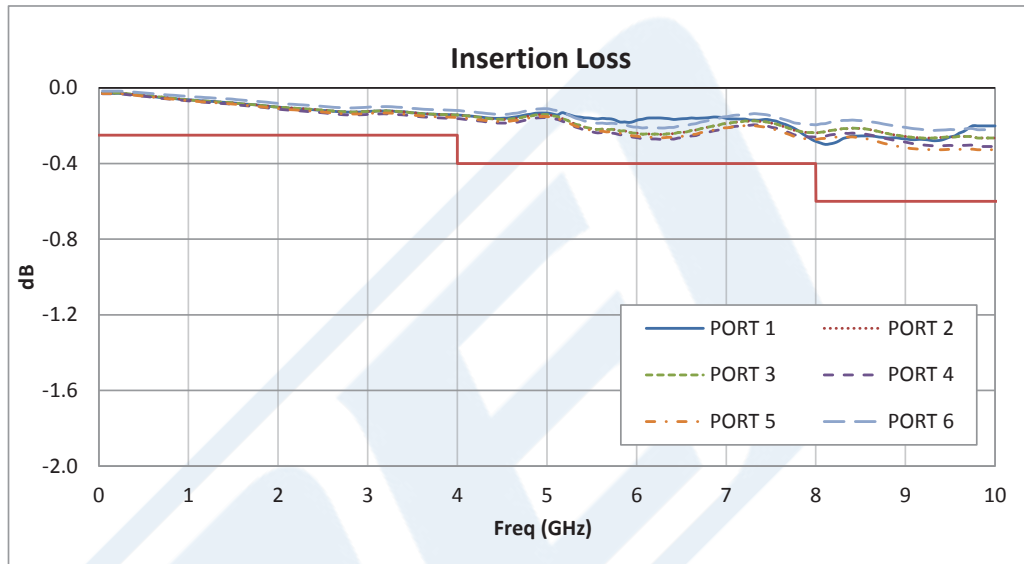


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T Electromechanical Relay Normally Open Switch DC to 10 GHz, N, 160 Watts, 28V Control PE71S6195](#)



SP6T Electromechanical Relay Normally Open Switch
DC to 10 GHz, N, 160 Watts, 28V Control

Electromechanical Relay Switches Technical Data

PE71S6195

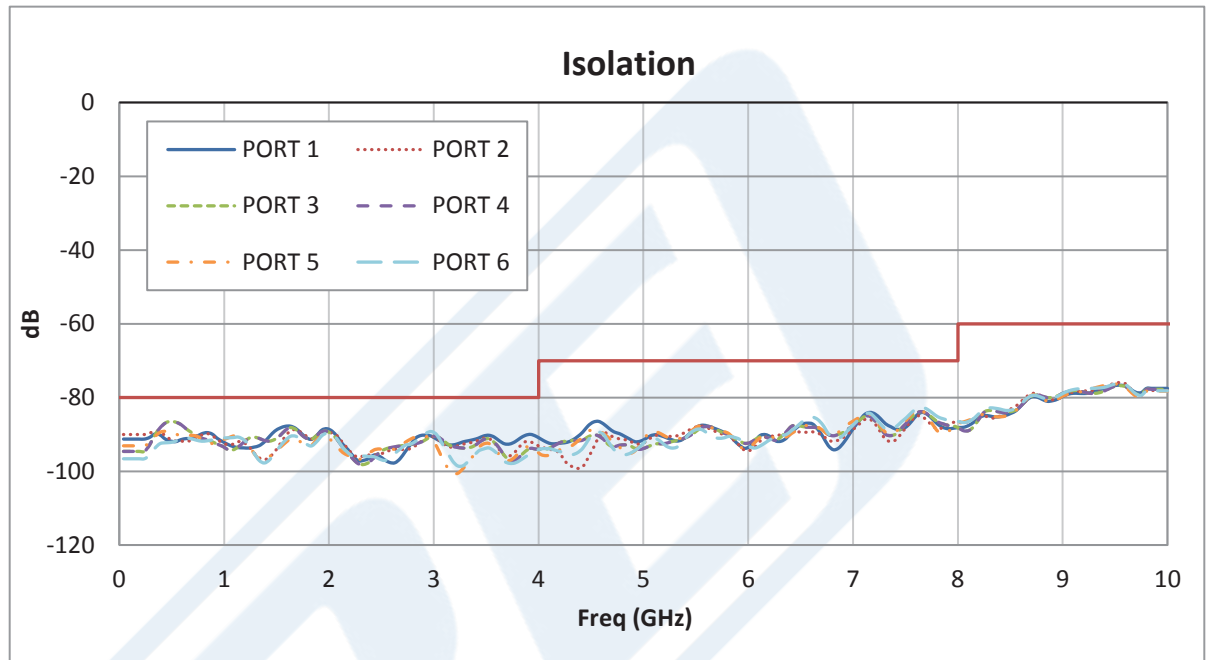

SP6T Electromechanical Relay Normally Open Switch DC to 10 GHz, N, 160 Watts, 28V Control from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T Electromechanical Relay Normally Open Switch DC to 10 GHz, N, 160 Watts, 28V Control PE71S6195](http://www.pasternack.com/n-sp6t-electromechanical-relay-switch-10-ghz-normally-open-pe71s6195-p.aspx)


URL: <http://www.pasternack.com/n-sp6t-electromechanical-relay-switch-10-ghz-normally-open-pe71s6195-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE71S6195 CAD Drawing

SP6T Electromechanical Relay Normally Open Switch

DC to 10 GHz, N, 160 Watts, 28V Control

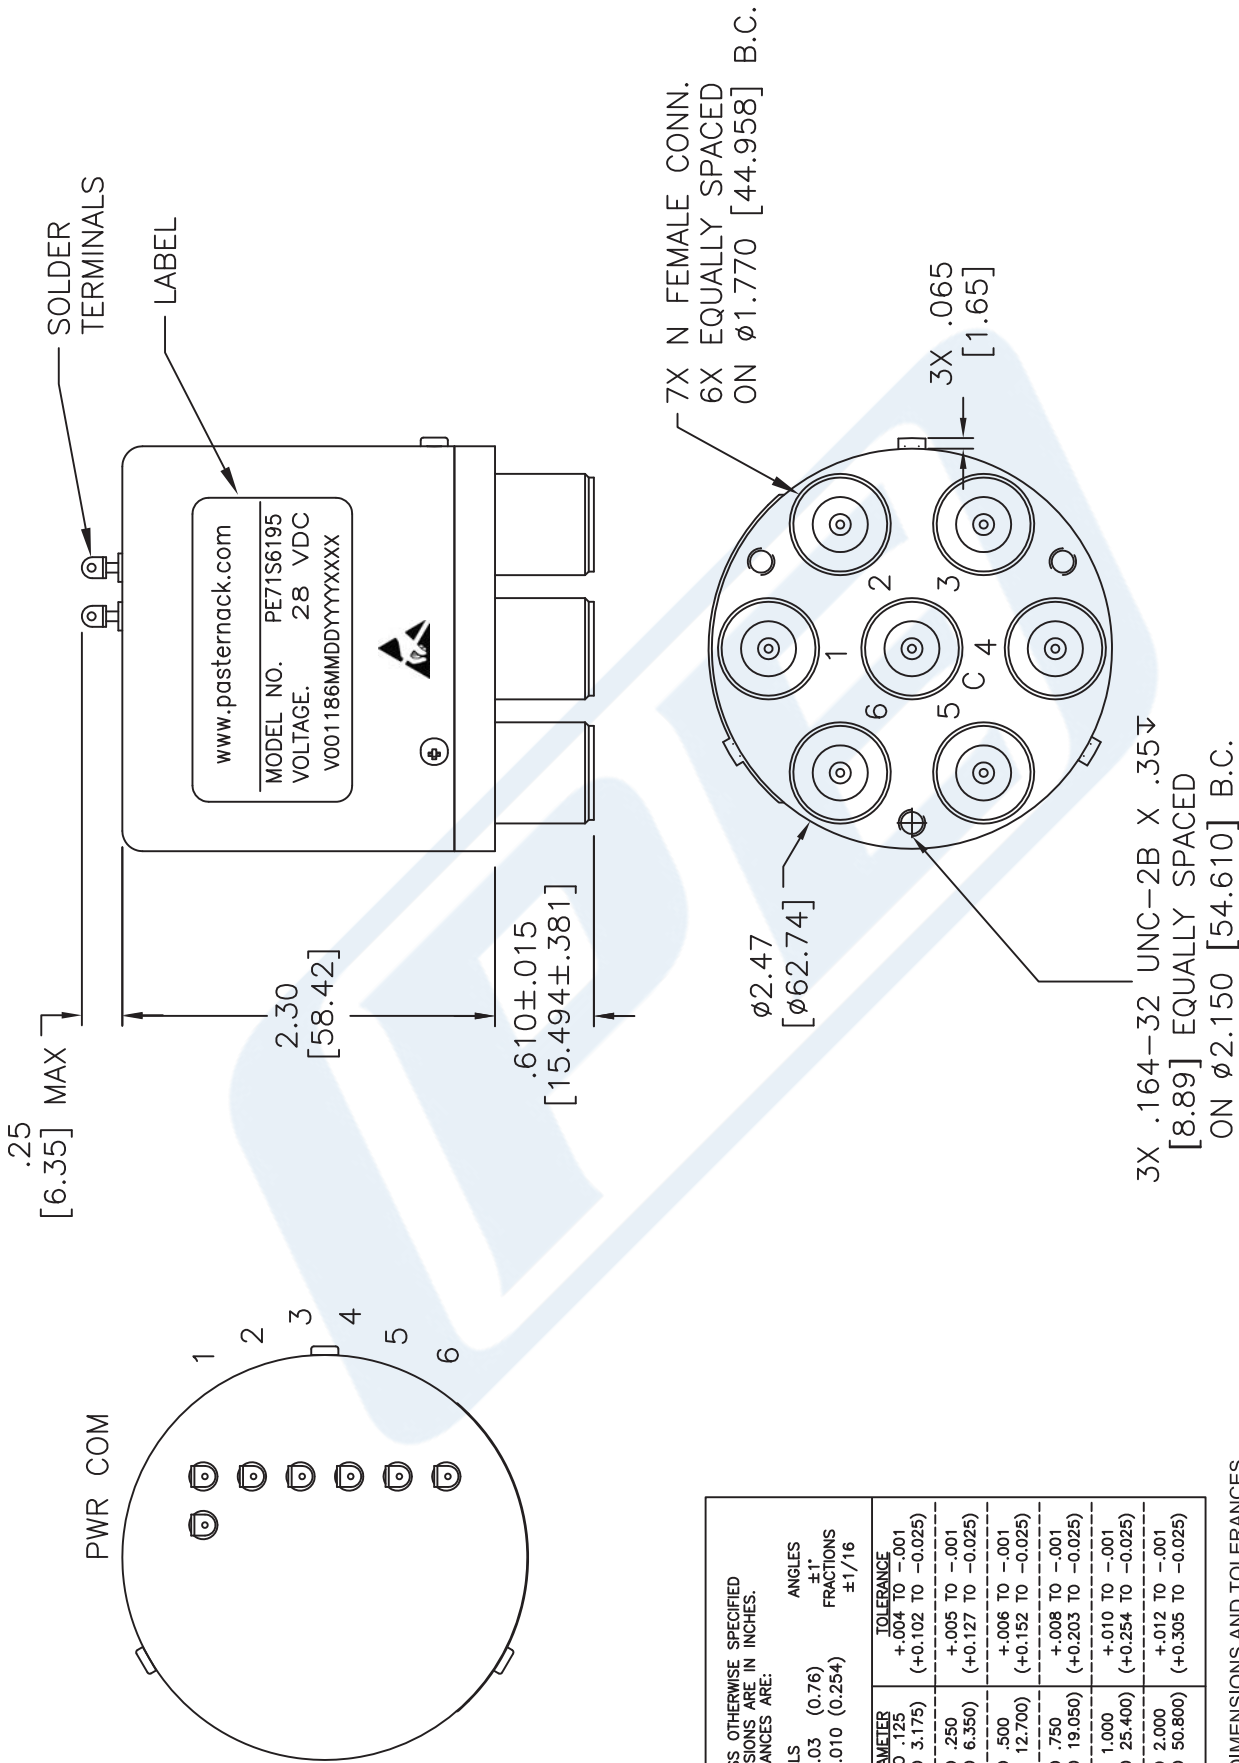

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		ANGLES ±1°	
DECIMALS	.XX ± .03 (0.76)	FRACTIONS	±1/16
HOLE DIAMETER		TOLERANCE	
.0135 TO .125 (0.343 TO 3.175)		+ .004 TO - .001 (+0.102 TO -0.025)	
.126 TO .250 (3.200 TO 6.350)		+ .005 TO - .001 (+0.127 TO -0.025)	
.251 TO .500 (6.375 TO 12.700)		+ .006 TO - .001 (+0.152 TO -0.025)	
.501 TO .750 (12.725 TO 19.050)		+ .008 TO - .001 (+0.203 TO -0.025)	
.751 TO 1.000 (19.075 TO 25.400)		+ .010 TO - .001 (+0.254 TO -0.025)	
1.001 TO 2.000 (25.425 TO 50.800)		+ .012 TO - .001 (+0.305 TO -0.025)	

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE71S6195

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 060815


SCALE N/A

SIZE A

2233

PE71S6195 CAD Drawing

SP6T Electromechanical Relay Normally Open Switch
DC to 10 GHz, N, 160 Watts, 28V Control

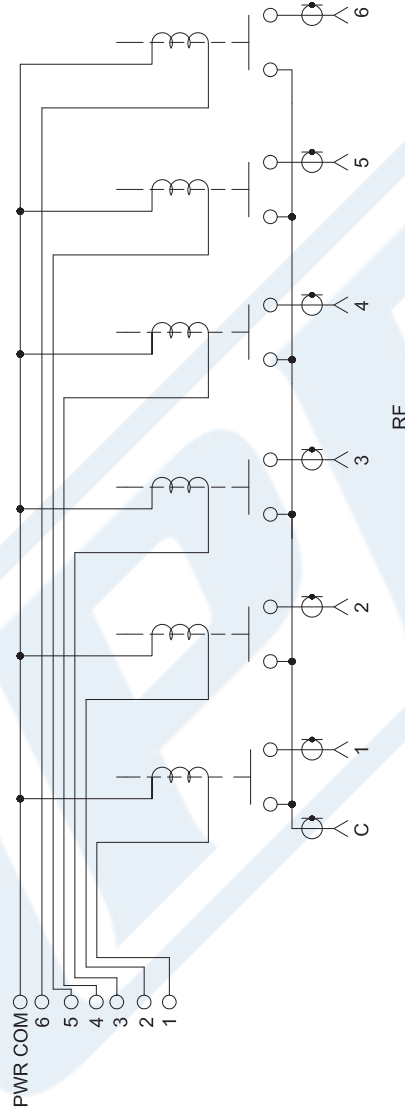

SCHEMATIC NORMALLY OPEN SHOWN IN DE-ENERGIZED POSITION

DWG TITLE

PE71S6195

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 060815

SCALE N/A

SIZE A

2233



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com